


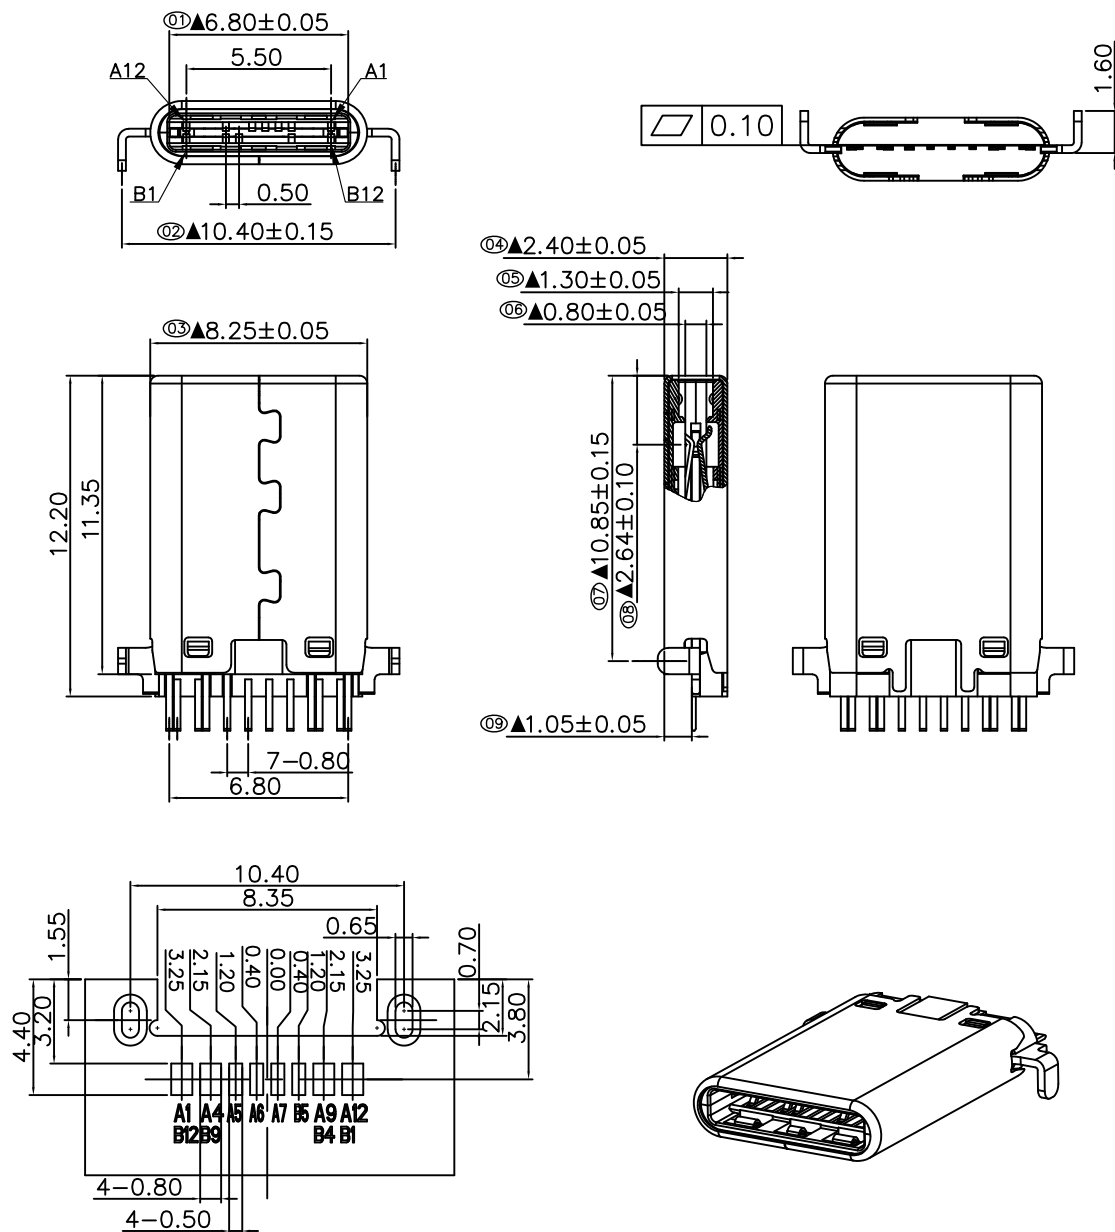

RECOMMENDED PCB LAYOUT
PCB THICKNESS 0.8mm
GENERAL TOLERANCE ± 0.05

NOTES:

- CURRENT RATING:
3.0A MAX.
- DIELECTRIC WITHSTAND VOLTAGE:
100VAC.
- TEMPERATURE RANGE:
 $-30^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
- CONTACT RESISTANCE:
40 MILLIONHM MAX.
- INSULATION RESISTANCE:
100 MEGOHMS MIN.
- INSERTION FORCE :
5N~20N.
- UNMATING FORCE:
8N~20N.
- DURABILITY:
10,000 CYCLES.
- ALL PRODUCTS COMPLY WITH RoHS
ENVIRONMENTAL REQUIREMENTS.
- MARK "▼" AS THE FOCUS,
FIRST ITEM INSPECTION.
- MARK "⊗" TO MEASURE DIMENSIONS
FOR FAI.

A1	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12
GND			VBUS	CC1	D+	D-		VBUS			GND
GND			VBUS				CC2	VBUS			GND
B12	B11	B10	B9	B8	B7	B6	B5	B4	B3	B2	B1

TABLE:

INSERT MOLD	SHELL	Stainless Steel;T=0.15mm;	Ni:50u"Min
	LATCH	Stainless Steel;;T=0.3mm;	Electroplated semi-nickel matte tin;50u"Min;
	EMC SPRING	Stainless Steel;T=0.10mm	-----
	CONTACT	Copper Alloy;T=0.15mm	Ni:50u"Min; Au:CONTACT AREA:1u", Solder AREA:Sn 50-100u"
	PLASTIC	LCP(G.F30%) BLACK.	-----
P/N	PART NAME	MATERIALS	FINISH



深圳市华宇创精密电子有限公司

TOLERANCE:

x.x ± 0.30
x.xx ± 0.25
x.xxx ± 0.15
x.' $\pm 2'$ x.x' $\pm 0.5'$



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

USB TYPE C 公座12P(5+7P) 铆合式沉板1.05 两脚DIP

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC675-USBC12-105

MOLD NO.

APPROVED BY:

邱敏

DATE :


2014-02-23

DRAW NO:


HYC-2601071049

SHEET NO.


1 OF 1

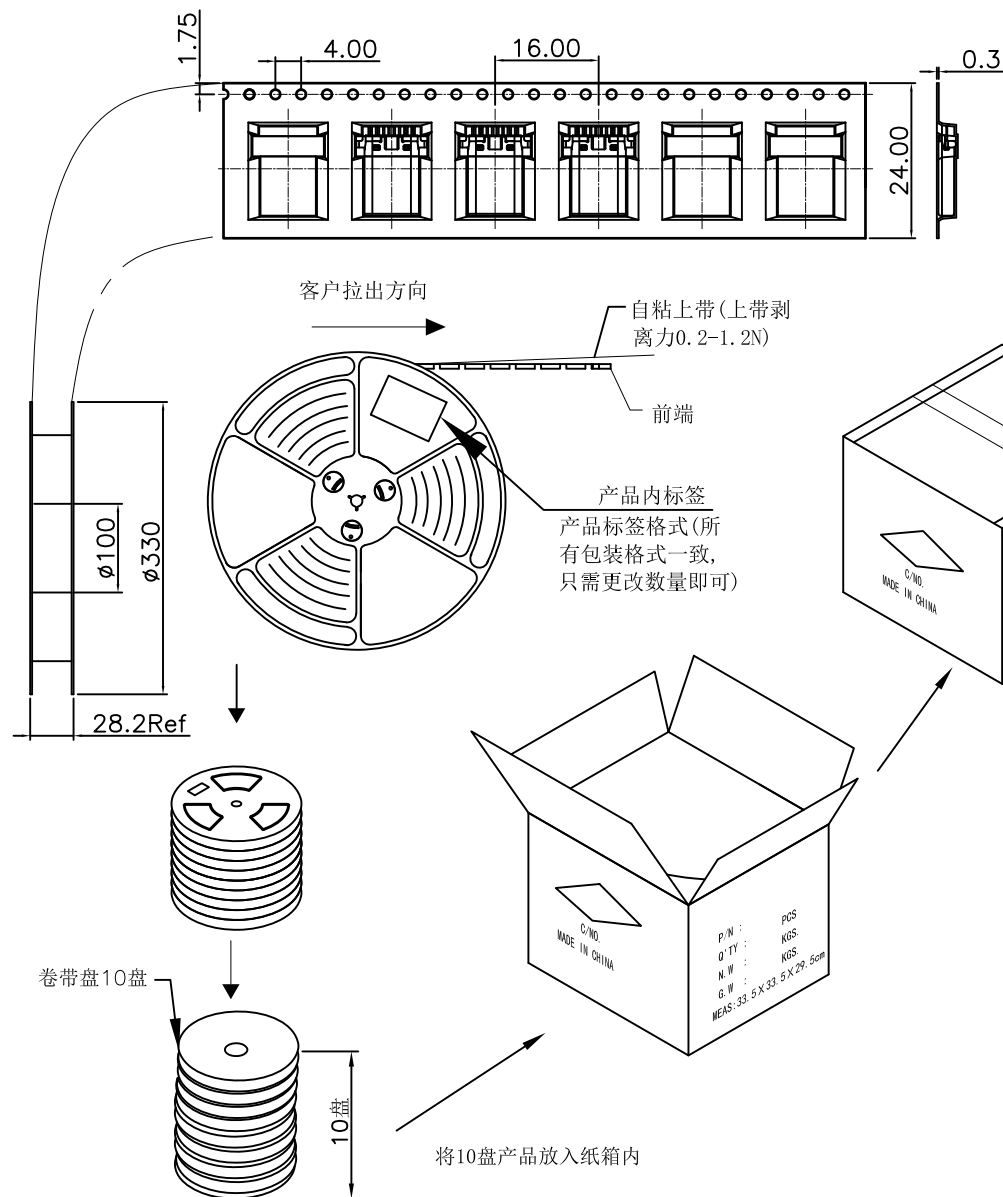

包装示意图:

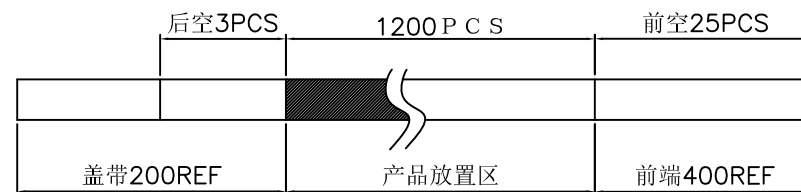

产品外标签

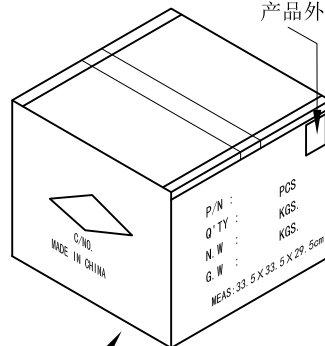

备注:

1. 把上下载带送入载带机进行调整, 然后将产品按照指定的方式摆入下载带中, 开动卷带机进行卷装(每卷包1200PCS), 卷装完成后需用上带缠绕最少20CM;
2. 在卷装OK的每卷盘面的指定位置上贴上物料和RoHS标签装入纸箱内; 每箱装10盘
3. 纸箱用封箱带将其封好, 胶带要求工字型, 不可遮住标签;
4. 如果客户对包装标签另有要求, 请按客户要求作业; 有未满之零数箱需用缓冲材料填充;
5. 上载带剥离力: 0.2-1.2N.;



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5"

UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY:

陈一鸣

CHECKED BY:

马跃

APPROVED BY:

邱敏

DATE:

2014-02-23

DATE:

2014-02-23

DATE:

2014-02-23

PART NAME:

包装图

PART NO.

MOLD NO.

DRAW NO:

SHEET NO.

1 OF 1