




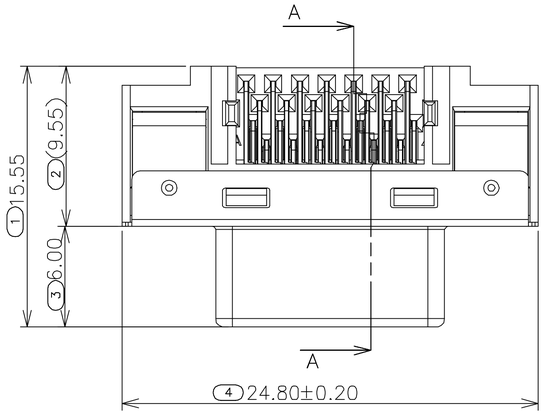


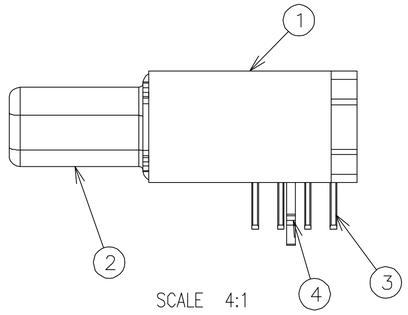


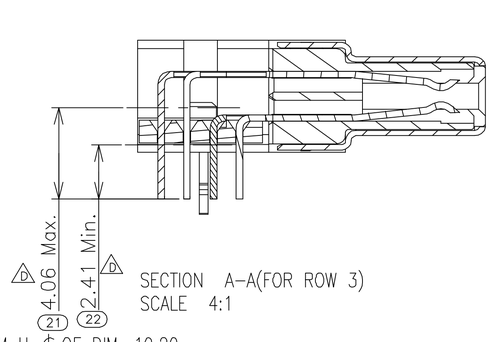


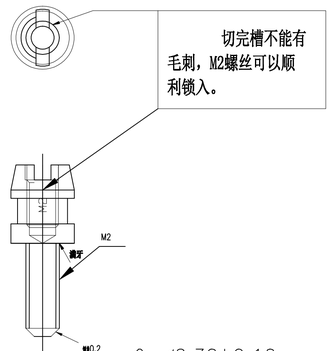




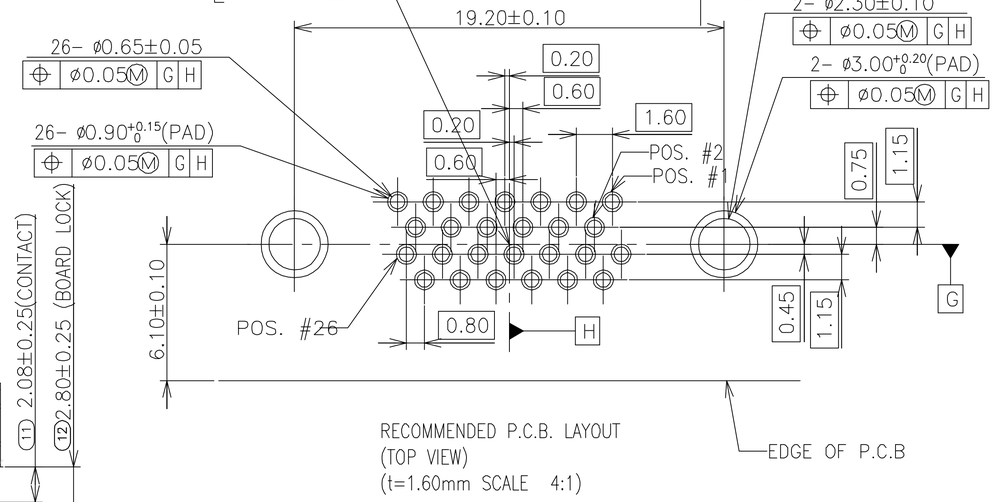

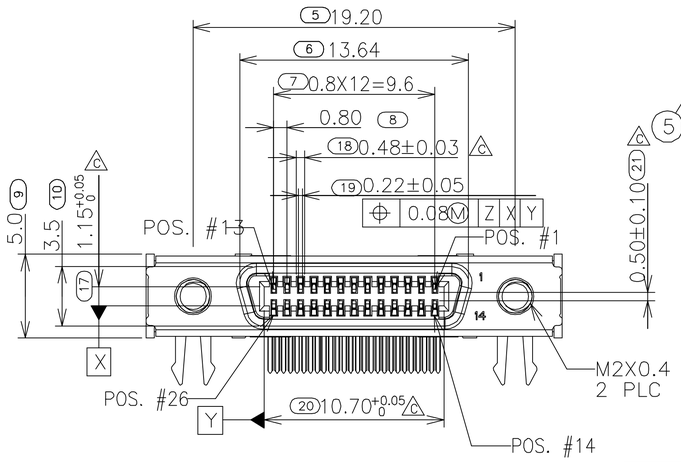

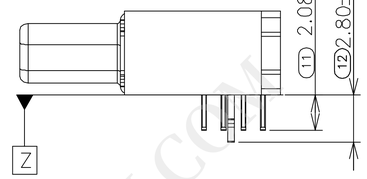

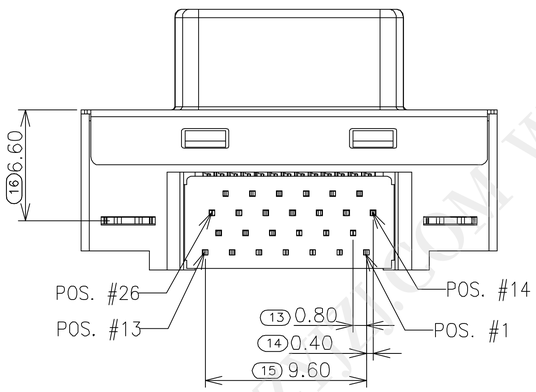

Rated voltage	**30V AC (r.m.s.)**
Rated current	**0.3 A**
Insulation resistance	**Over 500 megohms at 100V DC**
Dielectric withstanding voltage	**250V AC (r.m.s.)**
Contact resistance	**70 milliohms or less** (for combination of MA or MA1 and LFDT) **100 milliohms or less** (for combination with MA1 and W1LFDT)

ITEM	NAME	Q'TY	PART#	MATERIAL/FINISH
6	TINE PLATE	1	I-HMR20-B26K00	PA9T GF33% BLACK
5	NUT	2	H-HMR20-B26K0	COPPER ALLOY
4	BOARD LOCK	2	H-HMR20-A0200	PHOSPHOR BRONZE
3	CONTANCT	26	T-HMR20-10X00	PHOSPHOR BRONZE,Au
2	SHELL	1	S-HMR20-F26200	SPCC NICKEL
1	HOUSING	1	I-HMR20-A26K00	PA9T GF33% BLACK

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SDR 26PIN母座弯插板
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC70-SDR26-248
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
SCALE:1:1 SIZE: A4			DRAW NO: HYC-2310111559
			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM