


www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

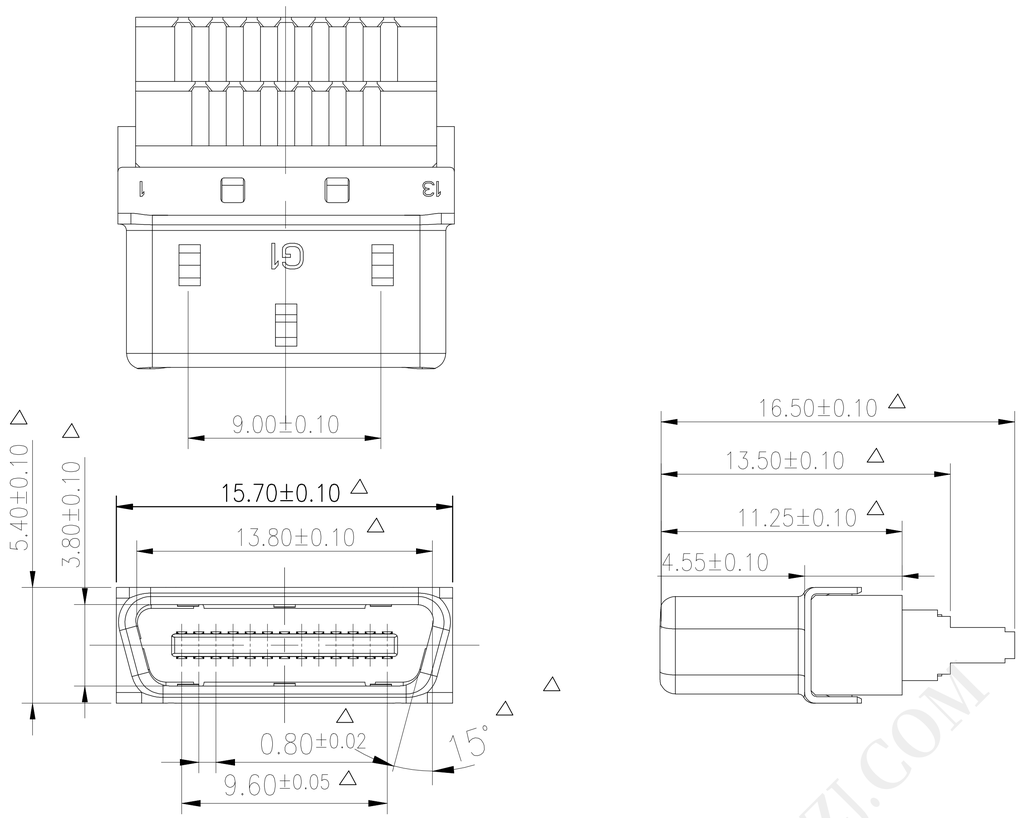

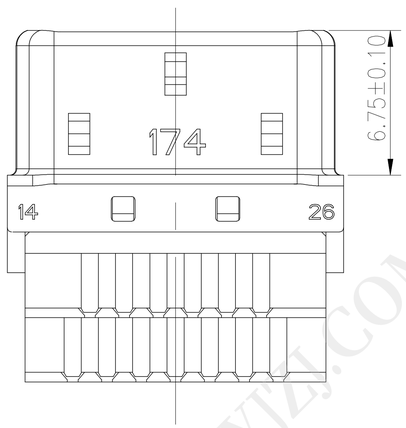

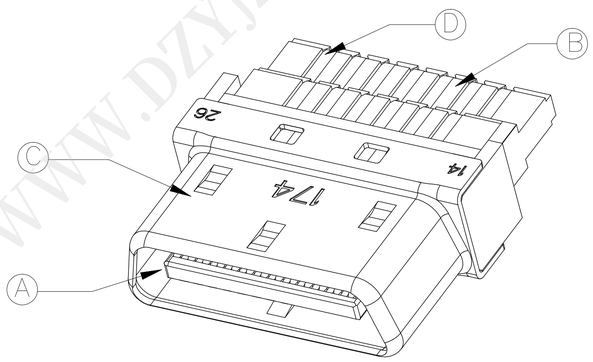

3D VIEW

Outline

HDR series connectors are very small surface mount (SMT) interface connectors with their contacts arranged at a pitch of 0.8 mm, designed for the purpose of saving extra space on printed circuit boards.

Features

- Long-life design allowing up to 5,000 mating cycles
- Low profile with overall height of 5mm from the PCB surface
- Sequential structure allowing up to two stacked connections
- One-touch-lock-type and detachable / re-attachable housing
- EMI/ESD-shielded and over-molded type metal housing
- IDC type connector on the cable end allows simultaneous termination

Principal Applications

Portable information terminals, smaller-sized office automation equipment, and their peripherals

Electrical Characteristics

Rated voltage	125V AC (r.m.s.)
Rated current	0.5 A
Insulation resistance	Over 1000 megohms at 250V DC
Dielectric withstanding voltage	350V AC (r.m.s.)
Contact resistance	70 milliohms or less

NO	DESCRIPTION	QTY	MATERIAL	PLATING & COLOR
D	TERMINAL	26	COPPER ALLOY	GOLD FLASH ON AU3U" MATING AREA, 100u"MIN TIN PLATED ON SOLDERING 50u"NICKEL UNDER PLATING OVERALL
C	SHELL	1	SPCC	NICKEL 60u"MIN
B	COVER	1	LCP-E130I	BACK UL94V-0
A	HOUSING	1		

HOAUC

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SDR 26PIN焊线公头	
UNIT: mm [inch]	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC71-SDR26-165
SCALE:1:1	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
SIZE: A4			DRAW NO:	HYC-2310111606
			SHEET NO.	1 OF 1

WWW.DZYJZJ.COM