



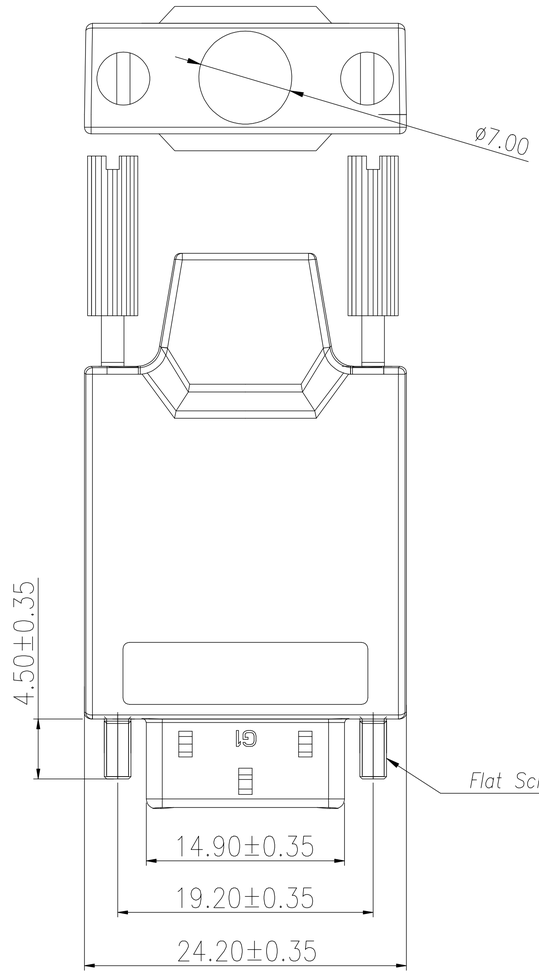


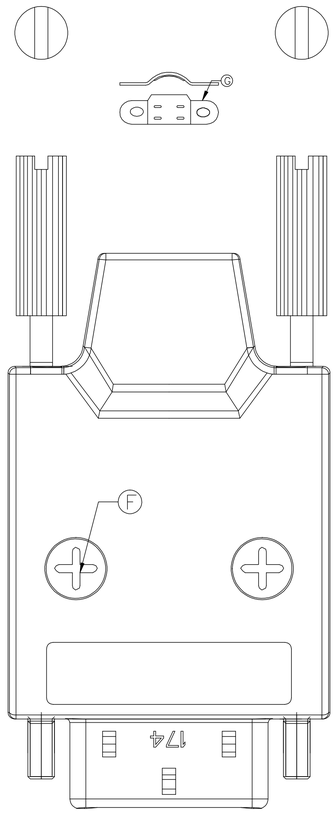

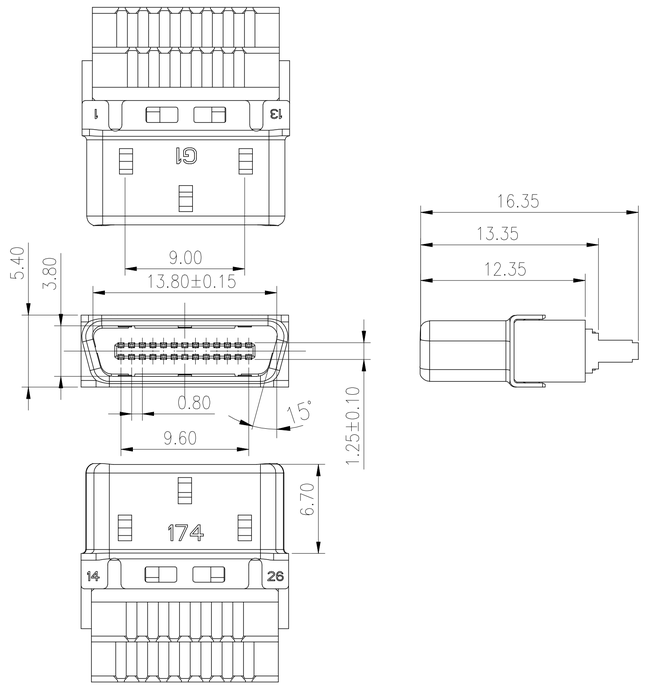

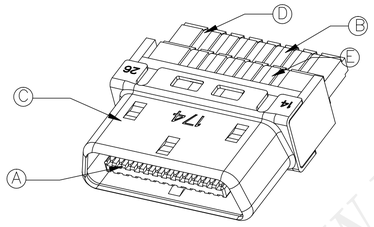

3D VIEW

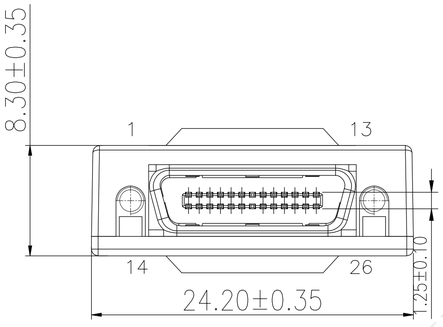

Electrical Characteristics

Rated voltage	125V AC (r.m.s.)
Rated current	0.5 A
Insulation resistance	Over 1000 megohms at 250V DC
Dielectric withstanding voltage	350V AC (r.m.s.)
Contact resistance	70 milliohms or less

NO.	MATERIAL	QTY	MATERIAL	PLATING & COLOR
I	SHIELD	2	zinc alloy	Ni 80u"Min
H	CABLE CLIPPER	1	SPCC T=0.80mm	Ni 80u"Min
G	FLAT SOREW	2	SPCC	Ni 80u"Min
F	FLAT SOREW	4	SPCC	Ni 80u"Min
E	LONG CONTACT	13	C2680-EH T=0.30mm	GOLD FLASH AU3U" ON CONTACTAREA 100U"TIN PLATING ON SOLDER TAILS 80U"ALL OVER NICKEL PLATING.
D	SHORT CONTACT	13		
C	SHELL	1	SPCC T=0.30mm	Ni 80u"Min
B	COVER	1	LCP+15%GF UL94-V0	BLACK
A	INSULATOR	1	LCP+15%GF UL94-V0	BLACK

深圳市华宇创精密电子有限公司

HOAUC

TOLERANCE:
X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X.° ±2° X.X° ±0.5°

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME:	SDR 26PIN焊线公头配锌合金螺杆
CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC72-SDR26-242
APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
		DRAW NO:	HYC-2310111613
		SHEET NO.	1 OF 1

WWW.DZYJZJ.COM