


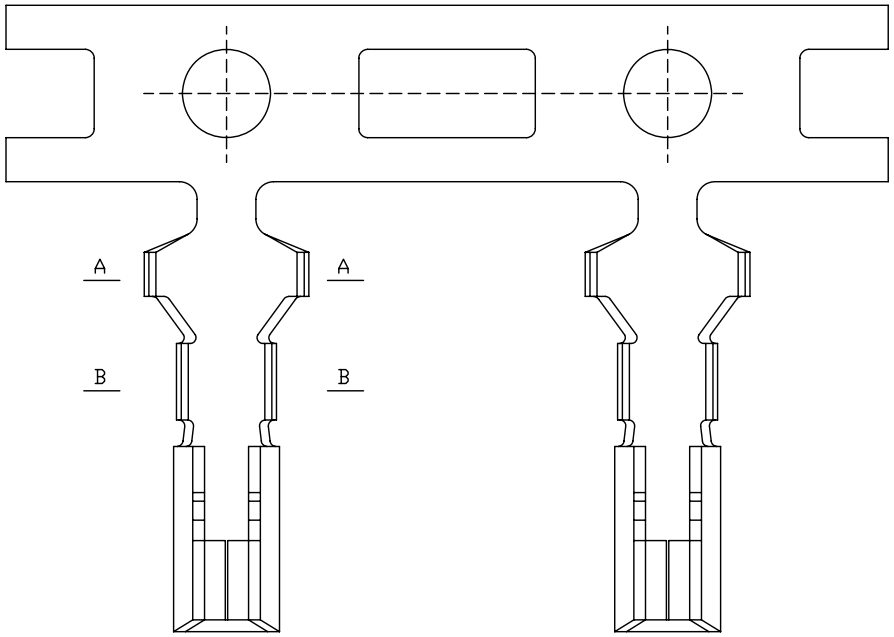


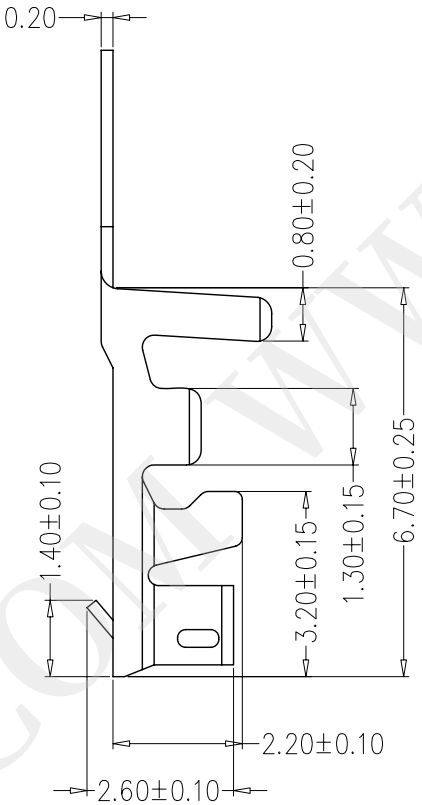




SEC:A-A



SEC:B-B




SPECIFICATIONS


1、Current Rating: 3A AC, DC
2、Voltage Rating: 250V AC, DC
3、Temperatuer Range: -25℃～+85℃
4、Contact Resistance: 20mΩ Max
5、Insulation Resistance: 1000MΩ Min
6、Withstanding Voltang: 1000V AC/minute
7、Material:Phosphoric bronze Tin-plated
8、Applicable Wire Sizes:AWG#22~28#


深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: XA母端	
UNIT: mm [inch]	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC94-T-250
			MOLD NO.	
SCALE:1:1 SIZE: A4	APPROVED BY: 柯南	DATE : 2014-02-23	DRAW NO:	HYC-2206151558
			SHEET NO.	1 OF 1


WWW.DZYJZJ.COM

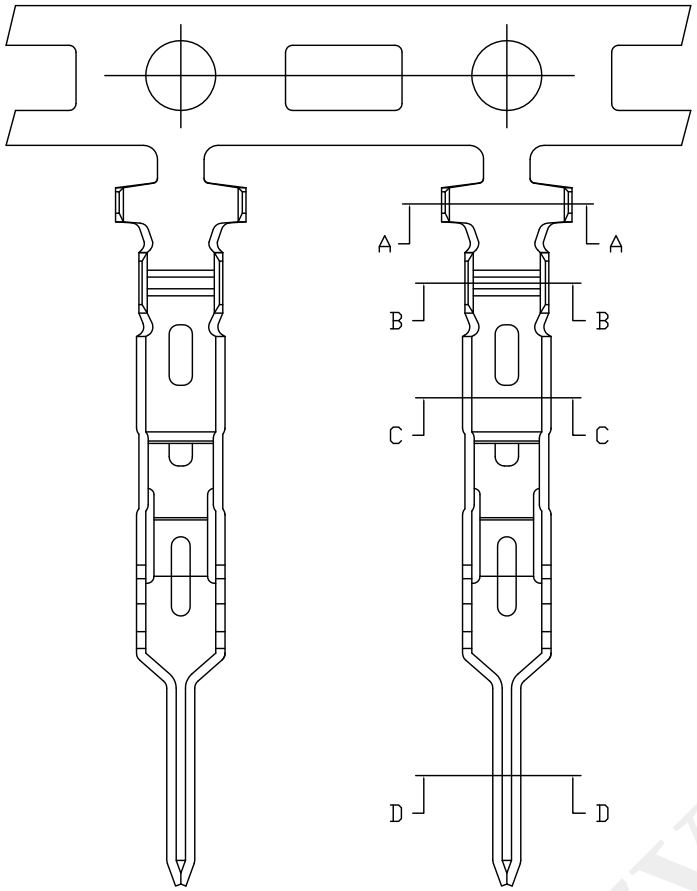










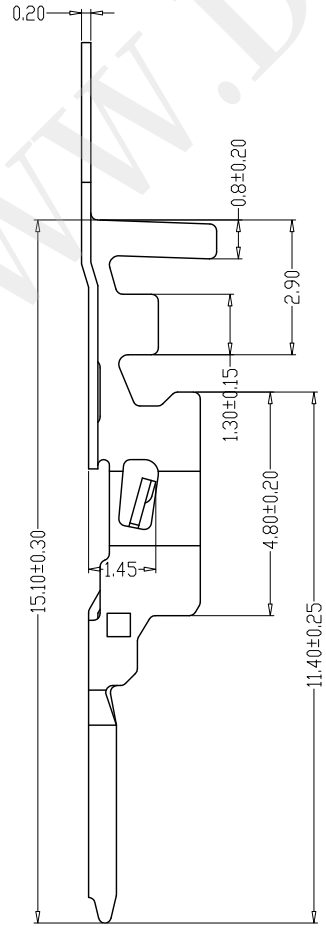


SPECIFICATIONS


1、Current Rating: 3A AC, DC
2、Voltage Rating: 250V AC, DC
3、Temperatuer Range: -25℃～+85℃
4、Contact Resistance: 20mΩ Max
5、Insulation Resistance: 1000MΩ Min
6、Withstanding Voltang: 1500V AC/minute
7、Material:Phosphoric bronze Tin-plated
8、Applicable Wire Sizes:AWG#20~28#


深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: XA公端
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO. HYC94-RT-250
UNIT: mm [inch]			MOLD NO.
	APPROVED BY: 邱敏	DATE: 2014-02-23	DRAW NO: HYC-2206151558
SCALE:1:1	SIZE: A4		SHEET NO. 1 OF 1

WWW.DZYJZJ.COM

www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

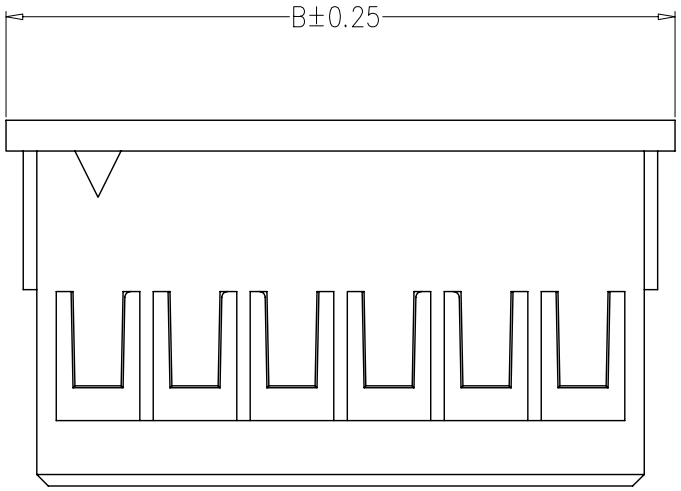

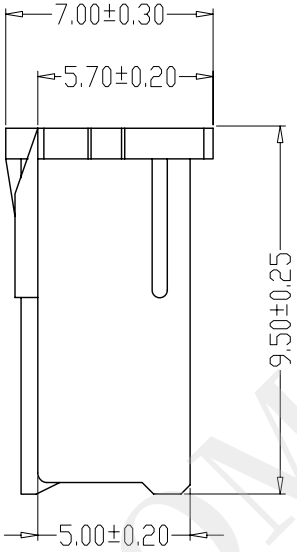

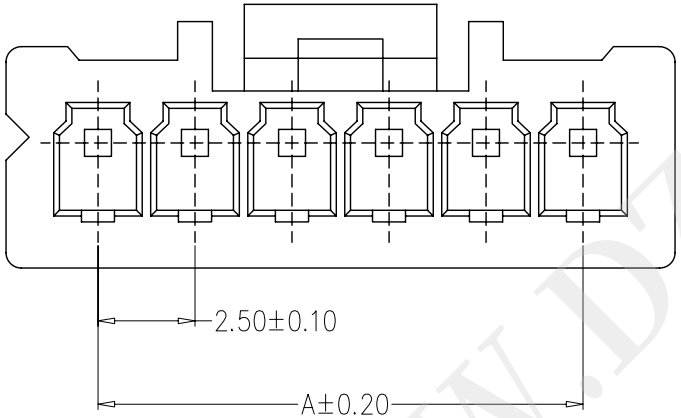

SPECIFICATIONS

1、Current Rating：3A AC，DC
2、Voltage Rating：250V AC，DC
3、Temperatuer Range：-25℃～+85℃
4、Contact Resistance：20mΩ Max
5、Insulation Resistance：1000MΩ Min
6、Withstanding Voltang：1000V AC/minute
7、Material:Housing:Nylon66,UL94V-0


编　号	尺寸（mm）	
	A	B
HYC94-02P-250	2.50	7.20
HYC94-03P-250	5.00	9.70
HYC94-04P-250	7.50	12.20
HYC94-05P-250	10.00	14.70
HYC94-06P-250	12.50	17.20
HYC94-07P-250	15.00	19.70
HYC94-08P-250	17.50	22.20
HYC94-09P-250	20.00	24.70
HYC94-10P-250	22.50	27.20
HYC94-11P-250	25.00	29.70
HYC94-12P-250	27.50	32.20
HYC94-13P-250	30.00	34.70
HYC94-14P-250	32.50	37.20
HYC94-15P-250	35.00	39.70


深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY：陈一鸣	DATE：2014-02-23	PART NAME: XA单排孔座 公壳
	CHECKED BY: 马跃	DATE：2014-02-23	PART NO. HYC94-NP-250
UNIT: mm [inch]	APPROVED BY: 柯南	DATE：2014-02-23	MOLD NO. / DRAW NO. HYC-2206151614
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1


WWW.DZYJZJ.COM


www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

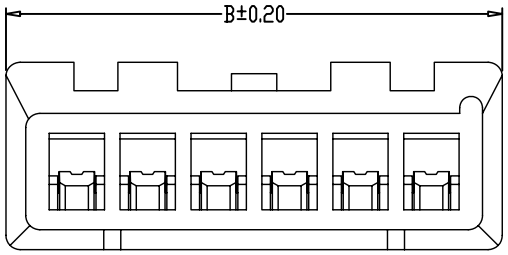

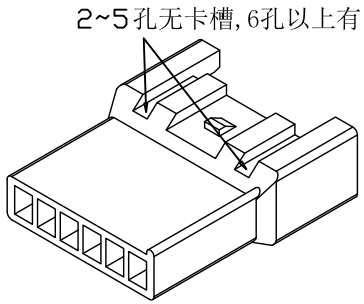

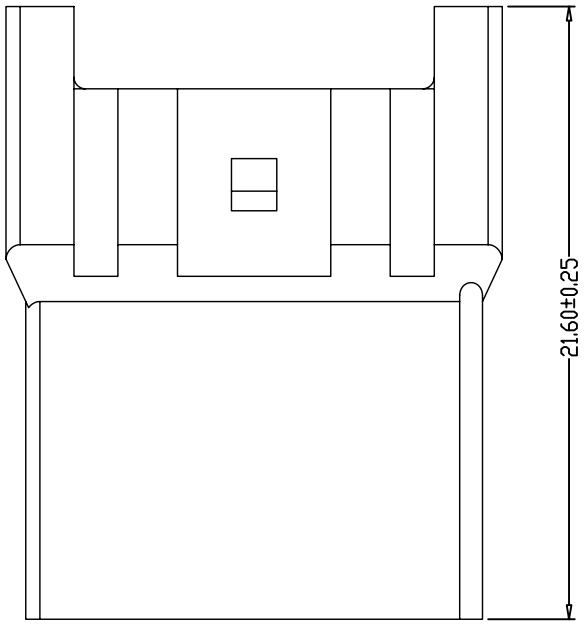

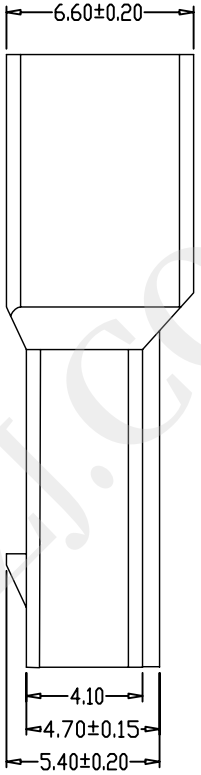

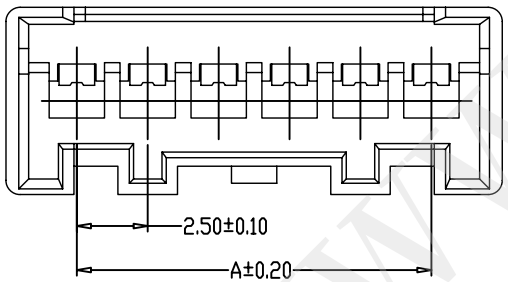

SPECIFICATIONS

1、Current Rating: 3A AC, DC
2、Voltage Rating: 250V AC, DC
3、Temperatuer Range: -25℃～+85℃
4、Contact Resistance: 20mΩ Max
5、Insulation Resistance: 1000MΩ Min
6、Withstanding Voltang: 1000V AC/minute
7、Material:Housing:Nylon66,UL94V-0


编　号	尺寸（mm）	
	A	B
HYC94-02R-250	2.50	7.50
HYC94-03R-250	5.00	10.00
HYC94-04R-250	7.50	12.50
HYC94-05R-250	10.00	15.00
HYC94-06R-250	12.50	17.50
HYC94-07R-250	15.00	20.00
HYC94-08R-250	17.50	22.50
HYC94-09R-250	20.00	25.00
HYC94-10R-250	22.50	27.50
HYC94-11R-250	25.00	30.00
HYC94-12R-250	27.50	32.50
HYC94-13R-250	30.00	35.00
HYC94-14R-250	32.50	37.50
HYC94-15R-250	35.00	40.00


深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: XA单排孔座 母壳
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO. HYC94-NR-250
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE: 2014-02-23	MOLD NO. / DRAW NO. HYC-2206151614
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM

www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

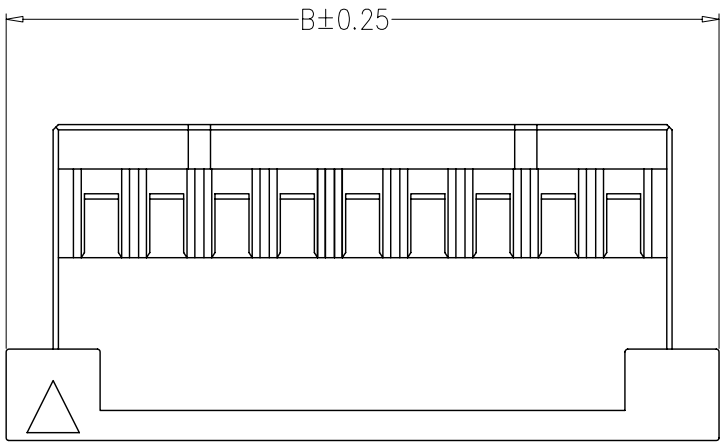

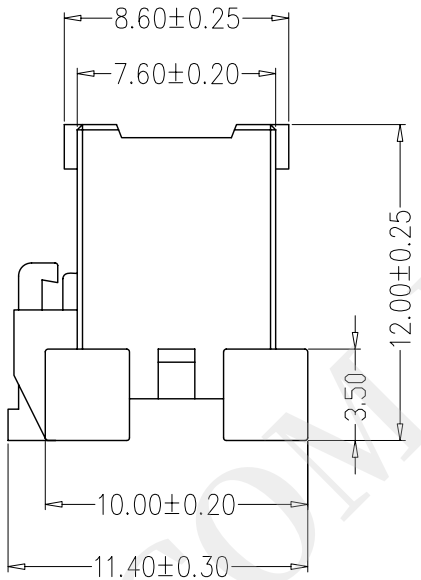

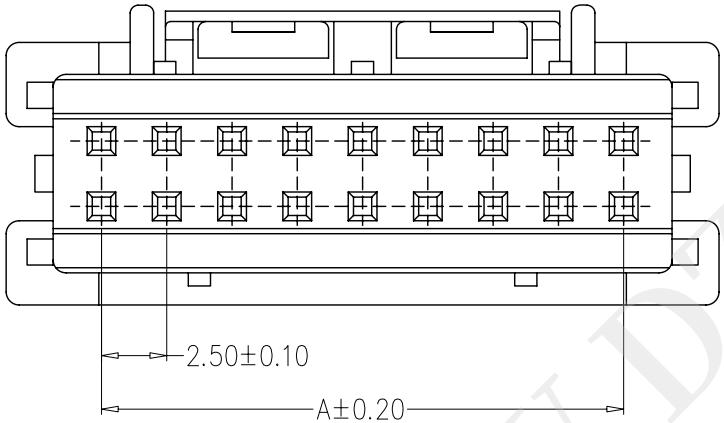

SPECIFICATIONS


1、Current Rating: 3A AC, DC
2、Voltage Rating: 250V AC, DC
3、Temperatuer Range: -25℃～+85℃
4、Contact Resistance: 20mΩ Max
5、Insulation Resistance: 1000MΩ Min
6、Withstanding Voltang: 1000V AC/minute
7、Material:Housing:Nylon66,UL94V-0


编　号	尺寸（mm）	
	A	B
HYC94-2X04Y-250	7.50	15.00
HYC94-2X05Y-250	10.00	17.50
HYC94-2X06Y-250	12.50	20.00
HYC94-2X07Y-250	15.00	22.50
HYC94-2X08Y-250	17.50	25.00
HYC94-2X09Y-250	20.00	27.50
HYC94-2X10Y-250	22.50	30.00
HYC94-2X11Y-250	25.00	32.50
HYC94-2X12Y-250	27.50	25.00
HYC94-2X13Y-250	30.00	37.50
HYC94-2X14Y-250	32.50	40.00
HYC94-2X20Y-250	47.50	55.00

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: XA双排孔座
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO.: SEE TABLE
UNIT: mm [inch]			MOLD NO.:
	APPROVED BY: 柯南	DATE: 2014-02-23	DRAW NO.: HYC-2206151614
SCALE:1:1	SIZE: A4		SHEET NO.: 1 OF 1


WWW.DZYJZJ.COM

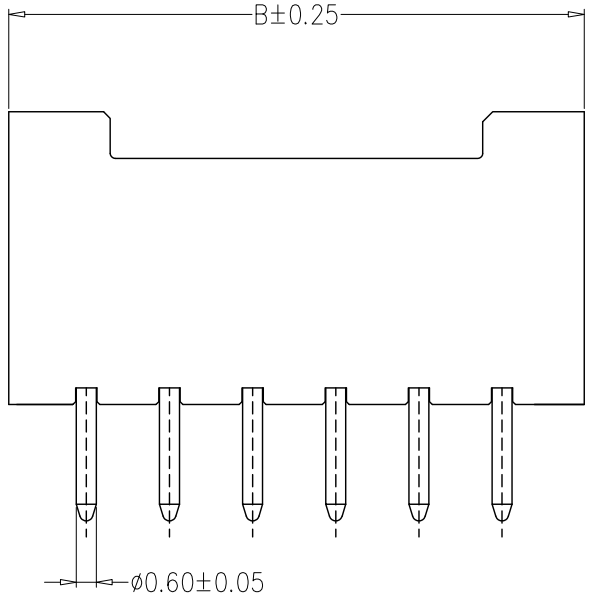


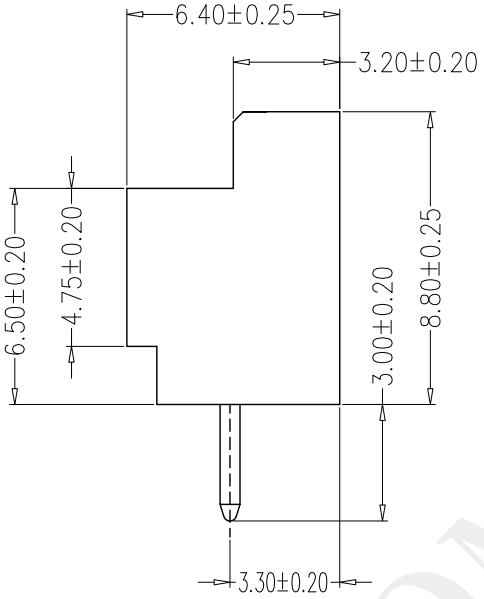


SPECIFICATIONS
1、Current Rating: 3A AC, DC
2、Voltage Rating: 250V AC, DC
3、Temperatuer Range: -25℃～+85℃
4、Contact Resistance: 20mΩ Max
5、Insulation Resistance: 1000MΩ Min
6、Withstanding Voltang: 1000V AC/minute
7、Material:Wafer Nylon66,UL94V-0
PIN Brass Tin-plated

编 号	尺寸（mm）	
	A	B
HYC94-02A-250	2.50	7.50
HYC94-03A-250	5.00	10.00
HYC94-04A-250	7.50	12.50
HYC94-05A-250	10.00	15.00
HYC94-06A-250	12.50	17.50
HYC94-07A-250	15.00	20.00
HYC94-08A-250	17.50	22.50
HYC94-09A-250	20.00	25.00
HYC94-10A-250	22.50	27.50
HYC94-11A-250	25.00	30.00
HYC94-12A-250	27.50	32.50
HYC94-13A-250	30.00	35.00
HYC94-14A-250	32.50	37.50
HYC94-15A-250	35.00	40.00
HYC94-20A-250	47.50	52.50

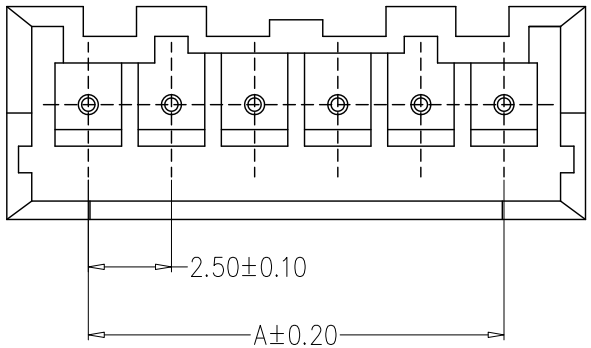

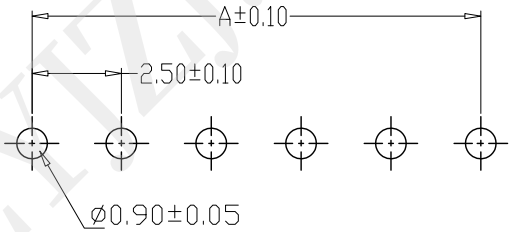

PCB LAYOUT

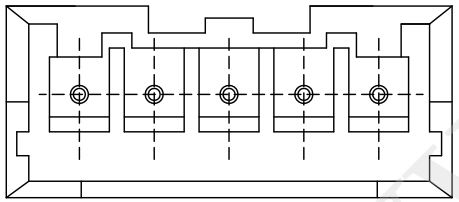



2~5A

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: XA单排直针
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO.: SEE TABLE
UNIT: mm [inch]	APPROVED BY: 柯南	DATE: 2014-02-23	MOLD NO.:
SCALE:1:1 SIZE: A4			DRAW NO: HYC-2206151614
			SHEET NO.: 1 OF 1


WWW.DZYJZJ.COM

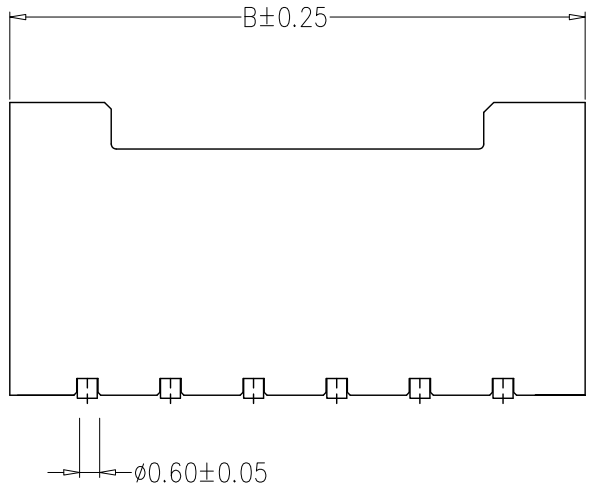


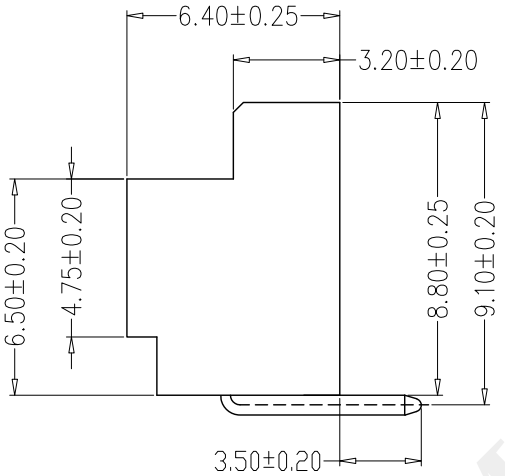

SPECIFICATIONS


1、Current Rating: 3A AC, DC
2、Voltage Rating: 250V AC, DC
3、Temperatuer Range: -25℃～+85℃
4、Contact Resistance: 20mΩ Max
5、Insulation Resistance: 1000MΩ Min
6、Withstanding Voltang: 1000V AC/minute
7、Material:Wafer Nylon46,UL94V-0
PIN Brass Tin-plated

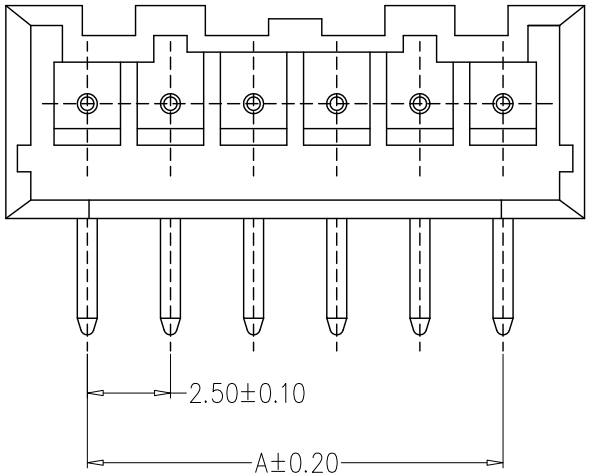

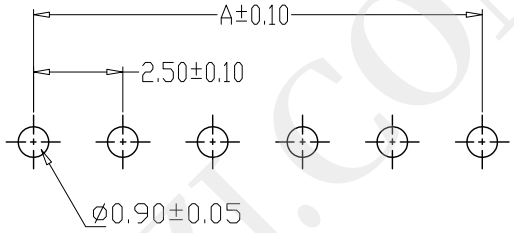

PCB LAYOUT

编 号	尺寸（mm）	
	A	B
HYC94-02AW-250	2.50	7.50
HYC94-03AW-250	5.00	10.00
HYC94-04AW-250	7.50	12.50
HYC94-05AW-250	10.00	15.00
HYC94-06AW-250	12.50	17.50
HYC94-07AW-250	15.00	20.00
HYC94-08AW-250	17.50	22.50
HYC94-09AW-250	20.00	25.00
HYC94-10AW-250	22.50	27.50
HYC94-11AW-250	25.00	30.00
HYC94-12AW-250	27.50	32.50
HYC94-20AW-250	47.50	52.50

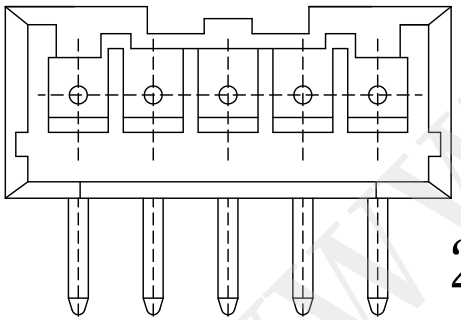


2~5A


深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: XA单排弯针	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	SEE TABLE
			MOLD NO.	
UNIT: mm [inch]	APPROVED BY: 柯南	DATE : 2014-02-23	DRAW NO:	HYC-2206151614
SCALE:1:1 SIZE: A4			SHEET NO.	1 OF 1


WWW.DZYJZJ.COM


www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

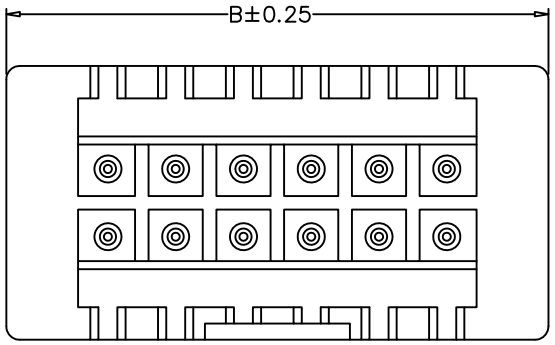


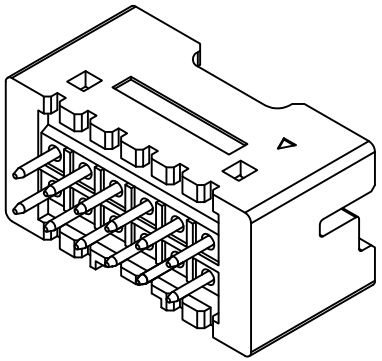

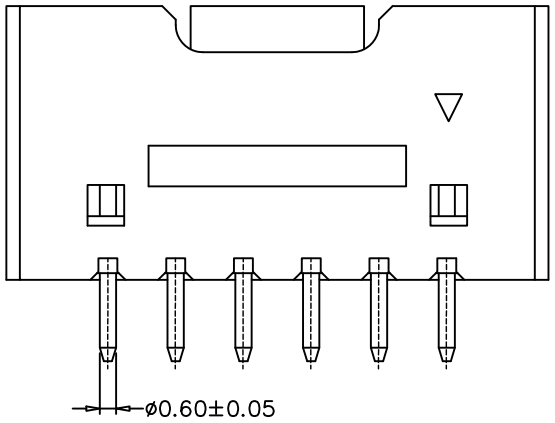

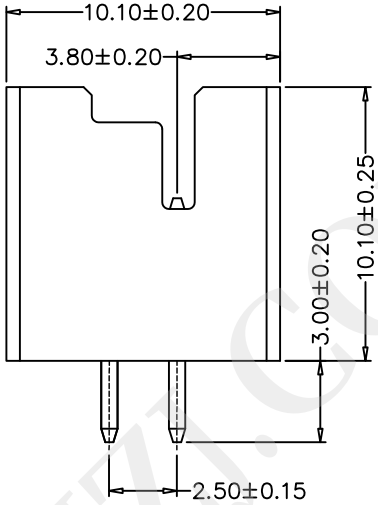

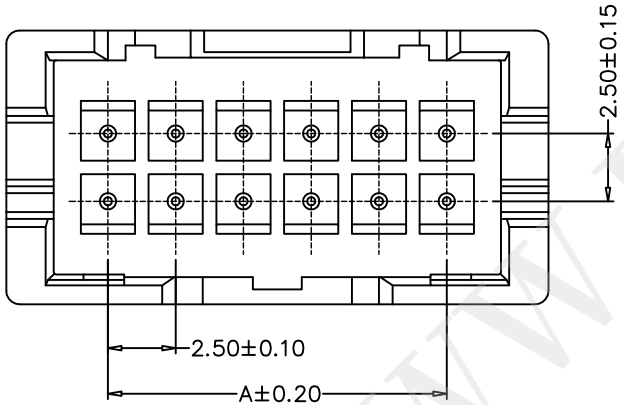

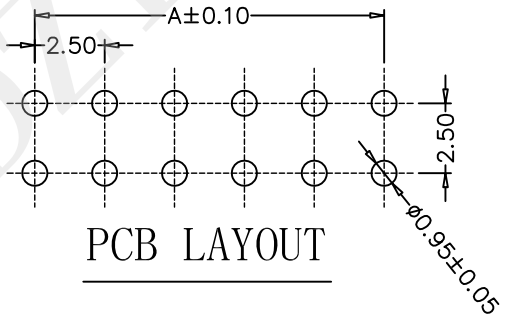

PCB LAYOUT

SPECIFICATIONS

1、Current Rating: 3A AC, DC
2、Voltage Rating: 250V AC, DC
3、Temperatuer Range: -25℃～+85℃
4、Contact Resistance: 20mΩ Max
5、Insulation Resistance: 1000MΩ Min
6、Withstanding Voltang: 1000V AC/minute
7、Material:Wafer Nylon66,UL94V-0
PIN Brass Tin-plated


编 号	尺寸（mm）	
	A	B
HYC94-2X04A-250	7.50	15.00
HYC94-2X05A-250	10.00	17.50
HYC94-2X06A-250	12.50	20.00
HYC94-2X07A-250	15.00	22.50
HYC94-2X08A-250	17.50	25.00
HYC94-2X09A-250	20.00	27.50
HYC94-2X10A-250	22.50	30.00
HYC94-2X11A-250	25.00	32.50
HYC94-2X12A-250	27.50	25.00
HYC94-2X13A-250	30.00	37.50
HYC94-2X14A-250	32.50	40.00
HYC94-2X20A-250	47.50	55.00


深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: XA双排直针
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. SEE TABLE
UNIT: mm [inch]			MOLD NO.
	APPROVED BY: 柯南	DATE : 2014-02-23	DRAW NO: HYC-2206151614
SCALE:1:1	SIZE: A4		SHEET NO. 1 OF 1


WWW.DZYJZ.COM


www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

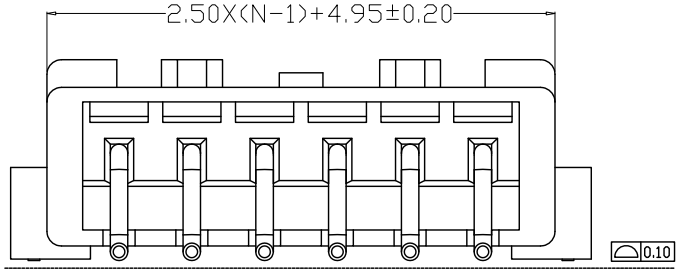

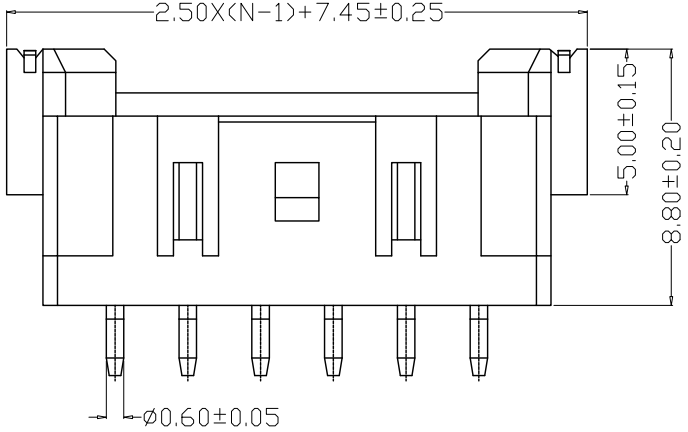


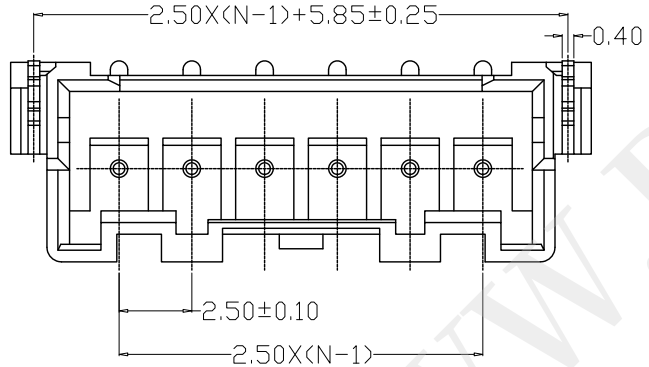

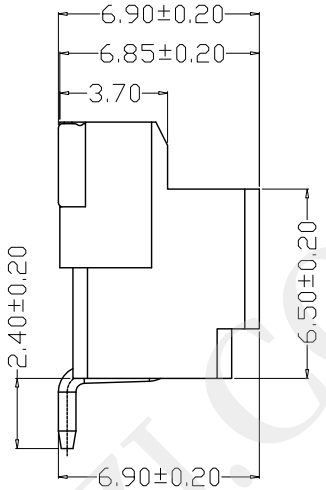

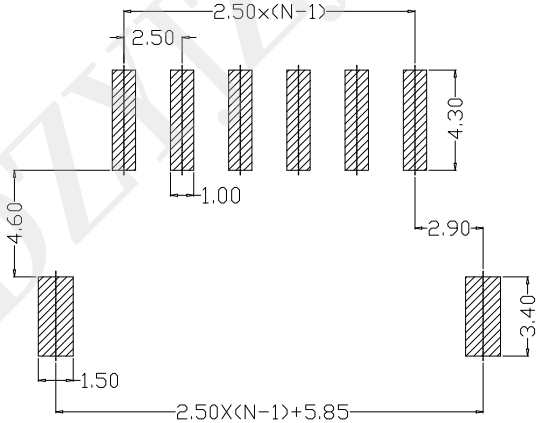

PCB LAYOUT

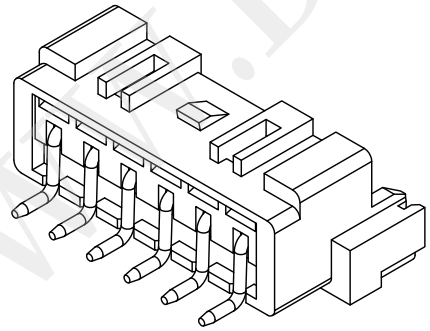


SPECIFICATIONS


1、Current Rating: 3A AC, DC
2、Voltage Rating: 250V AC, DC
3、Temperatuer Range: -25℃～+85℃
4、Contact Resistance: 20mΩ Max
5、Insulation Resistance: 1000MΩ Min
6、Withstanding Voltang: 1000V AC/minute
7、Material
Wafer: PA6T UL94V-0
PIN: C2680 Tin-plated
Fixed piece: C2680 Tin-plated


深圳市华宇创精密电子有限公司				
TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: XA 卧式贴片	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC94-WFN-250
			MOLD NO.	
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO:	HYC-2206151658
SCALE:1:1 SIZE: A4			SHEET NO.	1 OF 1


WWW.DZYJZJ.COM


www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267

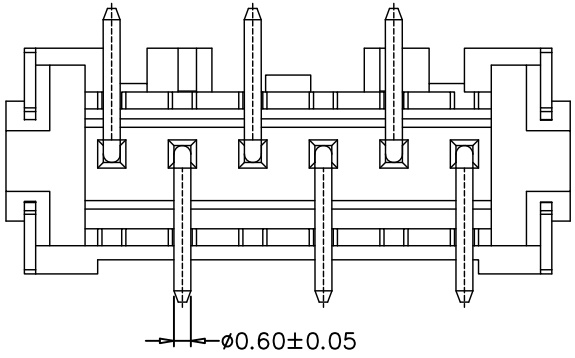


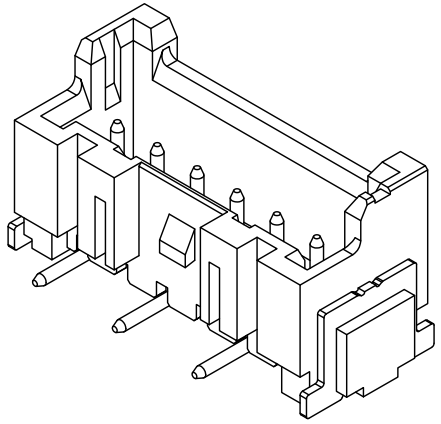

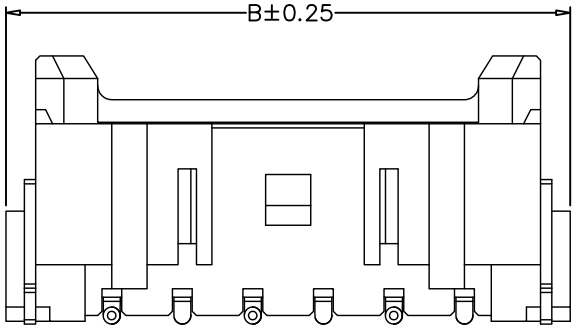

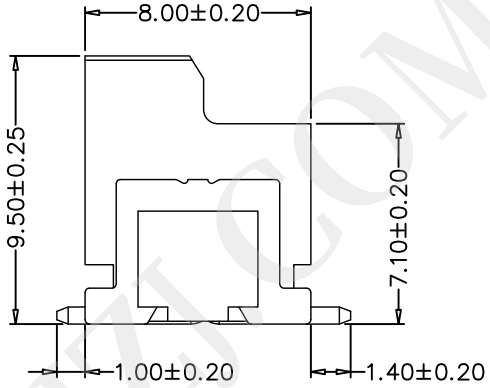

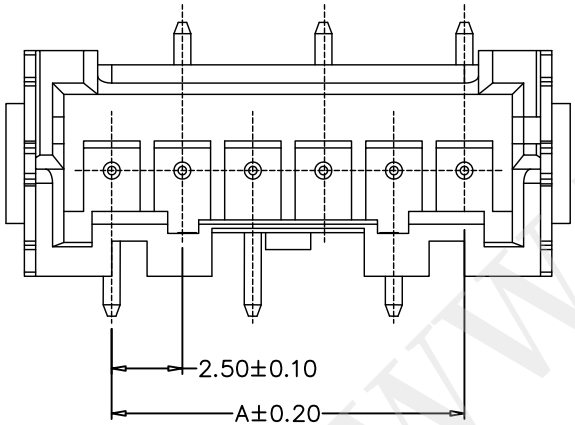

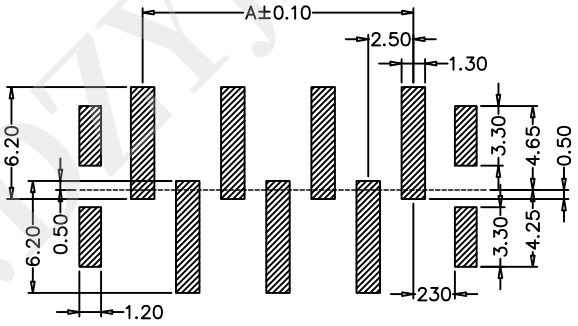

PCB LAYOUT

SPECIFICATIONS

1、Current Rating: 3A AC, DC
2、Voltage Rating: 250V AC, DC
3、Temperatuer Range: -25℃～+85℃
4、Contact Resistance: 20mΩ Max
5、Insulation Resistance: 1000MΩ Min
6、Withstanding Voltang: 1000V AC/minute
7、Material:Wafer PA6T,UL94V-0
PIN Brass Tin-plated
Fixed piece: C2680 Tin-plated

编 号	尺寸（mm）	
	A	B
HYC94-LF02-250	2.50	10.00
HYC94-LF03-250	5.00	12.50
HYC94-LF04-250	7.50	15.00
HYC94-LF05-250	10.00	17.50
HYC94-LF06-250	12.50	20.00
HYC94-LF07-250	15.00	22.50
HYC94-LF08-250	17.50	25.00
HYC94-LF09-250	20.00	27.50
HYC94-LF10-250	22.50	30.00
HYC94-LF11-250	25.00	32.50
HYC94-LF12-250	27.50	35.00
HYC94-LF15-250	35.00	42.50

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: XA 立式贴片
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO.: SEE TABLE
UNIT: mm [inch]	APPROVED BY: 邱敏	DATE: 2014-02-23	MOLD NO.:
SCALE:1:1 SIZE: A4			DRAW NO.: HYC-2206151614
			SHEET NO.: 1 OF 1

WWW.DZYJZ.COM