


RECOMMEND PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCE ±0.05

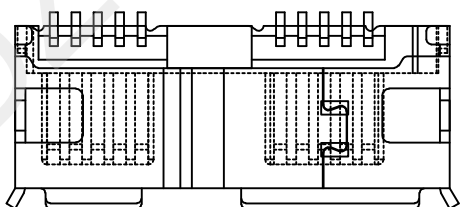

备注:

电气性能:

接触阻抗: 30 毫欧 (最大)

绝缘阻抗: 1000 兆欧 (最小)

耐高压: 500V AC 一分钟

材料: 塑胶: LCP

端子: C2680

外壳: C2680

电镀: 端子: 镀全金1u",

外壳: 全区域镀镍底50~80u",

镀雾锡100u".



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5' UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MICRO USB 3.0 插板12.55V
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC19-USBD10-125
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2405211933
			SHEET NO. 1 OF 1