
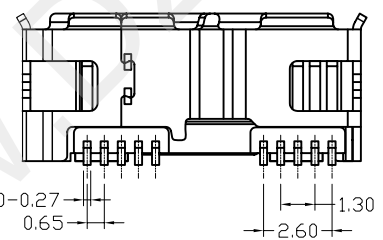

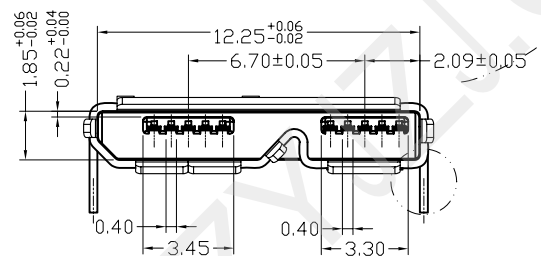




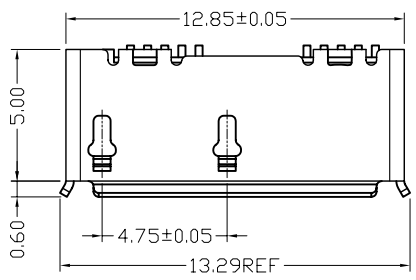


RECOMMEND PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCE ±0.05

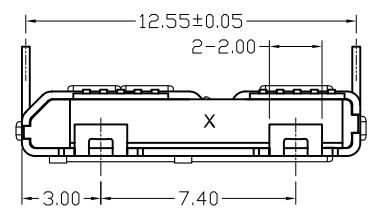

- NOTES:
- MECHANICAL:
 - MATING FORCE: 35N MAX.
 - UNMATING FORCE: 10N MIN,INITIAL.
 - 8~20N AFTER 10000 CYCLES.
 - DURABILITY: 5000 CYCLES MIN.
 - ELECTRICAL:
 - CURRENT: 1.0A
 - VOLTAGE: 30V MAX
 - WITHSTANDING VOLTAGE: 100V AC
 - CONTACT RESISTANCE: 30 mΩ MAX INITIAL;
 - 40 mΩ MAX AFTER 10000 CYCLES
 - ENVIRONMENTAL
 - OPERATING TEMPERATURE RANGE -30°C ~ +80°C
 - SALT SPRAY : 24 H AT 35%DC WITH 5%-SALT-SOLUTION CONCENTRATION.
 - PRODUCT SPEC:SP-MICRO USB-001
 - PACKAGE SPEC:DWG-PK MUB-OXX
 - PRODUCT MEET FOR ROHS STANDARD

The following part fittings of a machine

PART NAME	QTY	Material
Housing	1	LCP 130i 黑色
Terminal	10	C5191R-H,T=0.15mm:
shell	1	SUS304-1/2H,T=0.30mm

DESCRIPTION	DIM A
MICRO USB 3.0 DIP(12.55MM)+2DIP ; WITHOUT POST	1.70
MICRO USB 3.0 DIP(12.55MM)+2DIP ; WITHOUT POST	1.20
MICRO USB 3.0 DIP(12.55MM)+2DIP ; WITHOUT POST	0.85
MICRO USB 3.0 DIP(12.55MM)+2DIP ; WITHOUT POST	0.45



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MICRO USB 3.0插板12.55
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC16-USBD10-125
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HVC-USB17239019
			SHEET NO. 1 OF 1