

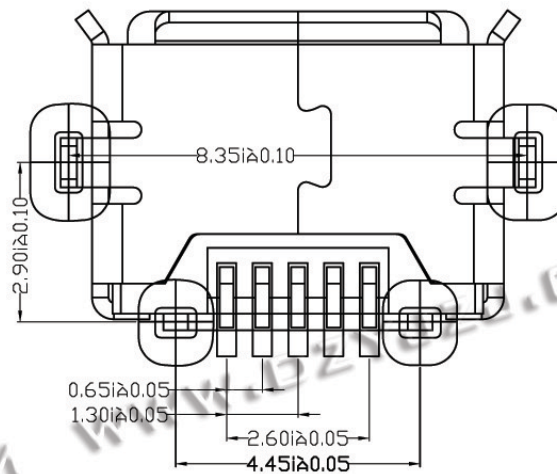
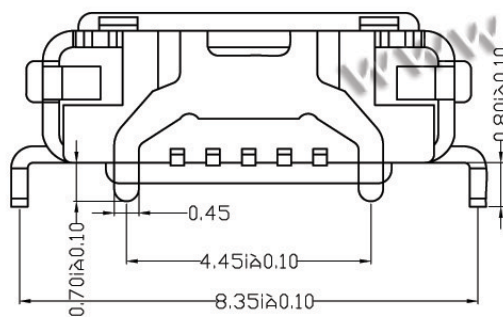
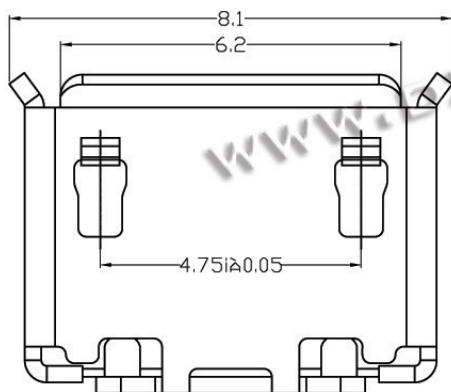
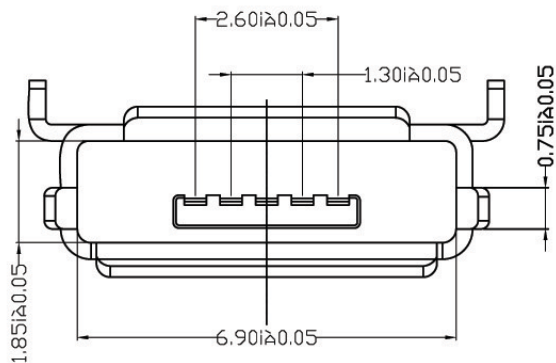


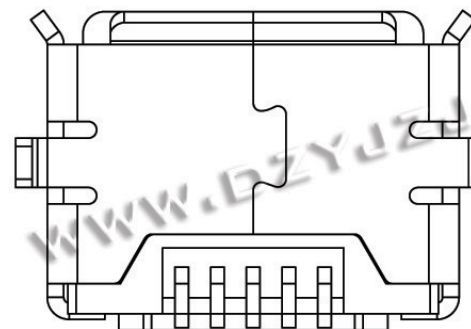

## RECOMMENDED PCB LAYOUT

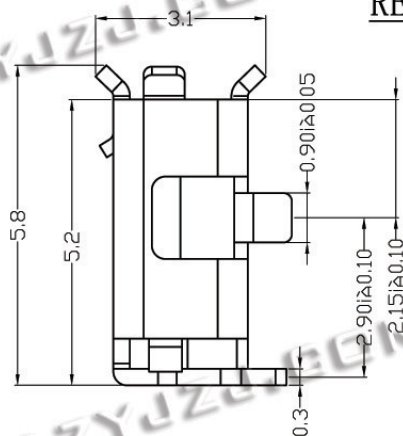

## 备注:

## 1. 产品规格:

- 1-1. 插入力: 35N MAX.
- 1-2. 拔出力: 10N MIN. INITIAL 8-20N AFTER 3000 CYCLES
- 1-3. 额定电流: 1.0A
- 1-4. 额定电压: 30V
- 1-5. 耐久性: 3000 CYCLES MIN.
- 1-6. 耐电压: 100V AC MIN.
- 1-7. 接触阻抗: 30mΩ MAX. INITIAL; 40mΩ MAX AFTER 3000 CYCLES
- 1-8. 绝缘电阻: 100MΩ MIN
- 1-9. 工作温度: -30° TO +80°

## 2. 材质:

- 2.1 胶芯: LCP UL94V-0
- 2.2 端子: C2680R-H, 镍底, 镀金 1μ"
- 2.3 外壳: SUS

## 3. 所用材质须符合RoHS要求

## 4. 重点尺寸标识"▲"符号



深圳市华宇创精密电子有限公司

## TOLERANCE:

X.X ±0.30  
 X.XX ±0.25  
 X.XXX ±0.15  
 X' ±2" X.X' ±0.5'



UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

## DRAWN BY :

陈一鸣

## DATE :

2014-02-23

## PART NAME:

MICRO USB 5P AB型带牛角 8.35/4.45

## CHECKED BY:

马跃

## DATE :

2014-02-23

## PART NO.

HYC106-USBD05-835

## MOLD NO.

## APPROVED BY:

邱国夷

## DATE :

2014-02-23

## DRAW NO:

HYC-USB16061710

## SHEET NO.

1 OF 1