
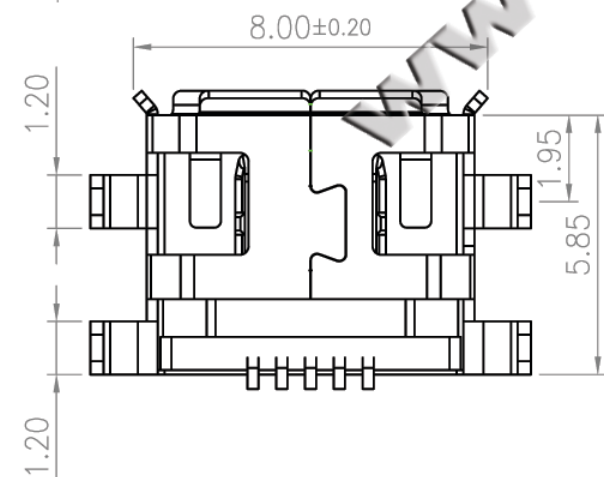
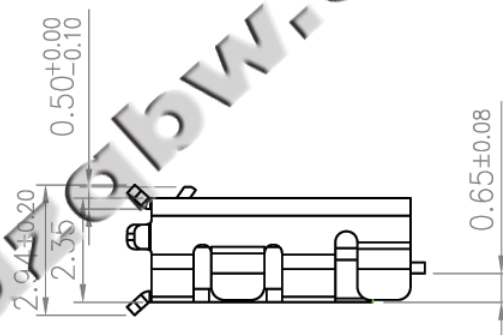
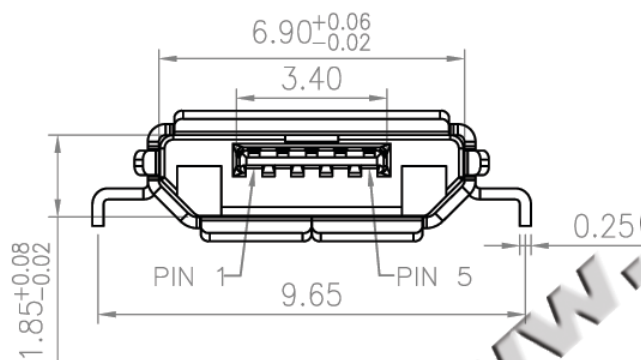
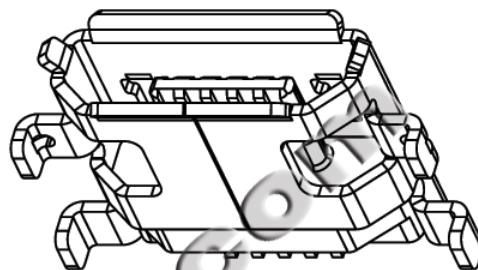


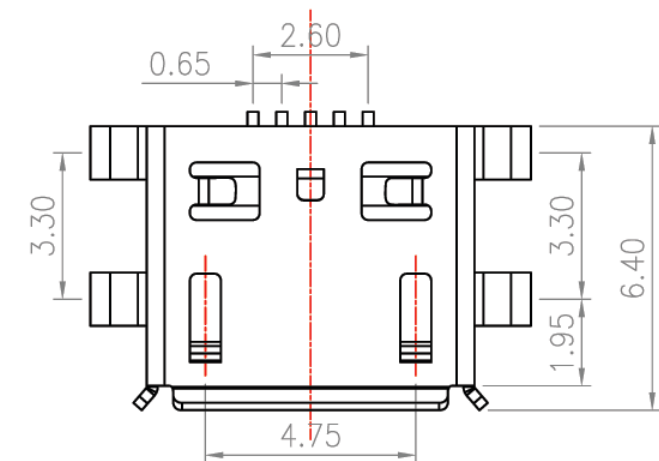

1. MATERIAL:

HOUSING:HIGH-TEMP , COLOR:BLACK, UL94V-0
CONTACT:COPPER ALLOY
SHELL:STAINLESS STEEL

2. PLATING:

CONTACT:FULL GOLD FLASH PLATED OVER NI
SHELL:MATT Tin PLATED OVER NI


3. SPECIFICATION:

3.1. ELECTRICAL CHARACTERISTICS

CURRENT RATING:1.0A
OPERATING:30V
CONTACT RESISTANCE:30mΩ MAX
INSULATION RESISTANCE:1000MΩ MIN
DIELECTRIC WITHSTANDING VOLTAGE:
100V AC FOR 1 MINUTE
TEMPERATURE RANGE:-20° C TO +85° C

3.2. MECHANICAL

ATING CYCLE: 10000 CYCLES MIN
MATING FORCE: 35N MAX
UNMATING FORCE:8N MIN

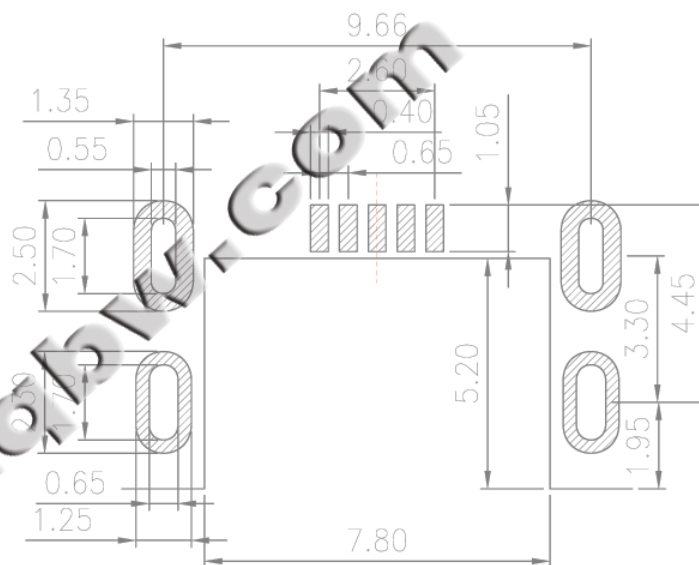

RECOMMENDED PCB LAYOUT(TOP VIEW)
GENERAL TOLERANCES:±0.05



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MICRO USB 四脚DIP 沉板0.7	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC30-USB05-065	MOLD NO.
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HYC-USB13111101	SHEET NO. 1 OF 1