
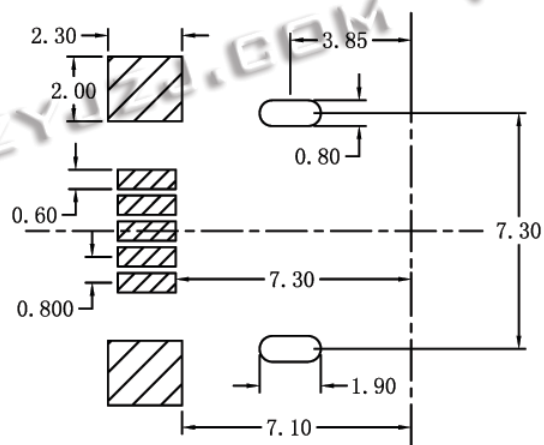
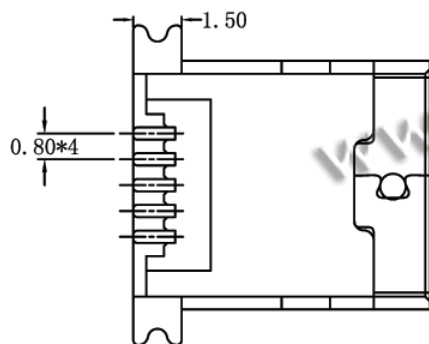
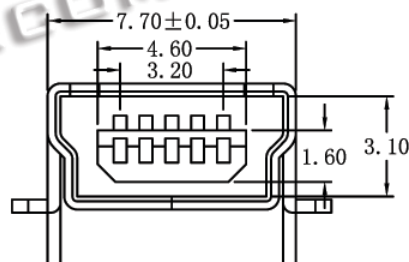
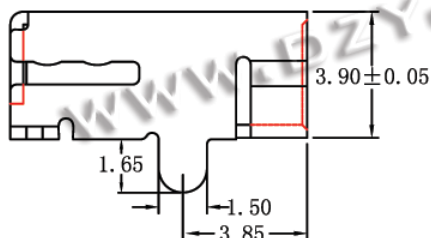


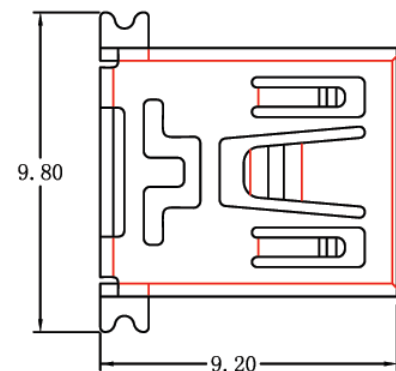

RECOMMENDED PCB LAYOUT

规格说明:Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating
1.0A/contact terminal
2. 额定电压: Voltage Rating
30V DC
3. 接触阻抗: Contact Resistance
50 milliohms MAX
4. 耐电压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
5. 绝缘阻抗: Insulation Resistance:
100MEGA ohms MIN

物理性能:Mechanical:

1. 插拔力: Connector Mate and Unmate Force
Mate force: 3.0kgf (MAX)
Unmate force: 0.7kgf (MIN)
2. 端子保持力: Terminal Retention
0.5kgf (MIN)

原材料:Material:


1. 塑胶: Housing:
High Temperature Thermoplastics,
UL 94V-0 LCP Black
2. 端子: Contact: Copper Alloy C5191/C2680
3. 外壳: Shell: Copper Alloy C2680

电镀:Finish:

1. 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
2. 外壳: Shell:
Nickel Plating



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MINI USB 5P 外壳DIP+SMT 端子SMT	
 UNIT: mm [inch]		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC24-USBC05-920
		APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
				DRAW NO:	HYC-USB15111815
SCALE:1:1	SIZE: A4			SHEET NO.	1 OF 1