




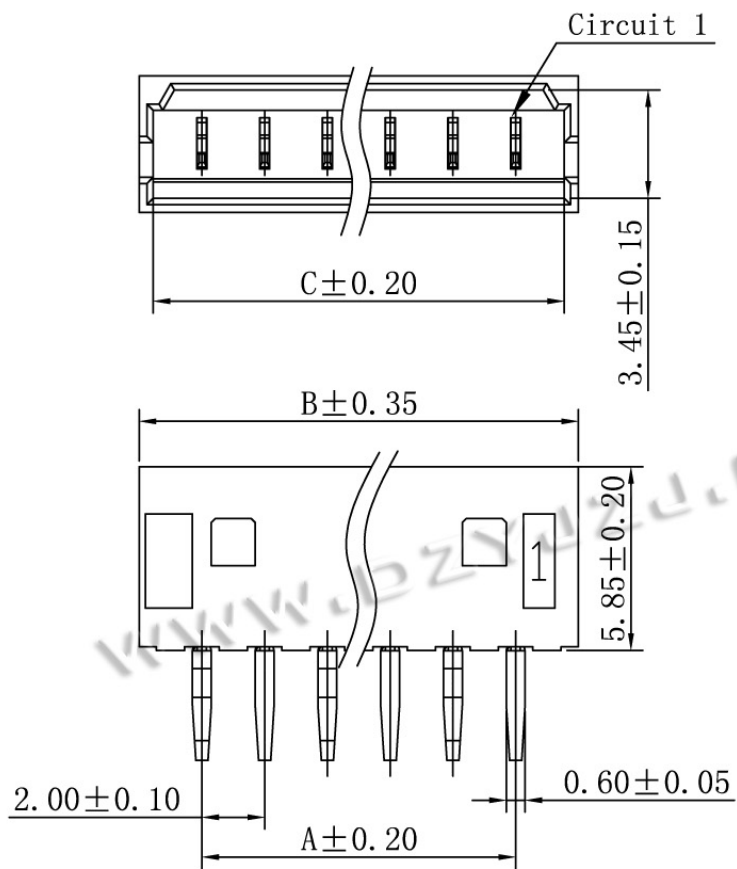

04P-15P



P. C. B LAYOUT

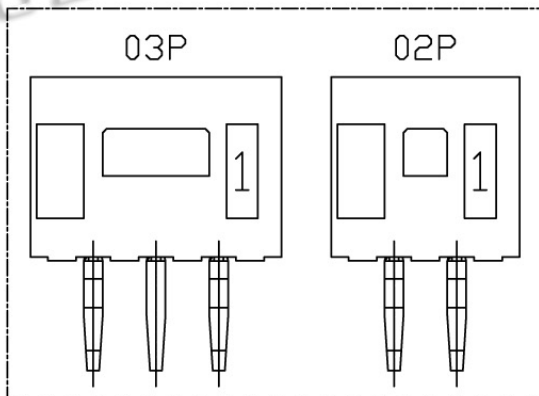

PART NO.	Dimensions (mm)		
	A	B	C
02	2.00	6.00	5.10
03	4.00	8.00	7.10
04	6.00	10.00	9.10
05	8.00	12.00	11.10
06	10.00	14.00	13.10
07	12.00	16.00	15.10
08	14.00	18.00	17.10
09	16.00	20.00	19.10
10	18.00	22.00	21.10
11	20.00	24.00	23.10
12	22.00	26.00	25.10
13	24.00	28.00	27.10
14	26.00	30.00	29.10
15	28.00	32.00	31.10

■ SPECIFICATIONS

- Voltage rating: 125V AC, DC
- Current rating: 2A, AC, DC
- Withstanding Voltage: 800V AC/minute
- Insulation resistance: $1000M\Omega$ min
- Temperature range: $-25^{\circ}C \sim +85^{\circ}C$
- Contact resistance: $10m\Omega$ max

■ WAFER

- Part No. :
- Poles : 02-15P
- Material: Nylon 66 15%GF UL94V-0
- Pin Material: Brass /Tin-plated



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$

UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY :

马跃

DATE :

2014-02-23

APPROVED BY :

柯南

DATE :

2014-02-23

PART NAME:

MOX2.0 直针

PART NO.

HYC91-NA-200

MOLD NO.

DRAW NO:

HYC-181115094

SHEET NO.

1 OF 1