



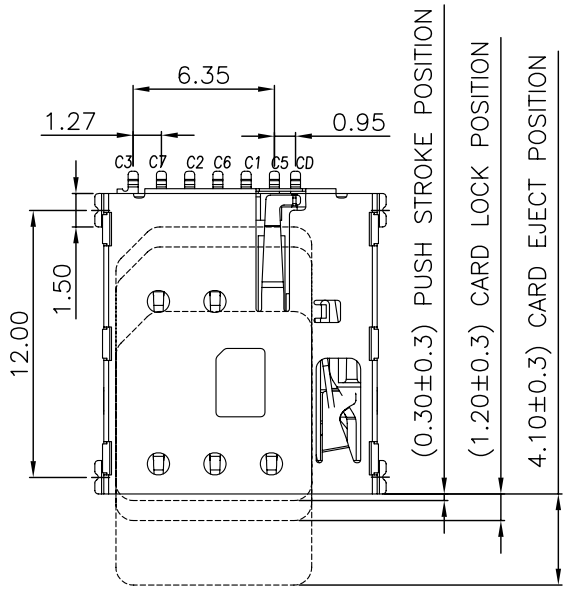


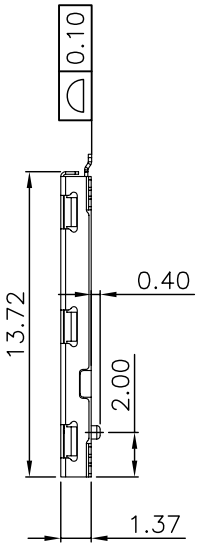


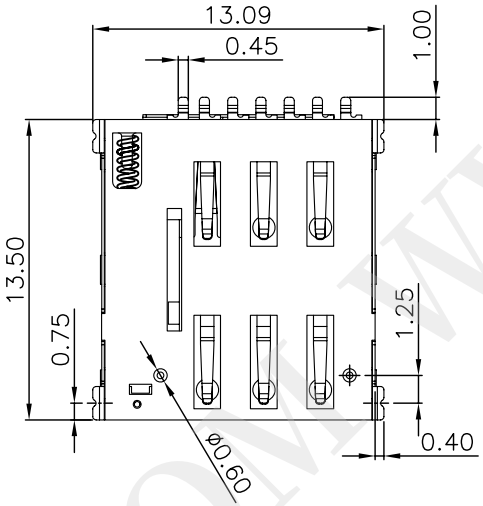

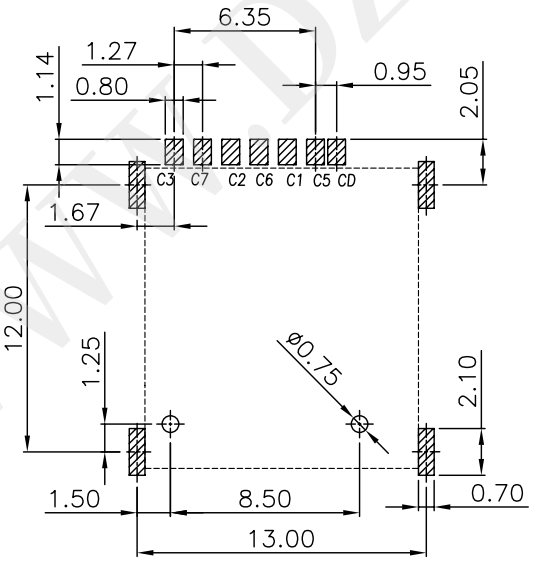

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05



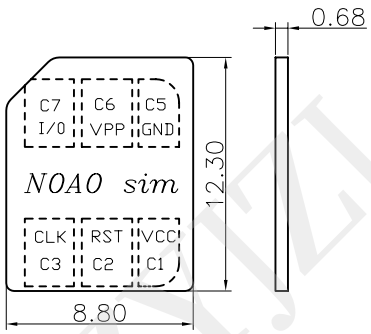


MICRO SIM CARD

NOTES:

1)MATERIAL:
HOUSING:LCP S475 UL 94V-0
CONTACT:C5210R-H
SHELL:SUS304R-H
2)FINISH:
CONTACT:GOLD FLASH PLATED ON CONTACT AREA;
GOLD FLASH PLATED ON SOLDER TAILS,

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

CRICUIT DIAGRAM FOR CARD DETECT SWITCH




深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: NANO SIM PUSH 1.37H 带CD PIN 带柱
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO. HYC185-SIM07-137
UNIT: mm [inch]	APPROVED BY: 邱国夷	DATE: 2014-02-23	MOLD NO. / DRAW NO. HYC-SIM17102716
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM

www.dzyjzj.com Tel:0755-27575531 Fax:0755-27576267


<图一>

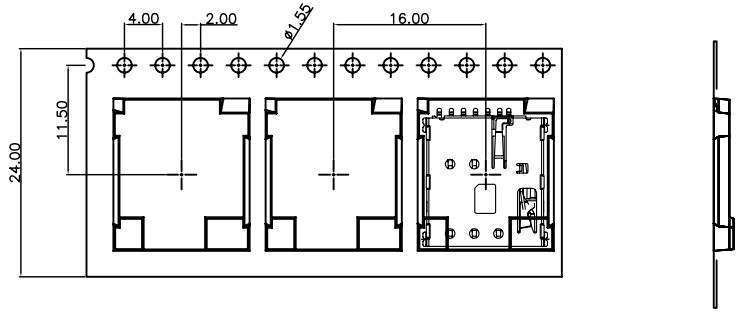


<TABLE 1> PACKAGING QUANTITY


QTY/REEL	REEL/CARTON	QTY/CARTON
1500	10	15000

<图三>

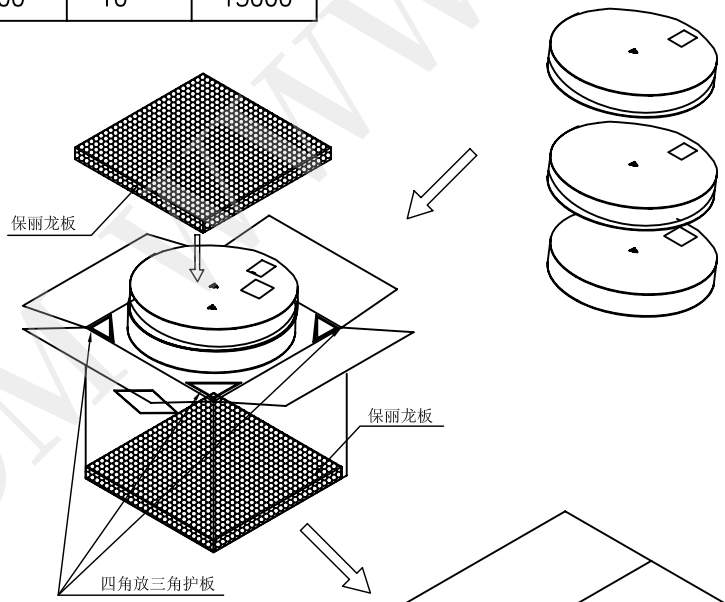

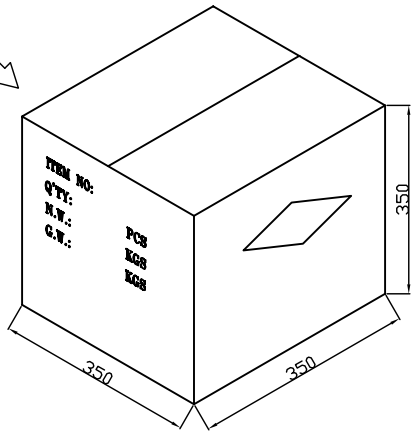

<图二>

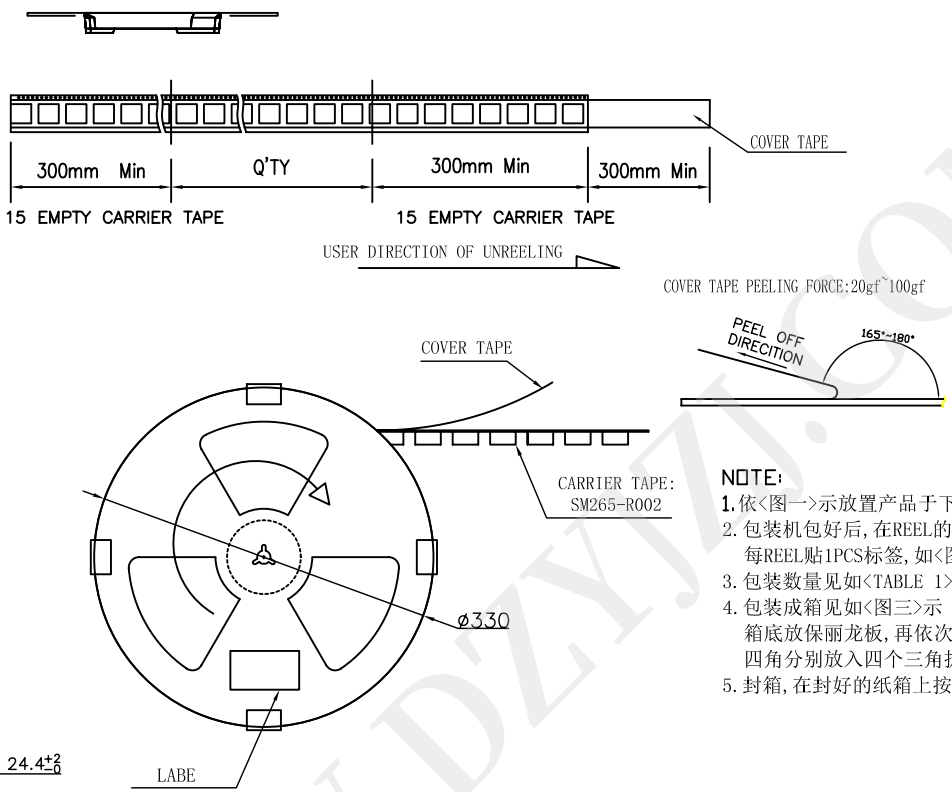

COVER TAPE PEELING FORCE:20gf~100gf

NOTE:

1. 依<图一>示放置产品于下载中, 每穴放置1PCS产品.
2. 包装机包好后, 在REEL的个等分点贴上胶带, 以防止REEL张开, 每REEL贴1PCS标签, 如<图二>示
3. 包装数量见如<TABLE 1>示
4. 包装成箱见如<图三>示
   箱底放保丽龙板, 再依次将指定数量的卷装产品放入箱内, 四角分别放入四个三角护板, 最上层再放上保丽龙板.
5. 封箱, 在封好的纸箱上按客户要求写上料号, 数量等

深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.° ±2° X.X° ±0.5°	DRAWED BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.
UNIT: mm [inch]	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO. / DRAW NO:
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM