



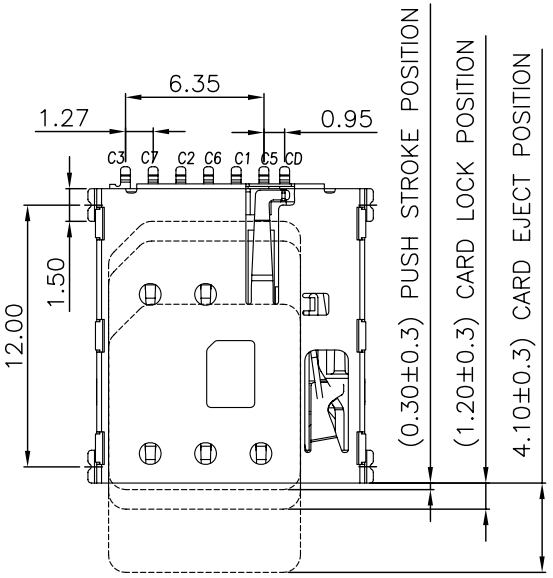


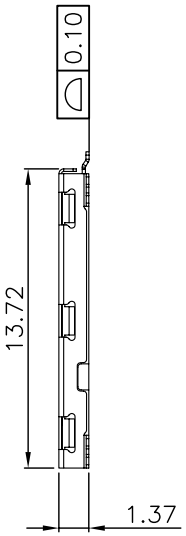


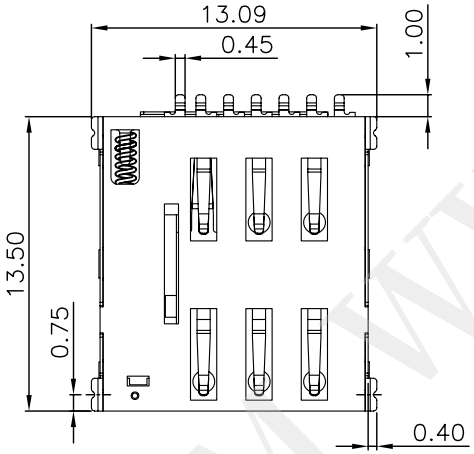

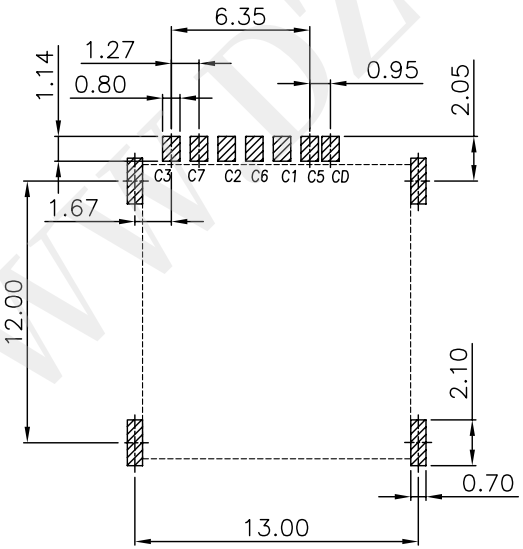

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ±0.05



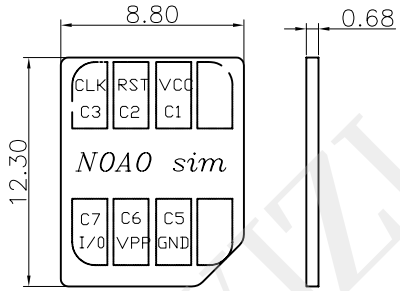


MICRO SIM CARD

SIM pin Assignment	
PIN#	Name
C1	VCC
C2	RST
C3	CLK
C5	GND
C6	VPP
C7	I/O

NOTES:
1)MATERIAL:
HOUSING:HI-TEMP. PLASIC UL 94V-0
CONTACT:COPPER ALLOY
SHELL:STANLESS STEEL
2)FINISH:
CONTACT:GOLD FLASH PLATED ON CONTACT AREA;
GOLD FLASH PLATED ON SOLDER TAILS,

CRICUIT DIAGRAM FOR CARD DETECT SWITCH



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30, X.XX ±0.25, X.XXX ±0.15, X.° ±2°, X.X° ±0.5°	DRAWED BY: 陈一鸣	DATE: 2014-02-23	PART NAME: NANO SIM PUSH 1.37H 带CD PIN 无柱
	CHECKED BY: 马跃	DATE: 2014-02-23	PART NO. HYC186-SIM07-137
UNIT: mm [inch]	APPROVED BY: 邱国夷	DATE: 2014-02-23	MOLD NO.
SCALE:1:1 SIZE: A4			DRAW NO: HYC-SIM17102717
			SHEET NO. 1 OF 1

WWW.DZYJZJ.COM