

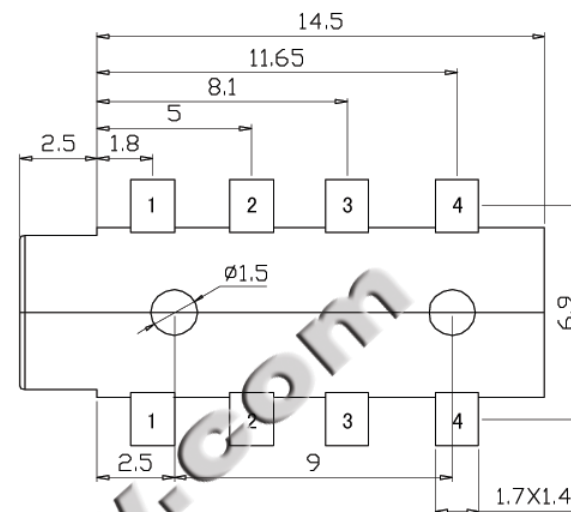
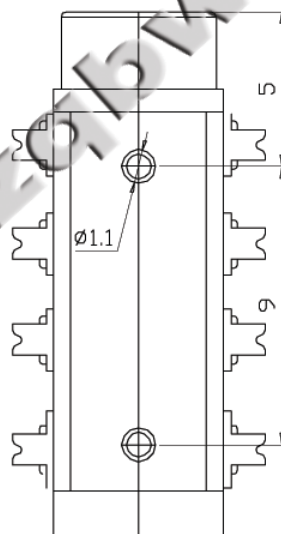
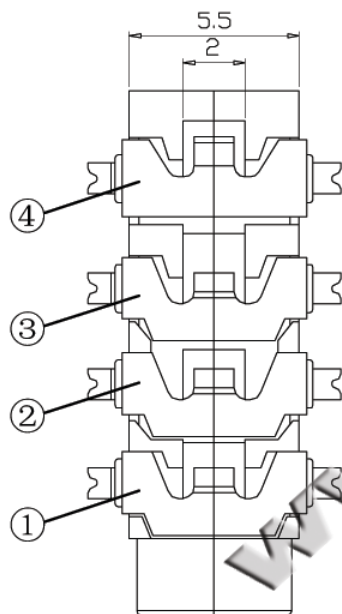
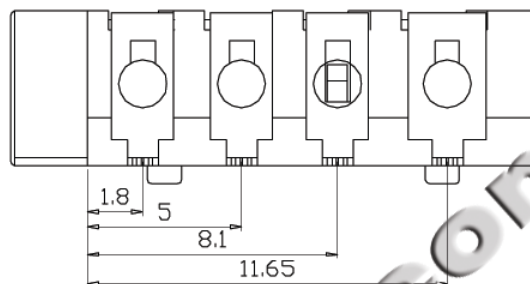


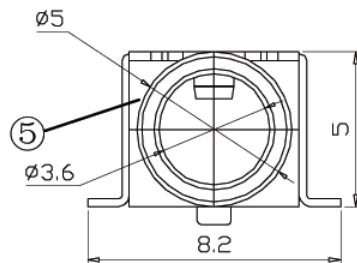

P.C.B LAYOUT TOP VIEW



NOTES :

1.0) RATING :

- 1.1. VOLTAGE : 12 VDC (R.M.S.)
- 1.2. CURRENT : 1 AMPERE MAXIMUM PER CONTACT AT 30° T-RISE
- 1.3. TEMPERATURE : -25° TO +85°

2.0) ELECTRICAL CHARACTERISTIC

- 2.1. CONTACT RESISTANCE : INITIAL 50m MAX. AFTER 100m
- 2.2. INSULATION RESISTANCE : 100 M MIN.
- 2.3. DIELECTIC WITHSTANDING VOLTAGE : 500 VAC AT SEA LEVEL

3.0) MECHANICAL :

- 3.1. DURABILITY ,MINIMUM: MATED 5000 CYCLES WITHOUT DEGRADING ELECTRICAL
- 3.2. INITIAL:MATING FORCE: 300g~2000g.UNMATING FORCE: 200g~2000g
- 3.3. AFTER LIFE TESTING:MATING FORCE: 300g~2000g.UNMATING FORCE: 200g~2000g



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2° X.*' ±0.5°	DRAWN BY : 吴迪	DATE : 2012-02-23	PART NAME: 3.5耳机座PJ313E	
	CHECKED BY: 马跃	DATE : 2012-02-23	PART NO.	HYC-PJ313E-500
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2012-02-23	DRAW NO:	HYC-PJ14020301
			SHEET NO.	1 OF 1