
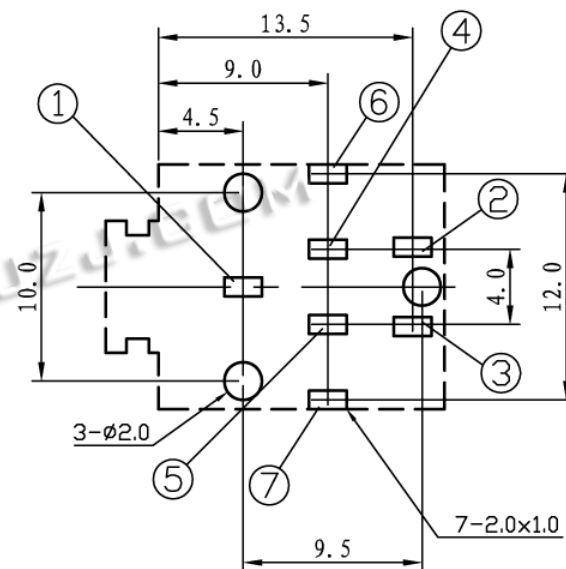
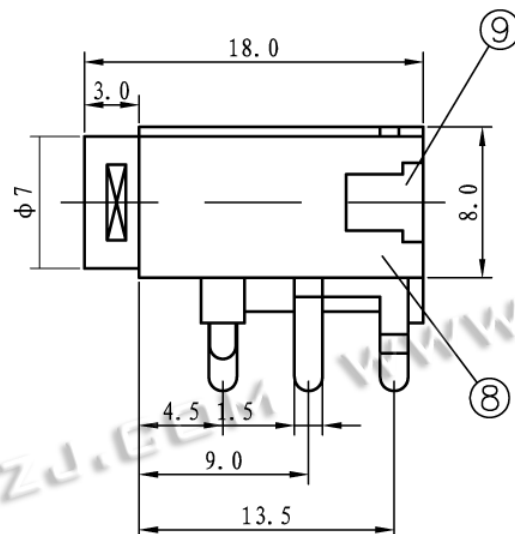


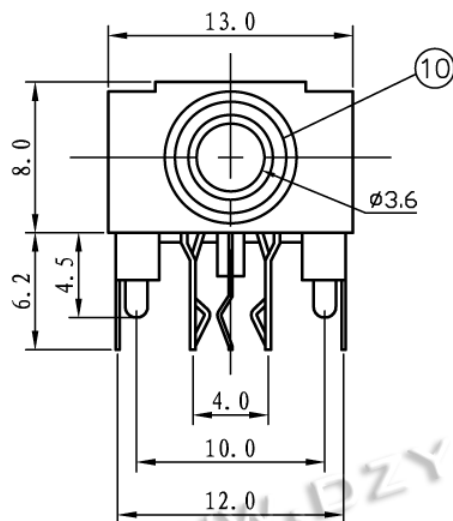

线路板按装尺寸示意图

技术要求

使用条件: -40~55℃

额定负荷: DC 30V 0.5A

接触电阻: < 0.03Ω


绝缘电阻: >100MΩ DC250V

耐压: AC 500V (50Hz)/min

插拔力: 3~20N

机械寿命: 5000次

电路结构示意图



TOLERANCE: UNLESS OTHERWISE SPECIFIED

UNOER 1.5 ± 0.05 | 1.5 ~ 10 ± 0.1 | OVER 10 ± 0.2

10	XL8.210.002	轴套	1PCS	H59-1黄铜棒	电镀: 镍
9	XL7.852.002	盖板	1PCS	POM (白色)	
8	XL7.810.002	底座	1PCS	PBT (黑色)	
7	XL8.044.001	开关固定脚	1PCS	H62 黄铜 t=0.30	电镀: 银
6	XL8.044.001	开关接触脚	1PCS	磷铜 t=0.30	电镀: 银
5	XL8.044.001	开关活动弹片	1PCS	磷铜 t=0.30	电镀: 银
4	XL8.044.001	开关固定脚	1PCS	H62 黄铜 t=0.30	电镀: 银
3	XL7.730.002	声道接触脚	1PCS	磷铜 t=0.30	电镀: 银
2	XL7.730.001	声道接触脚	1PCS	磷铜 t=0.30	电镀: 银
1	XL7.740.001	接地焊脚	1PCS	磷铜 t=0.20	电镀: 银
序号	零件图号或代号	名称	数量	材料	备注



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PJ-315A-7P
UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-PJ315A-130
	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-PJ16031411
			SHEET NO. 1 OF 1