
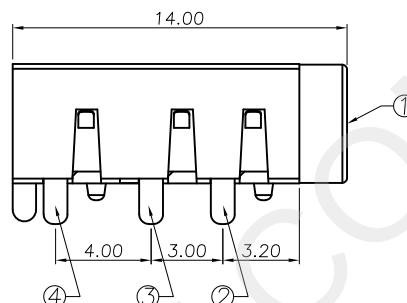

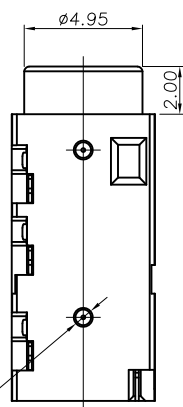
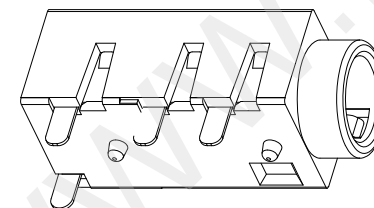
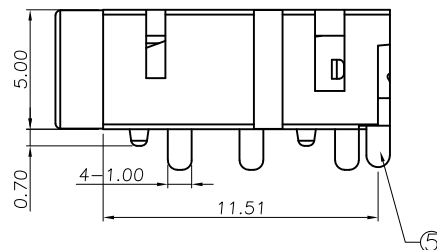




NOTES:

1. MATERIAL: SEE "TABLE 1";

2. FINISH: SEE "TABLE 1";

3. ELECTRICAL :

3-1.CONTACT CURRENT RATING :DC 30V 0.5A

3-2.INSULATION RESISTANCE :
100 MEGAOHMS MIN.3-3.DIELECTRIC WITHSTANDING VOLTAGE :
100VAC MIN.


4.MECHANICAL CHARACTERISTICS :

4-1. MATING FORCE: 3~20N.;

4-2. UNMATING FORCE: 3~20N(INITIAL),2~20N(AFTER 5000 CYCLES);

4-3.DURABILITY : 5,000 MATING CYCLES.

4-4.OPERATING TEMPERATURE :-30°C TO +70°C

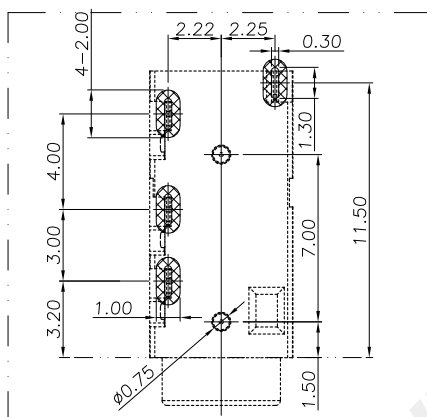RECOMMENDED P.C.B
TOP VIEW

CIRCUIT DIAGRAM

TABLE 1:

⑤	弹片端子	1	黄铜	镀亮锡	T=0.15mm
④	弹片端子	1	黄铜	镀亮锡	T=0.15mm
③	弹片端子	1	黄铜	镀亮锡	T=0.15mm
②	弹片端子	1	黄铜	镀亮锡	T=0.15mm
①	主体胶芯	1	PPA	黑色	
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PJ-320A	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC02-PJ320A-500
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-2511271109
SCALE:1:1	SIZE: A4		SHEET NO.	1 OF 1