
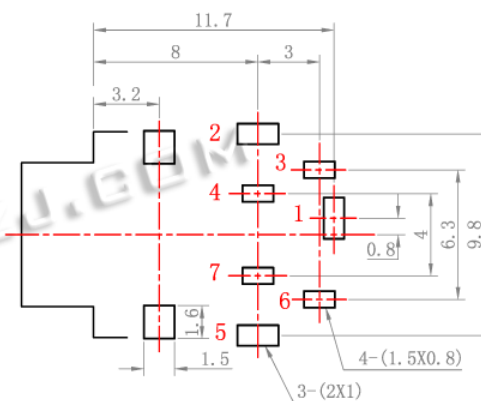
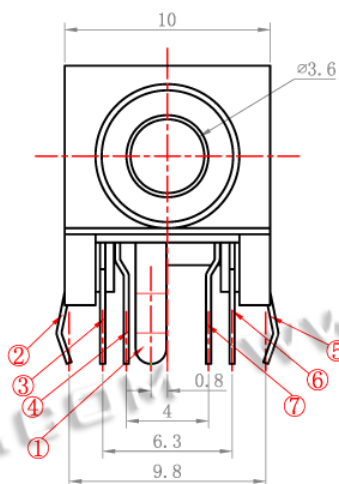


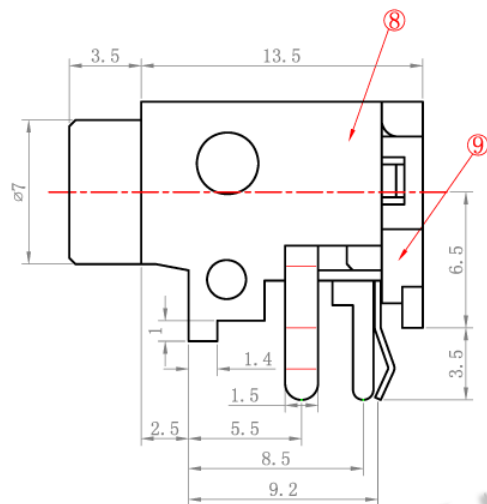

P.C.B LAYOUT

主要技术性能

1. 额定电负荷：30V 0.5A;
2. 接触电阻： $\leq 0.03\Omega$;
3. 绝缘电阻： $\geq 100M\Omega$;
4. 耐压：AC500V (50Hz)min;
5. 插拔力：5-25N;
6. 寿命：5,000次。


主要技术要求

1. 未注线性公差：

0.0-10.0mm	$\pm 0.10mm$
10.0-20.0mm	$\pm 0.15mm$
20.0-50.0mm	$\pm 0.20mm$
2. 外观应良好，无锈蚀、裂痕、电镀不良等现象。

后盖

SCHEMATIC



9	后盖⑨	1	PA UL94V-0	黑	耐温260℃
8	基座⑧	1	PBT-4815 UL94V-0	黑	耐温240℃
7	绝缘内置	1	PA UL94V-0	透明	耐温215℃
6	开关静片③⑥	2	黄铜 (H62)	银	T=0.30mm
5	接触弹片①	1	磷铜 (QSn6.5-0.1)	银	T=0.25mm
4	接触弹片④	1	磷铜 (QSn6.5-0.1)	银	T=0.25mm
3	开关弹片⑤	1	磷铜 (QSn6.5-0.1)	银	T=0.30mm
2	开关弹片②	1	磷铜 (QSn6.5-0.1)	银	T=0.30mm
1	接触弹片⑦	1	磷铜 (QSn6.5-0.1)	银	T=0.30mm
序号	名称	数量	材料	涂镀/color	备注



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$
UNIT: mm [inch]
SCALE: 1:1 SIZE: A4

DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PJ-339-7P
CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC-PJ339-100
APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.
		DRAW NO: HYC-PJ16031410
		SHEET NO. 1 OF 1