

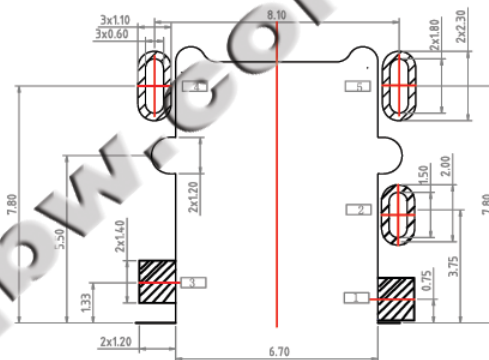
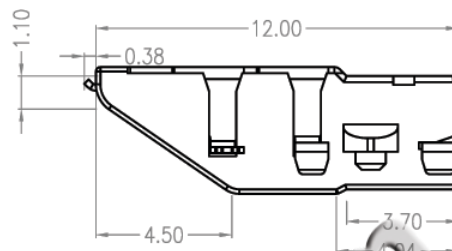
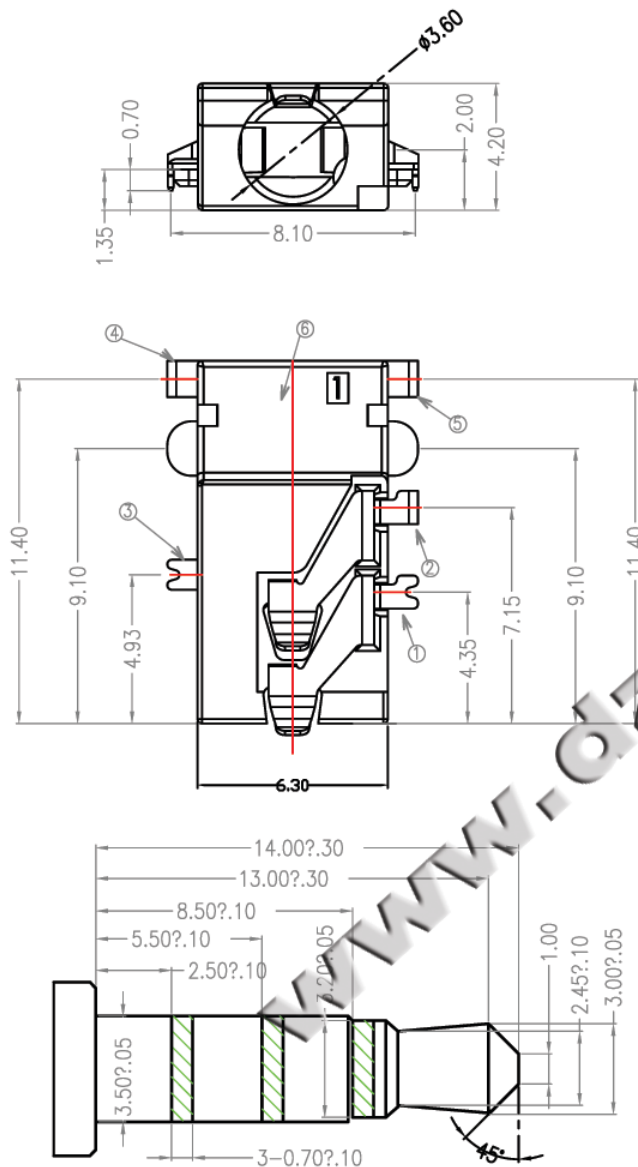




PCB LAYOUT TOP VIEW
TOLERANCE:±0.05

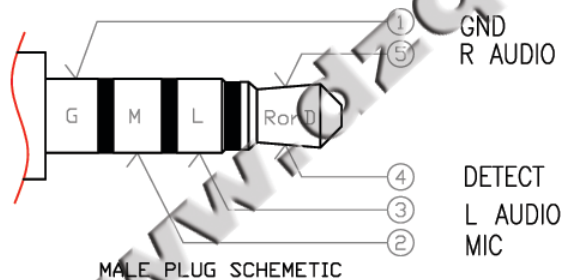

NOTES:

- 1)MATERIAL:
HOUSING: THERMOPLASTIC,UL 94V-0, COLOR:BLACK
CONTACT: COPPER ALLOY
- 2)FINISH
CONTACT: GOLD FLASH
- 3)PRODUCT SPECIFICATIONS:
3-1 WITHSTANDING:500V AC /MINUTE
3-2 CONTACT RESISTANCE:30 milliohm(INITIAL) Max.
3-3 INSULATION RESISTANCE:100MEGOHM Min
3-4 INSERTION FORCE:2.22Kg Max (INITIAL)
3-5 WITHDRAWAL FORCE:0.22Kg Min (INITIAL)
3-6 DURABILITY:5000 CYCLES

ITEM	PART NAME	Q'TY	MATERIAL	DESCRIPTION	REMARK
⑦					Black
⑥	HOUSING	1	PPA		
⑤	CONTACT E	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
④	CONTACT D	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
③	CONTACT C	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
②	CONTACT B	1	PHOSPHOR BRONZE 0.20T	Gold Flash	
①	CONTACT A	1	PHOSPHOR BRONZE 0.20T	Gold Flash	



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 吴迪	DATE : 2012-02-23	PART NAME: 3.5耳机座PJ3028
UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY: 马跃	DATE : 2012-02-23	PART NO. HYC-PJ3028-135
	APPROVED BY: 邱国夷	DATE : 2012-02-23	MOLD NO. DRAW NO: HYC-PJ13111008
			SHEET NO. 1 OF 1