


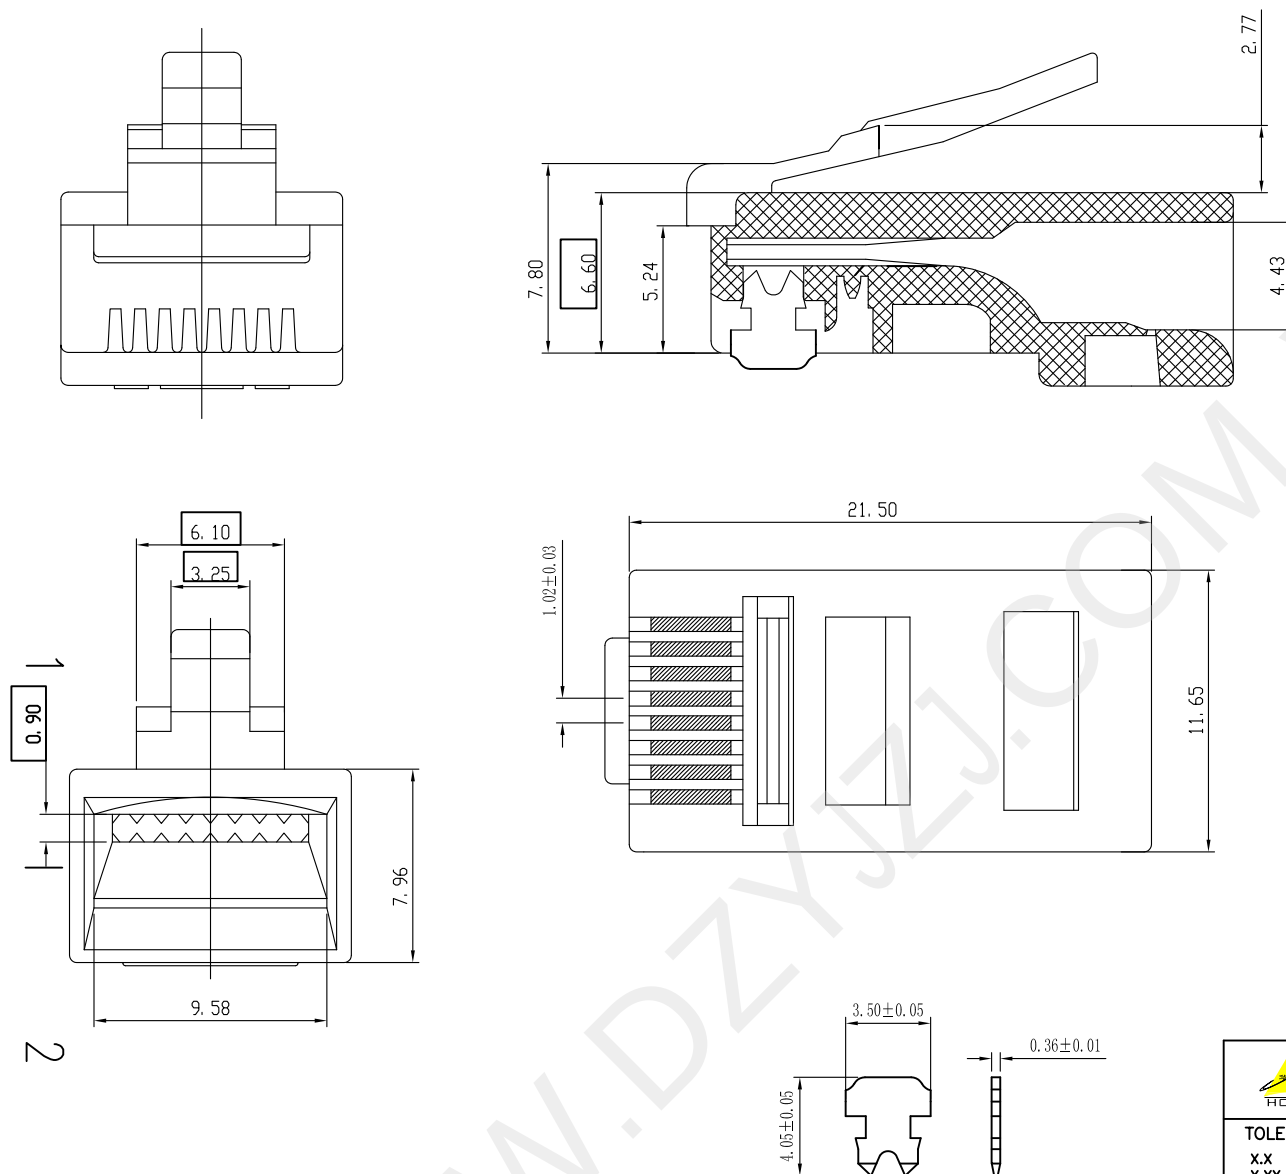

For standard Wire

8p8c plug (圆孔) 无台阶

特征:

1、电气特性:

A: 250伏特AC最大2安培介值耐电压伏特数

B: 500伏特AC耐压比

C: 500万欧姆绝缘抗阻

D: 最大35万欧姆终端抗阻

2、机械特性:

A: 拉力测试---电缆至插座张力强度至少20磅 (89N)

B: 耐力测试---插拔测试500次

FEATURES:

1 Electrical Test:

A. 250V AC max at 2 amps.

B. Dielectric with standing 500volts AC.

C. Insulation Resistance: 500 megaohms.

D. Termination Resistance: 35megaohms.

2 Mechanical:

A. Cable-to-Plug tensile strength-20LBs (89N) min.

B. Durability: 500 mating cycles.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: RJ45 8P8C 水晶头	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC02-RJ8P8C-COB	MOLD NO.
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HYC-RJ17112107	SHEET NO. 1 OF 1