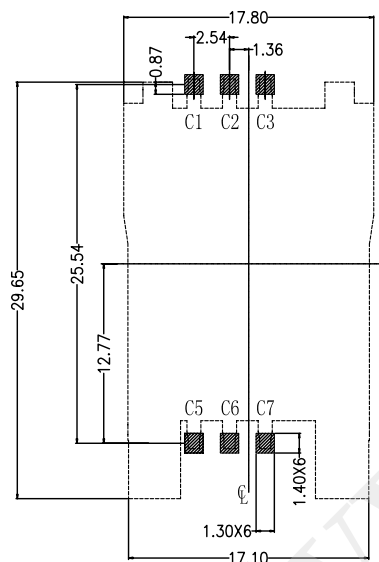
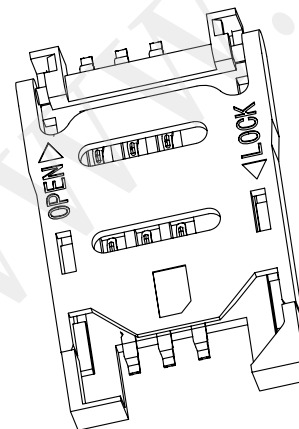
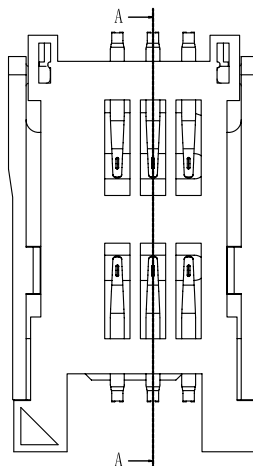

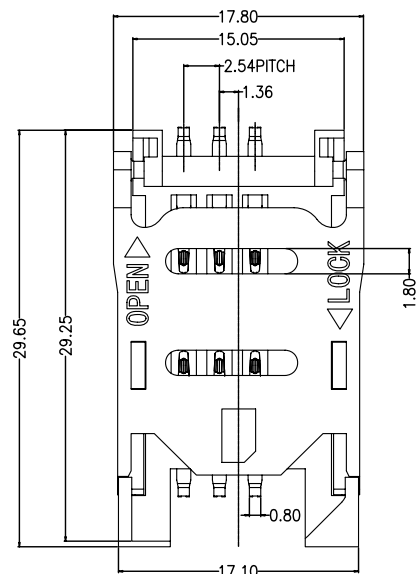


RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05

REMARKS:

附注:

1. MATERIAL:

材料:

1.1 HOUSING: THERMOPLASTIC

本体: 热塑性塑胶料

COLOR: WHITE.

颜色: 白色

1.2 COVER: THERMOPLASTIC

盖子: 热塑性塑胶料

COLOR: WHITE

颜色: 白色

1.2 CONTACT: COPPER ALLOY

接触件: 铜合金

2. PLATING:

表面处理:

2.1 CONTACT:

PLATED GOLD OVER NICKEL AND 50u" MIN.

接触件: 镀镍底50u" 以上, 在镍表面镀金

Technical Speciality

技术特性

Rated Voltage: 50V AC/DC Max

额定电压: 50V AC/DC Max

Current Rating: 1.0A Max

额定电流: 1.0A Max

Insulation Resistance: 1000MΩ Min

绝缘电阻: 1000MΩ Min

Contact Resistance: 100mΩ Max

接触电阻: 100mΩ Max

Withstand Voltage:

耐压: 500V AC/minute

Operating Temperature: -25℃ ~ +85℃

工作温度: -40℃ ~ +85℃



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5'



UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

SIM 6P 全塑掀盖 无柱

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NO.

HVC268-SIM06-280

MOLD NO.

DRAW NO:

HVC-SIM2011041520

SHEET NO.

1 OF 1