

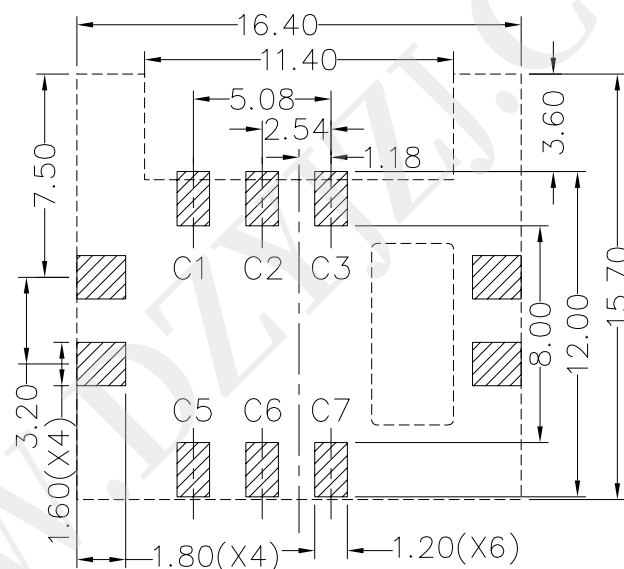
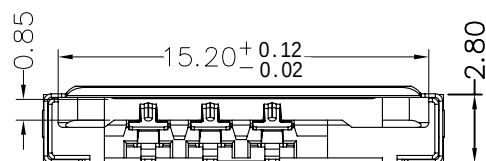
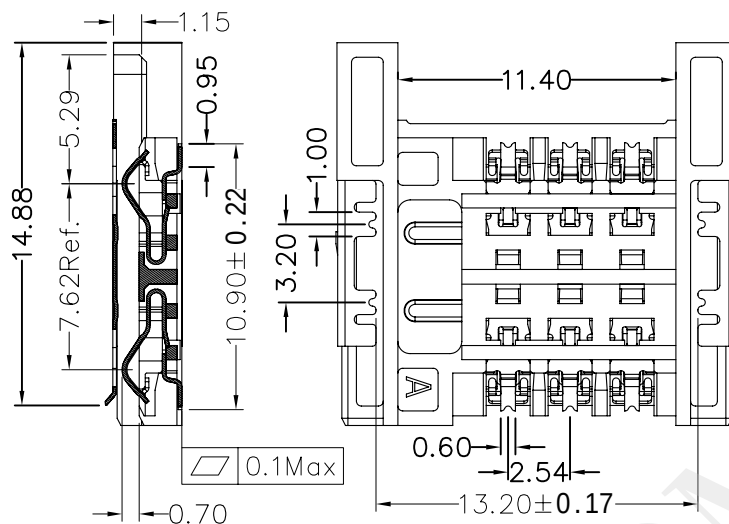


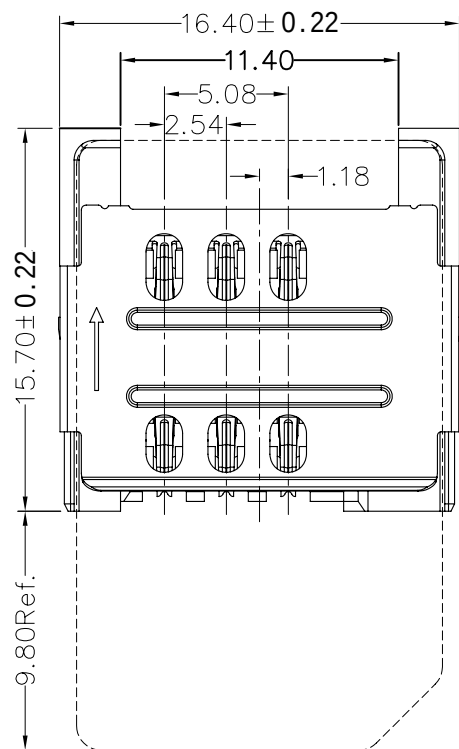

RECOMMENDED P.C.B LAYOUT
COMPONENT SIDE(TOLERANCE ± 0.02)

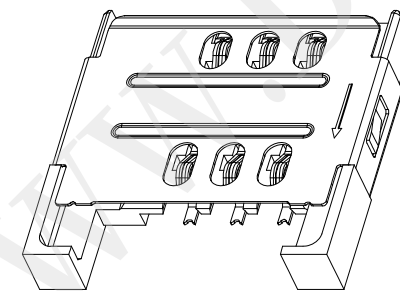

TECHNICAL CHARACTERISTICS

1.General Characteristics

Dimensions: 15.70LX16.40WX2.80H mm

Weight: Approx 0.53±0.2g

Durability: 5,000 cycles min.

2.Electrical Characteristics

Contact resistance: 50mΩ typical, 100mΩ max

Insulation resistance: >1000MΩ/500V DC

3.Solderability

IR reflow: 260°C, 10sec. Max

Manual soldering: 370°C, 3sec. Max

4.Environmental Characteristics

Operating temperature: -40°C~+85°C

Operating humidity: 10%~+95%RH

ITEM	PART NAME	Q'TY	MATERIAL	FINISH
1	HOUSING	1	Hi-temp Thermoplastic	Black UL94V-0
2	DATA CONTACT	6	Copper Alloy	Contact area: Gold plated
3	SHELL	1	Stainless Steel	SMT area: Gold plated



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2° X.X' ±0.5°

UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

SIM 6P 连桥带档 2.8H

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HVC323-SIM06-280

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HVC-2208171708

SHEET NO.

1 OF 1