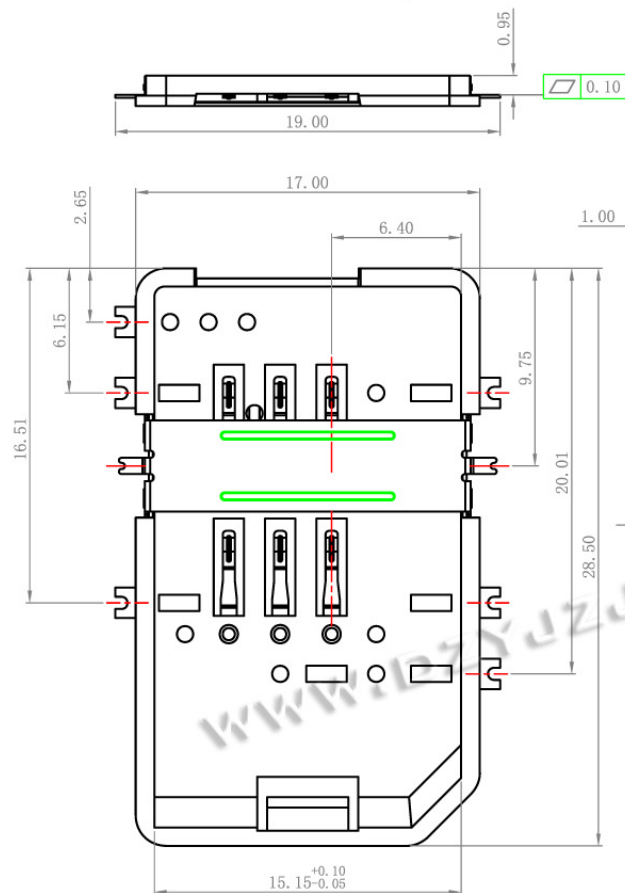
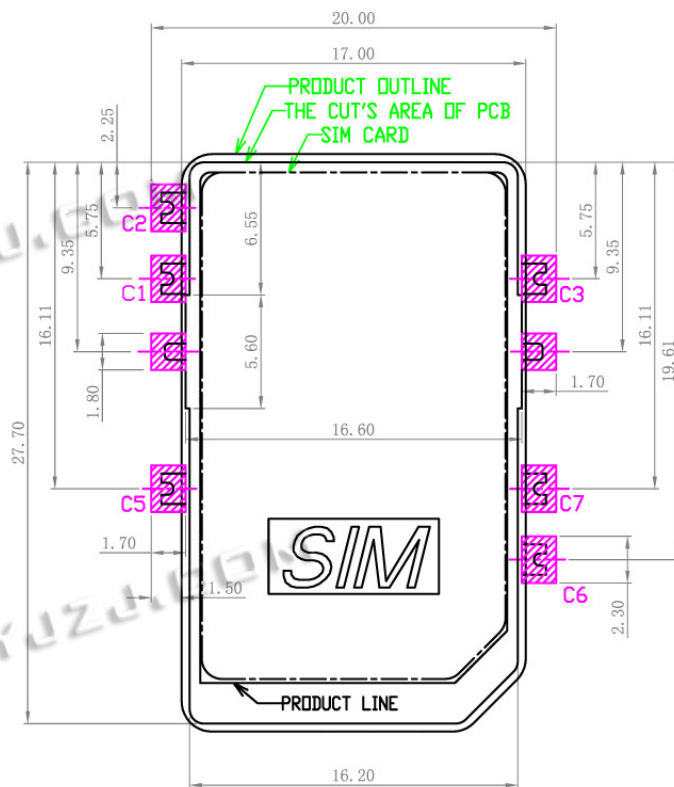
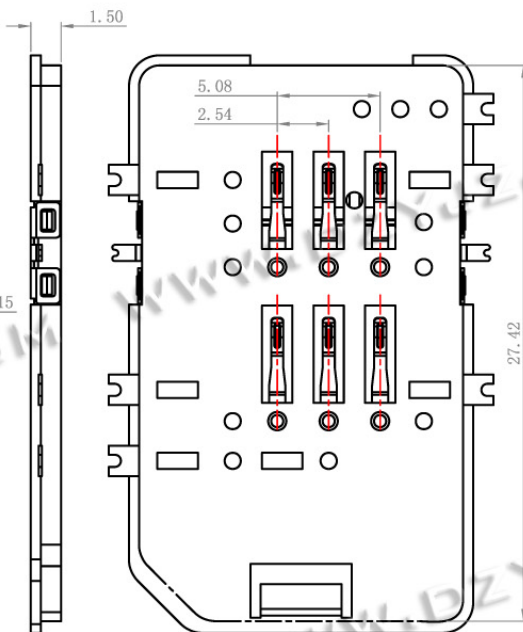
REF. SIM CARD PLUG
SCALE 1:2

TABLE B:

PIN NO.	PIN NAME
C1	VCC
C2	RST
C3	CLK
C4	Reserved
C5	GND
C6	VPP
C7	I/O
C8	Reserved




NOTES:

- 1.0 RATING.
 1.1 VOLTAGE:12 VAC (rms)
 1.2 CURRENT: 1 AMPERES MAX. PER CONTACT
 1.3 OPERATION TEMPERATURE RANGE:-25°C~+70°C
 2.0 ELECTRIC CHARACTERISTIC:
 2.1 INSULATION RESISTANCE: 1000MΩ
 2.2 DIELECTRIC WITHSTANDING
 VOLTAGE:500V AC FOR 1 MINUTE
 3.0 OPERATION LIFE:10000 CYCLES
 4.0 MATERIAL/FINISH SEE TABLE A
 4.1 SIM CARD SEE TABLE B

RECOMMEND P.C.B LAYOUT
TOLERANCE ±0.05

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SIM CARD 1.5H 沉板
CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC121-SIM06-150	MOLD NO.
APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HYC-SIM16062911	SHEET NO. 1 OF 1

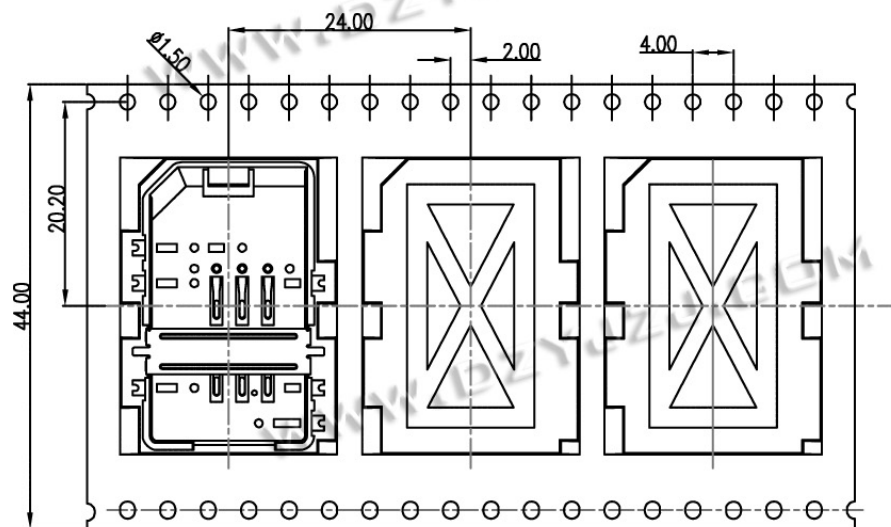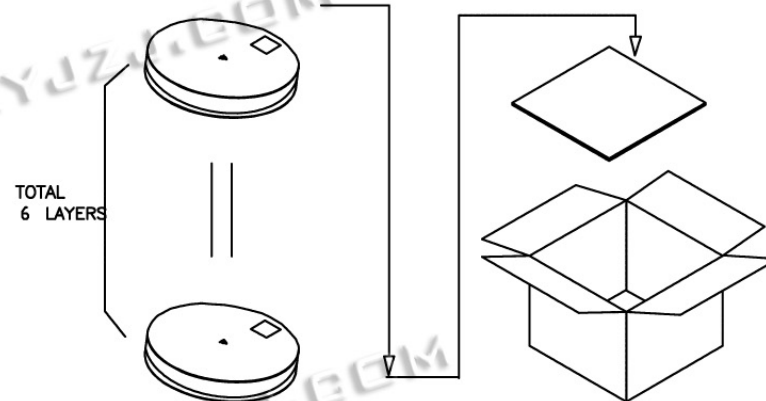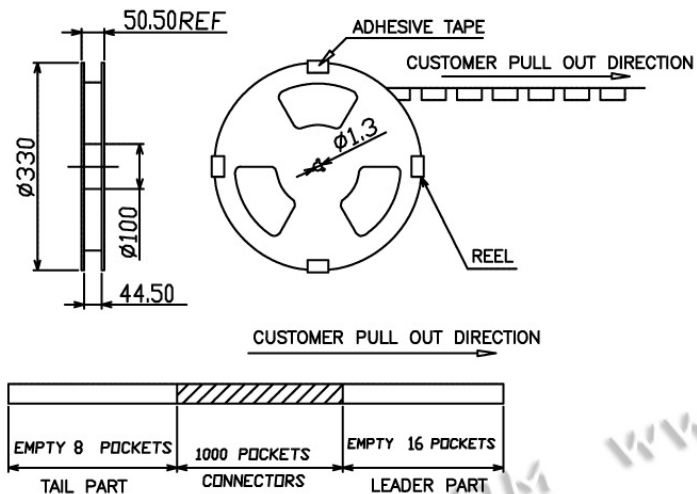

NOTES:

- 1.PRIMARY PACKING:1000PCS/REEL;
- 2.SECONDARY PACKING: 6 REELS/CARTON(6000 PCS/CARTON);



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1