
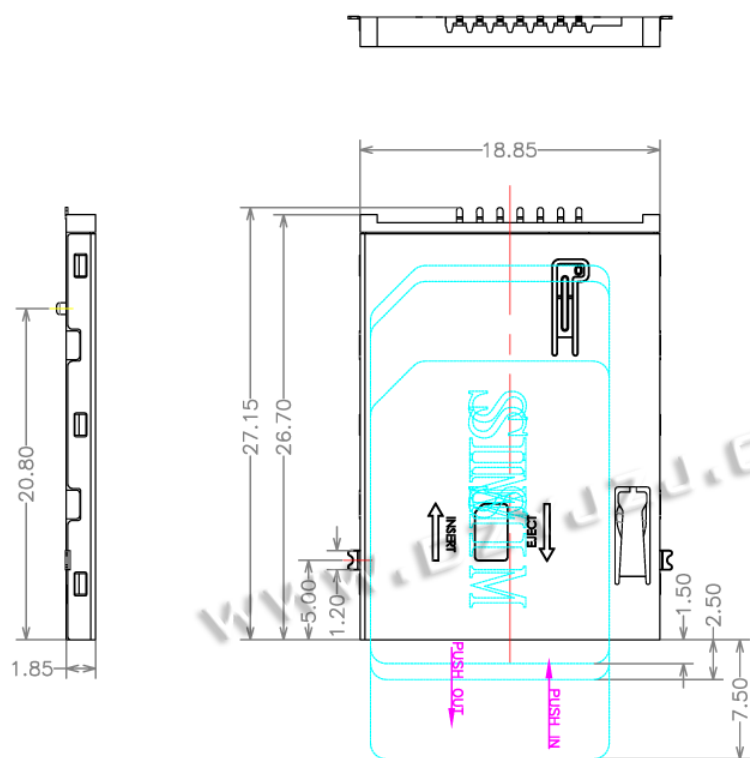
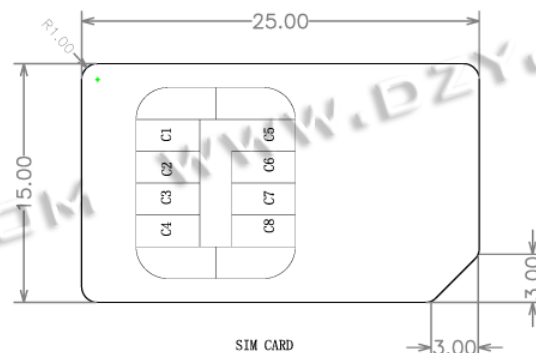


Pin No.	Pin assignment
C1	Vcc
C2	RST
C3	CLK
C4	RESERVED
C5	GND
C6	VPP
C7	IO
C8	RESERVED

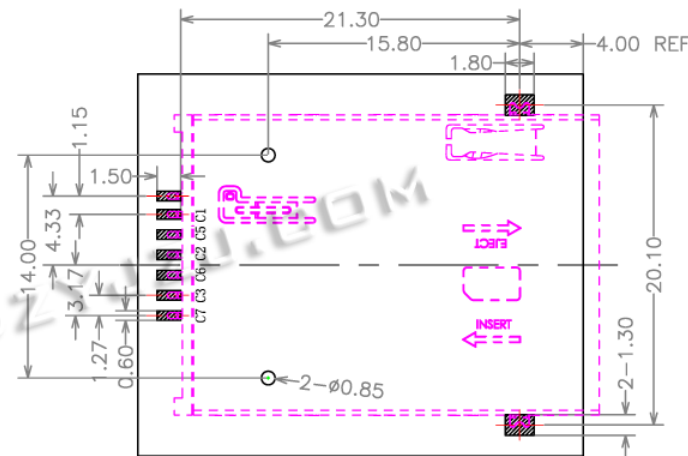

注解:

1. 机械性能要求:

- 1.1 插入力最大 4.0kgf。
- 1.2 拔出力最小 0.1kgf。
- 1.3 耐久插拔 5000次循环

2. 电气性能要求:

- 2.1 额定电压 2V~3.6V
- 2.2 耐压交流电压最小200伏特, 最少1分钟。
- 2.3 绝缘电阻在直流电压500伏特时最小 100M 欧姆。
- 2.4 接触电阻最大100毫欧。

3. 环境性能要求:

- 3.1 使用环境-20摄氏度~85摄氏度
- 3.2 部件耐热焊接温度符合230摄氏度 30~60秒, 260摄氏度10秒要求。

4. 部件符合RHOS 2005/95/EC.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SIM PUSH 6+1
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC93-SIM07-185
	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HYC-SIM16030109
SCALE:1:1 SIZE: A4			SHEET NO. 1 OF 1