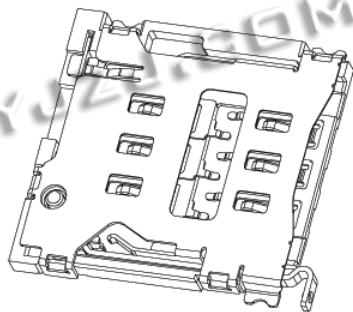
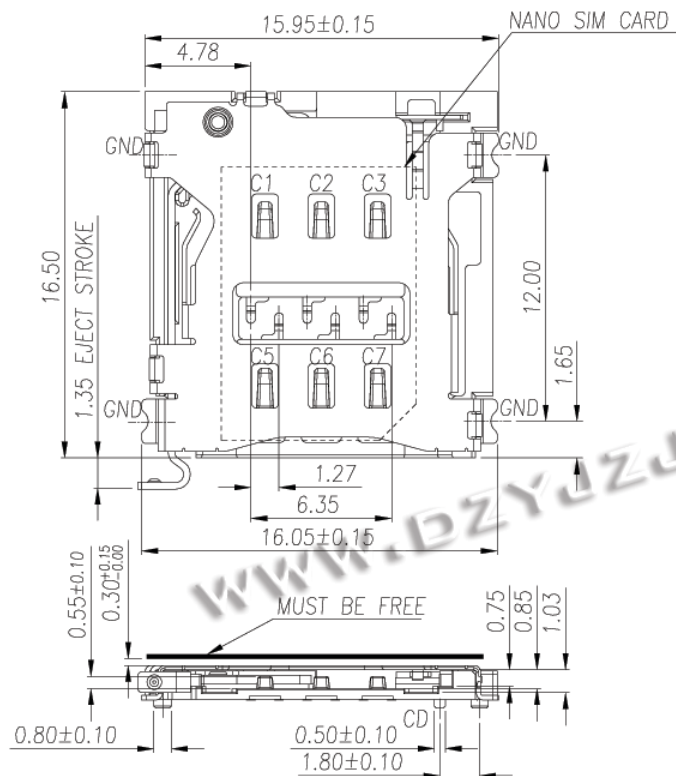


NOTES:

1) MATERIAL:

- 1-1 HOUSING:THERMOPLASTIC,UL 94V-0;COLOR:BLACK
- 1-2 SHIELDED:STAINLESS STEEL
- 1-3 CONTACT:COPPER ALLOY
- 1-4 SWITCH PIN:COPPER ALLOY

2) FINISH:

- 2-1 CONTACT: Au PLATING ON CONTACT AREA
(SEE P/N DESCRIPTION)
50u" MIN NICKEL UNDERPLATING OVER ALL
1u" MIN AU PLATING ON SOLD AREA,
- 2-2 SHIELDED:1u" MIN Au PLATING ON SECURED AREA



3) PRODUCT SPECIFICATIONS:

- 3-1 VOLTAGE RATING: 50V
- 3-2 WITHSTANDING VOLTAGE: AC250V R.M.S
- 3-3 CURRENT RATING: 0.5A
- 3-4 INSULATION RESISTANCE: 1000MEG.OHM MIN AT DC 250V
- 3-5 CONTACT RESISTANCE: 100 MILL.OHM MAX
- 3-6 OPERATION TEMPERATURE: -20° TO +85°




深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: NANO SIM卡座1.55H 带DIP检测PIN
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC69-SIM06-155
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO. /
			DRAW NO: HYC-SIM15091314
			SHEET NO. 1 OF 1

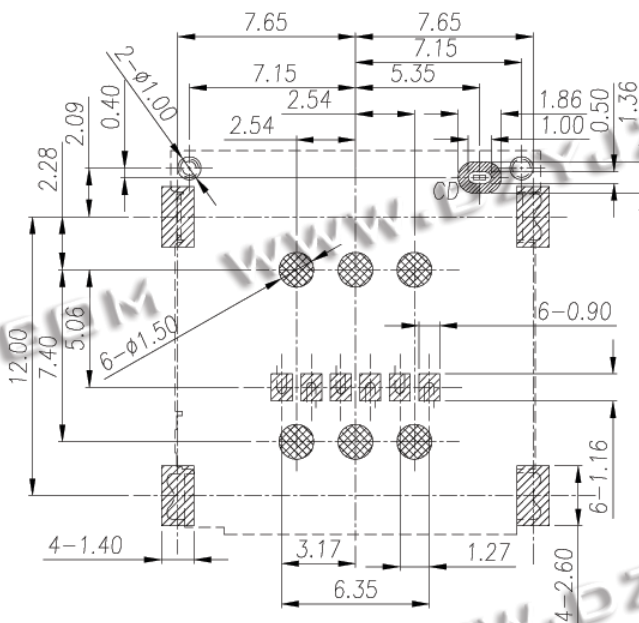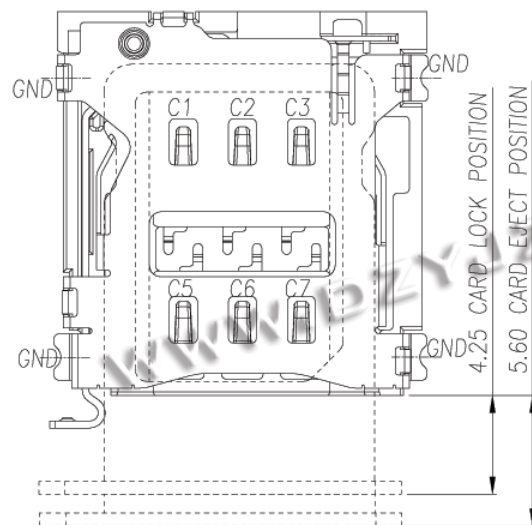


C1:VCC
C2:RST
C3:CLK
C5:GND
C6:VPP
C7:I/O

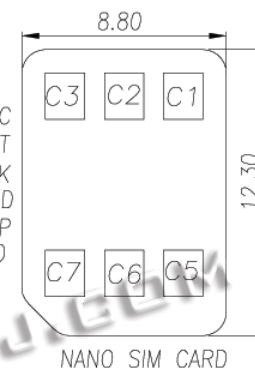

■ CIRCUIT TRACE KEEP OUT AREA
■ SMT SOLDER AREA
THERE SHOULD NOT BE ANY CIRCUITRIES
IN THE LAYOUT SPACE OF THE PRODUCTS.
RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

CIRCUIT DIAGRAM FOR CARD DETECT SWITCH

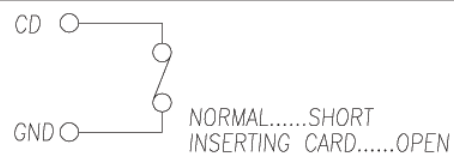

深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X." ± 2 " X.X" ± 0.5 "	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: NANO SIM卡座1.55H 带DIP检测PIN
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC69-SIM06-155
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HYC-SIM15091314
			SHEET NO. 1 OF 1