


NOTE:
1.MARKED(1~9) SHOULD BE MEASURED BY FAI

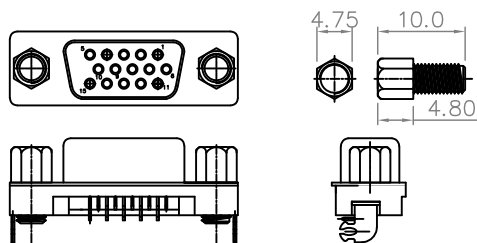


| | |
|--------------------|-----|
| HYC04-SDR15B-150 | 无螺丝 |
| HYC04-SDR15B-150-F | 附螺丝 |
| HYC04-SDR15B-150-S | 锁螺丝 |

螺丝规格可由订单决定, 不另编料号

特性: Specifications:
 电器 Electrical:
 接触阻抗: Contact Resistance
 30milliohms MAX
 耐电压: Dielectric Withstanding Voltage:
 500V AC AT sea Level
 绝缘阻抗: Insulation Resistance:
 500MEGA ohms MIN
 Working temprayure: -30° C~+85° C

材料: Material:
 塑胶: LCP
 端子: Contact: C2680
 Plated Gold in Mating Area;
 Tin/Lead On Solder Talls
 外壳: Shell: SPCC
 寿命测试: life test:
 插入力: 插入力MAX: 4.5Kgf 拔出
 力MIN: 0.45Kgf
 5000次, 插拔速度300次/小时
 盐雾测试: 12H

Recommended P.C.B Layout (component side)

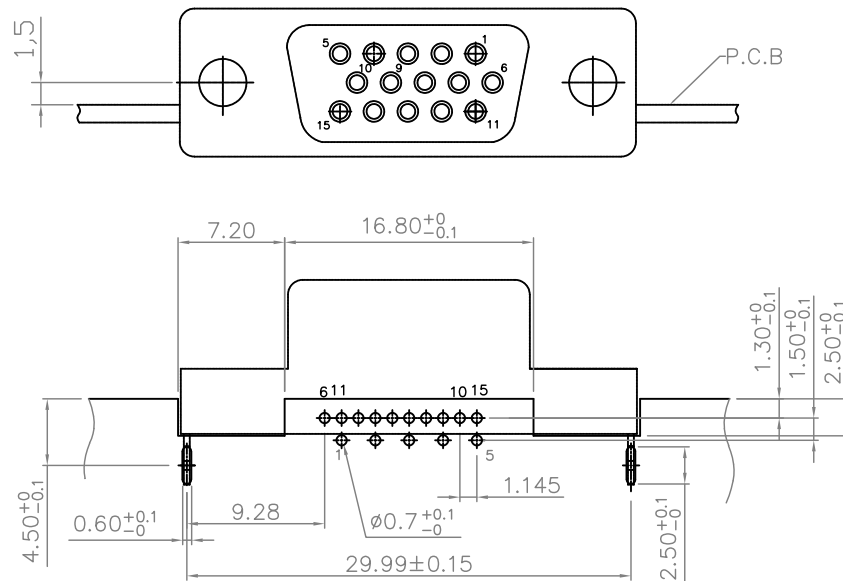

| | | | | |
|-----|-----------|-------------------|-------|------------|
| 5 | RIVET | NICKEL PLATED | | |
| 4 | SHELL | NICKEL PLATED | | |
| 3 | FORK | TIN PLATED | | |
| 2 | TERMINAL | COPPER ALLOY | | GOLD FLASH |
| 1 | HOUSING | HIGH TEMP PLASTIC | BLACK | UL94V-0 |
| NO. | PART NAME | DESCRIPTION | | REMARK |



深圳市华宇创精密电子有限公司

| | | | |
|---|---------------------|----------------------|--|
| TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5' | DRAWN BY : 陈一鸣 | DATE : 2014-02-23 | PART NAME: SLIM VGA 15P/F正向CL=1.5mm |
| | CHECKED BY: 马跃 | DATE : 2014-02-23 | PART NO. : HYC04-SDR15B-150 |
| UNIT: mm [inch] SCALE:1:1 SIZE: A4 | APPROVED BY: 邱国夷 | DATE : 2014-02-23 | DRAW NO. : HYC-SDR135685201 |
| | | | SHEET NO. : 1 OF 1 |