

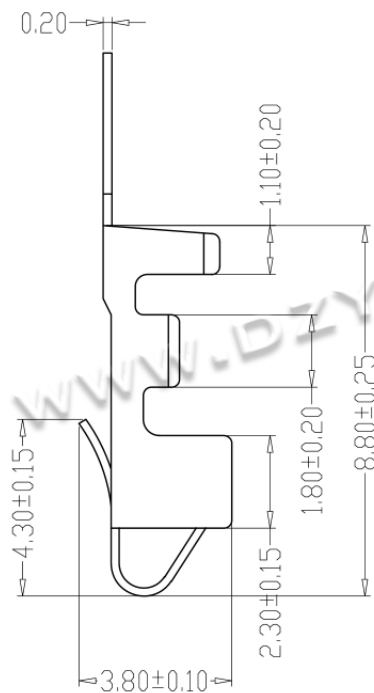
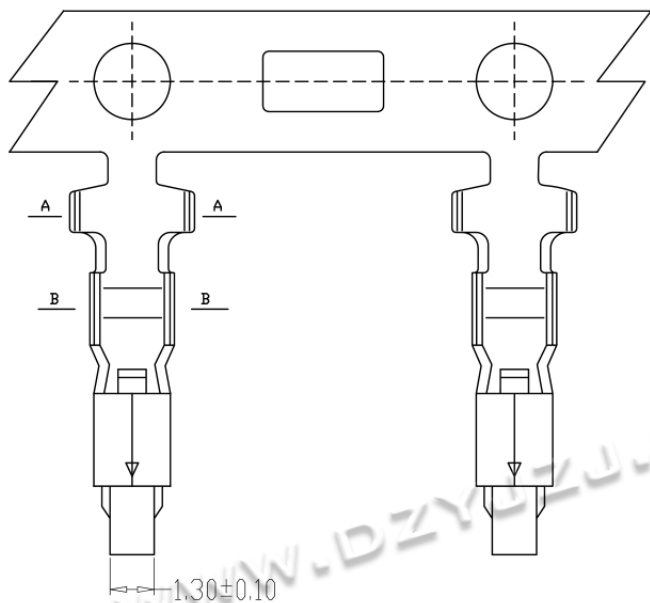


SEC:A-A



SEC:B-B




SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material:Phosphoric bronze Tin-plated
- 8、Applicable Wire Sizes:AWG#22~28#



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY :	DATE :	PART NAME:	
	陈一鸣	2014-02-23	SM 母端子	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY:	DATE :	PART NO.	HYC159-PT-250
	马跃	2014-02-23	MOLD NO.	
	APPROVED BY:	DATE :	DRAW NO:	HYC-1905191008
	邱敏	2014-02-23	SHEET NO.	1 OF 1

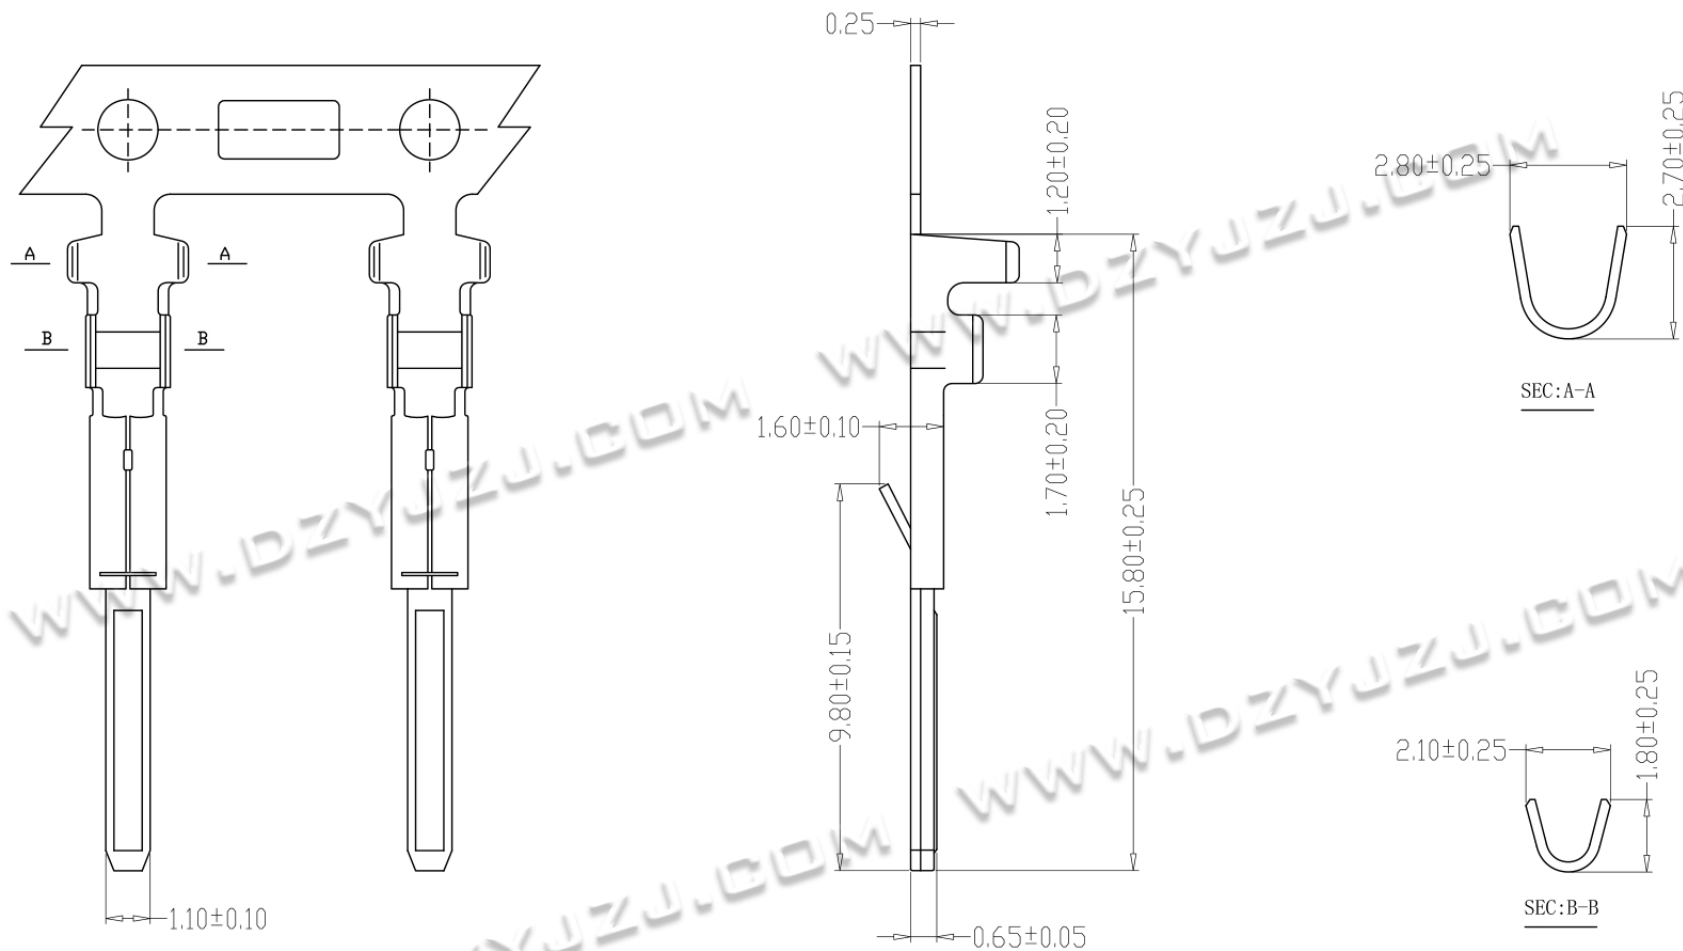


SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Phosphoric bronze Tin-plated
- 8、Applicable Wire Sizes: AWG#22~28#



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2° X.X' ±0.5°	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SM 公端子	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC159-RT-250	
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-1905191010	
			SHEET NO. 1 OF 1	

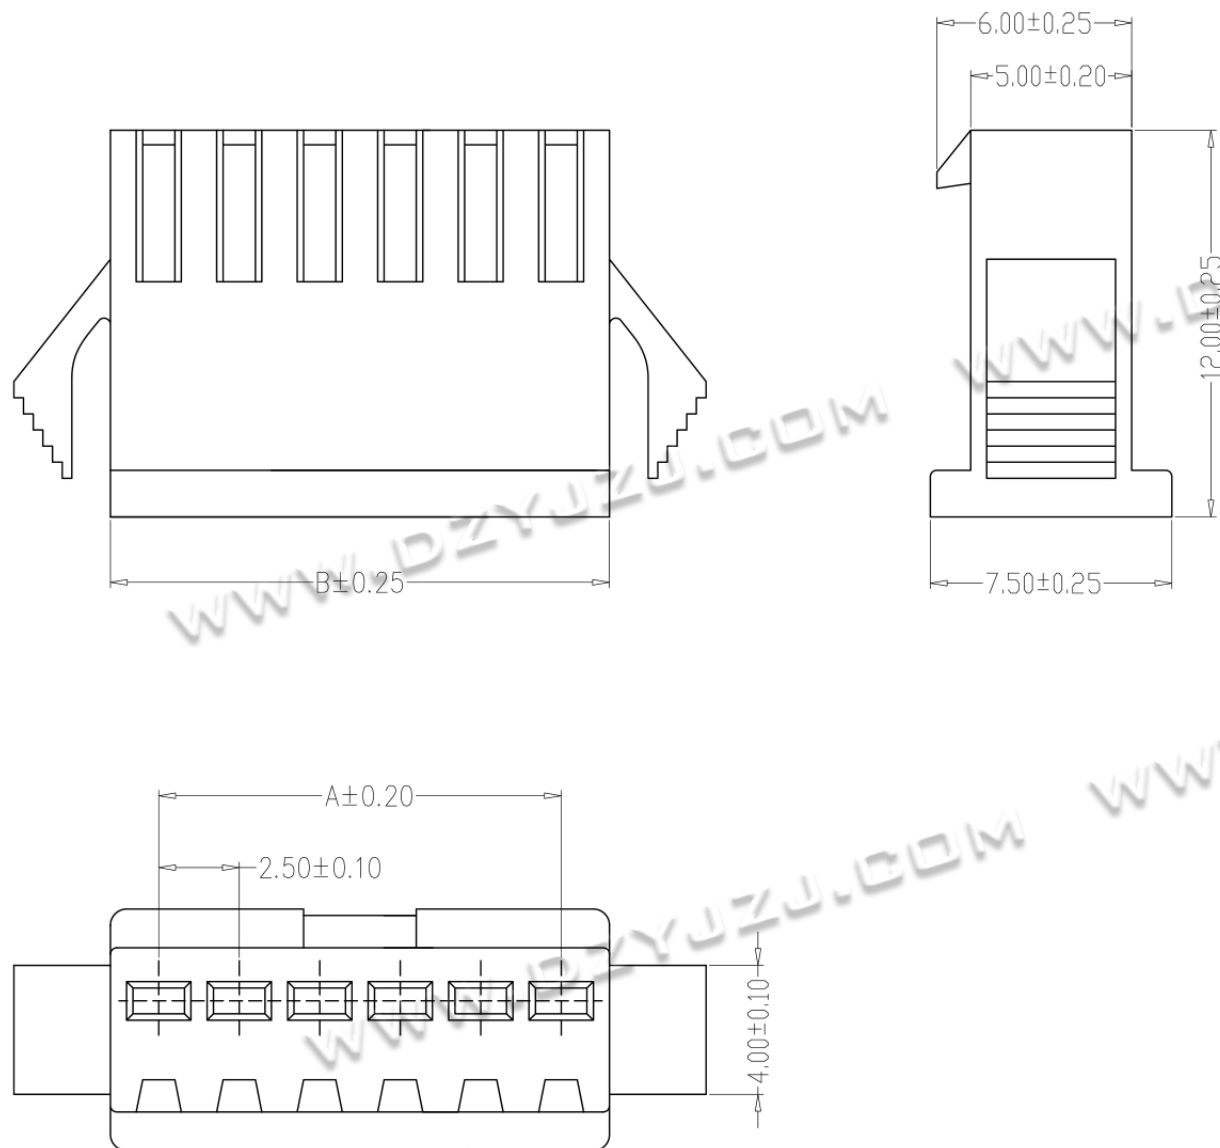

SPECIFICATIONS




- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material:Nylon66, UL94V-0

编 号	尺寸 (mm)	
	A	B
HYC159-02P-250	2.50	5.50
HYC159-03P-250	5.00	8.00
HYC159-04P-250	7.50	10.50
HYC159-05P-250	10.00	13.00
HYC159-06P-250	12.50	15.50
HYC159-07P-250	15.00	18.00
HYC159-08P-250	17.50	20.50
HYC159-09P-250	20.00	23.00
HYC159-10P-250	22.50	25.50
HYC159-11P-250	25.00	28.00
HYC159-12P-250	27.50	30.50
HYC159-15P-250	47.50	50.50



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: SM 公壳	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	SEE TABLE
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-1905191017
			SHEET NO.	1 OF 1

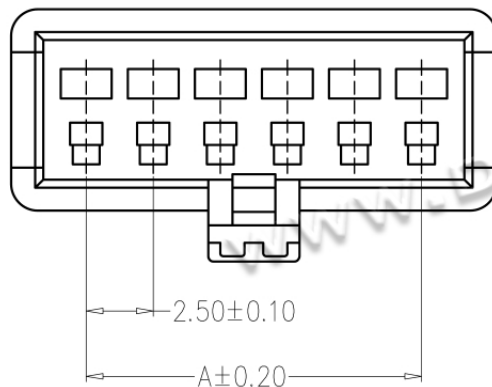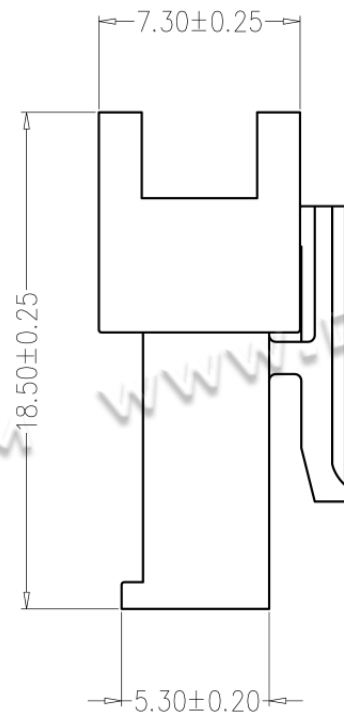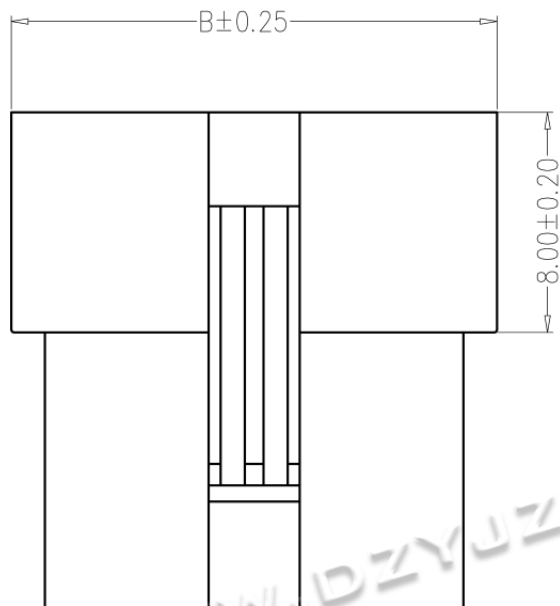

SPECIFICATIONS

- 1、Current Rating: 3A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material:Nylon66, UL94V-0

编 号	尺寸 (mm)	
	A	B
HYC159-02R-250	2.50	8.00
HYC159-03R-250	5.00	10.50
HYC159-04R-250	7.50	13.00
HYC159-05R-250	10.00	15.50
HYC159-06R-250	12.50	18.00
HYC159-07R-250	15.00	20.50
HYC159-08R-250	17.50	23.00
HYC159-09R-250	20.00	25.50
HYC159-10R-250	22.50	28.00
HYC159-11R-250	25.00	30.50
HYC159-12R-250	27.50	33.00
HYC159-15R-250	47.50	53.00




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

SM 母壳

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

SEE TABLE

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-1905191021

SHEET NO.

1 OF 1