



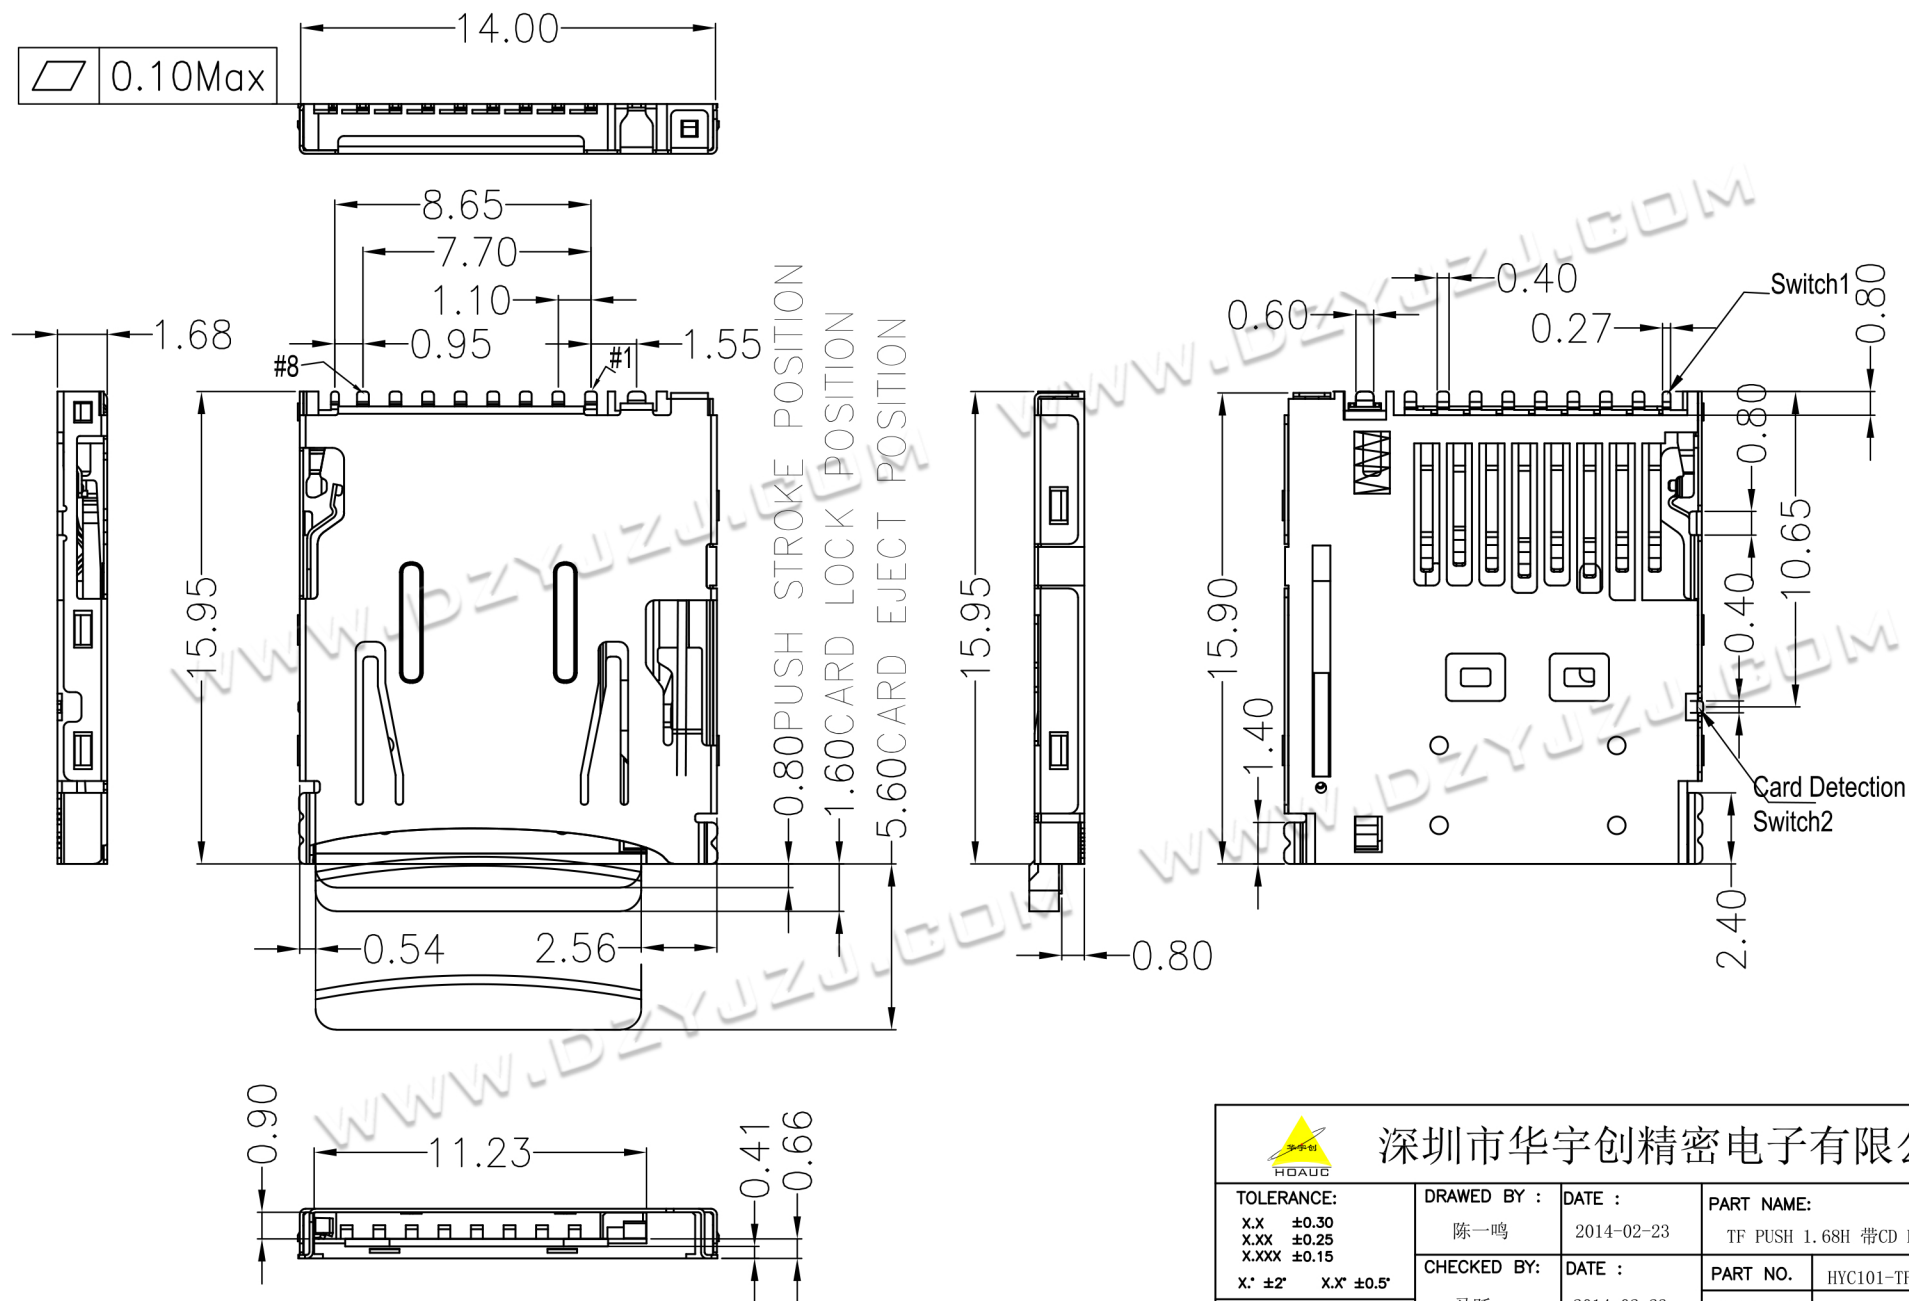

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X.* ±2° X.X° ±0.5°



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

CHECKED BY:

马跃

APPROVED BY:

邱国夷

DATE :

2014-02-23

DATE :

2014-02-23

DATE :

2014-02-23

PART NAME:

TF PUSH 1.68H 带CD PIN

PART NO.

HYC101-TF10-168


MOLD NO.

DRAW NO:


HYC-TF180811075

SHEET NO.

1 OF 1

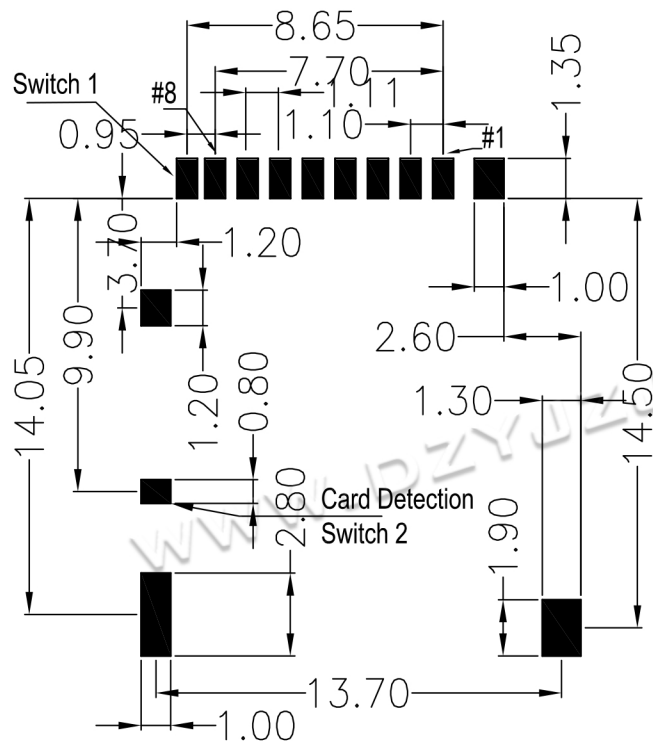

PCB AREA
RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

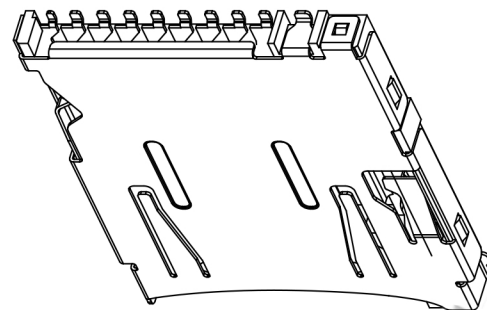

Specification

MATERIAL:

Insulator: High Temperature Thermoplastic, UL 94V-0.

Contact: Copper Alloy

Shell: sus

PLATING:

Contact: Plated 50u'' Ni All, Over all Au 1u

Shell: Plated 50u'' Ni Overall

Plated 1u''Au Selective Contact Area

Electrical:

Current Rating :0.5A.max

Voltage Rating :5V AC/DC

Ambient Temperature Range : $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$

Storage Temperature Range : $-25^{\circ}\text{C}\sim 85^{\circ}\text{C}$

Ambient Humidity Range :95% R.H. Max.


Contact Resistance:100m max.

Insulation Resistance:1000M min./500VDC

Mating Cycles:5,000 Insertions

产品耐温温度: 260°C

CIRCUIT:

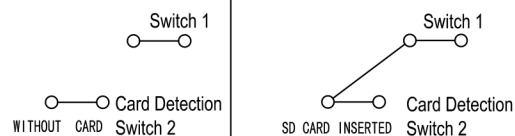

PIN NO.	PIN ASSIGNMENT
1#	DAT2 信号
2#	CD/DAT3 信号
3#	CMD 数据输入
4#	VDD 电压/电
5#	CLK 脉冲
6#	VSS 接地
7#	DAT0 信号
8#	DAT1 信号



深圳市华宇创精密电子有限公司


TOLERANCE:

X.X ± 0.30

X.XX ± 0.25

X.XXX ± 0.15

X' $\pm 2^{\circ}$ X.X' $\pm 0.5^{\circ}$



UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NAME:

TF PUSH 1.68H 带CD PIN

PART NO.

HYC101-TF10-168

MOLD NO.

DRAW NO:

HYC-TF180811075

SHEET NO.

1 OF 1