


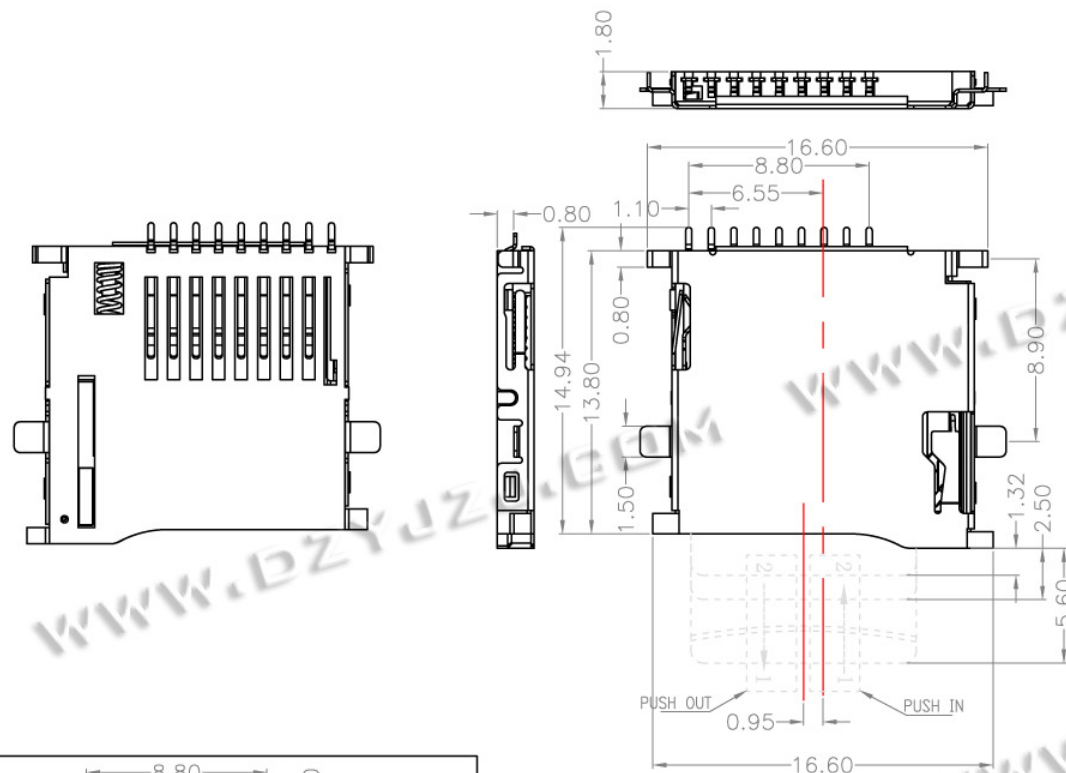

NOTES:

1.MATERIAL:

HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.

CONTACT: COPPER ALLOYS.

COVER: COPPER ALLOYS OR STEEL.

2.PLATING:



UNDERPLATE: NICKEL.

CONTACT AREA: GOLD OVER NICKEL.

SOLDER AREA: TIN OVER NICKEL.

3.MULTIMEDIA CARD COMPATIBLE

PIN NO.	NAME	YTYPE	DESCRIPTION
1	DAT2	I/O/PP	DATE LINE(BIT2)
2	CD/DAT3	I/O/PP	CARD DETECT DATE LIN(BIT3)
3	CMD	PP	COMMAND RESPONSE
4	VDD	S	SUPPLY VOLTAGE
5	CLX	I	CLOCK
6	VSS	S	SUPPLY VOLTAGE GROUND
7	DAT0	I/O/PP	DATE LINE(BIT0)
8	DAT1	I/O/PP	DATE LINE(DIT1)

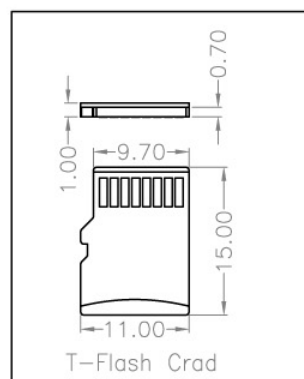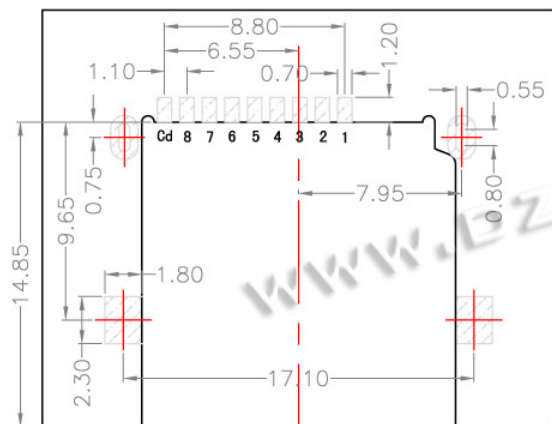

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X.X' ±2" X.X' ±0.5"

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

TF PUSH 沉板0.8 (定位片前贴后插)

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC38-TF09-080

APPROVED BY:

邱国夷

DATE :




2014-02-23

DRAW NO:

HYC-TF12098321

SHEET NO.

1 OF 1

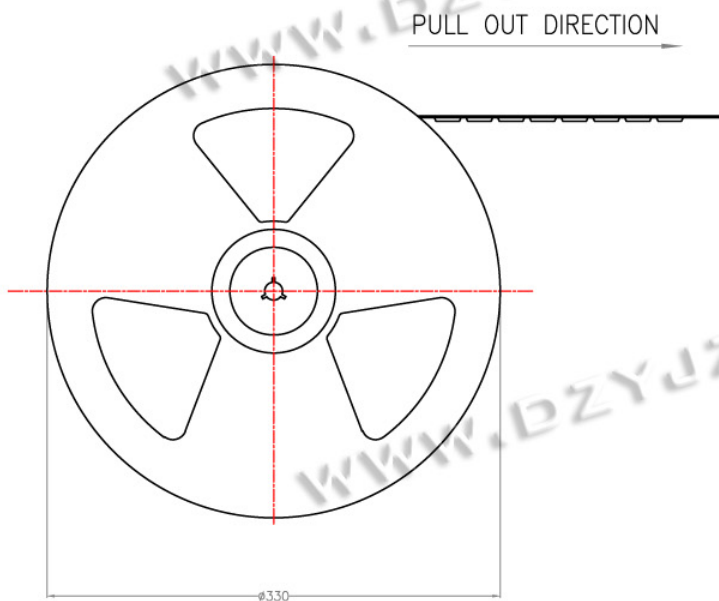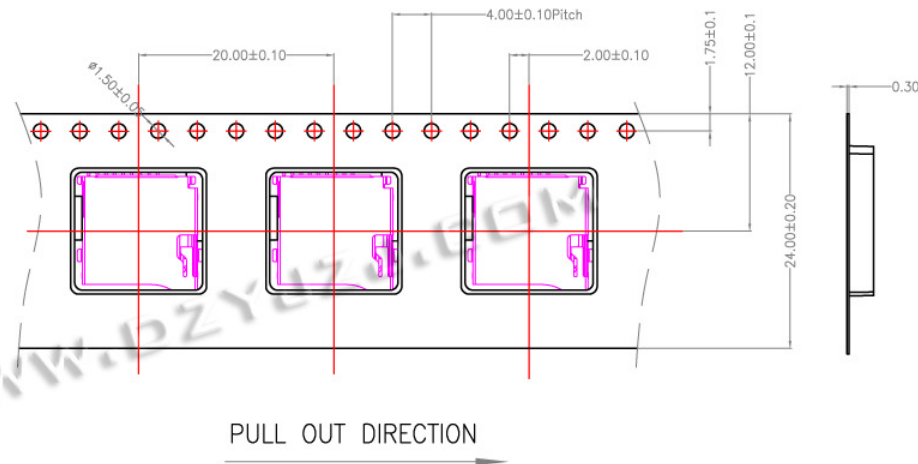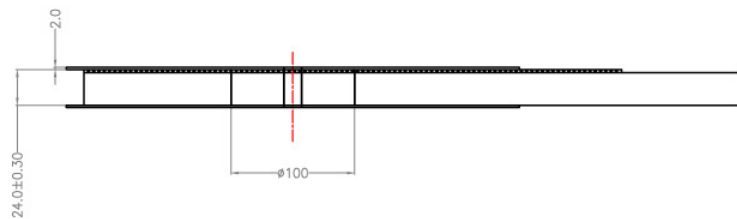

Note:


1. 10 sprocket hole pitch cumulative tolerance ± 0.2
2. Carrier camber is within 1 mm in 250mm.
3. Material: Black Conductive Polystyrene Alloy
- 100 % recyclable.
4. All dimensions meet EIA-481-B requirements.
5. Thickness: 0.3 ± 0.05 mm.
6. Component load per 13" reel: 1000 pcs.
7. A box of 10 volumes, 5000PCS
8. product weight: 6.5g; weight of a roll: 980g ; weight of a box: 5100g.
9. empty box: 200g / 45*345*155



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1

THE PACKING FOR SD CARD SERIES PUSH TYPE

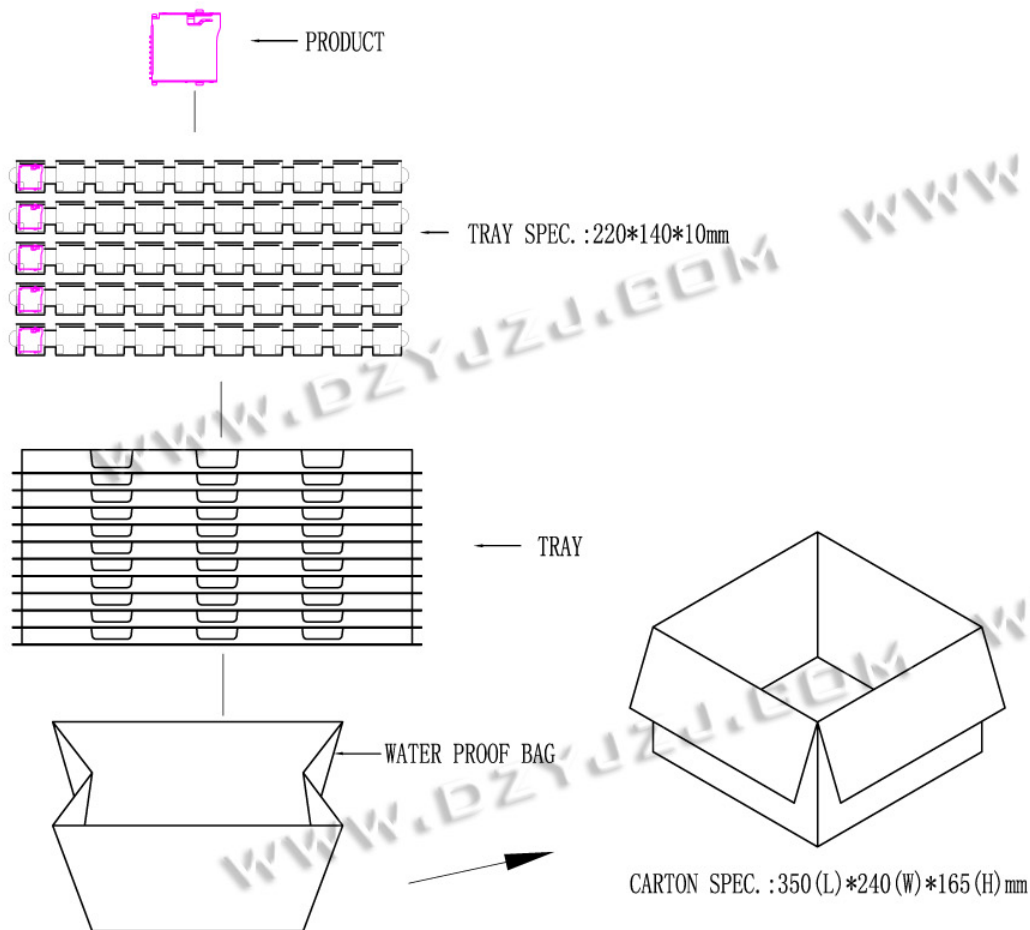

PACKING STEP

Note:

PUT PRODUCT INTO THE TRAY, AND AS SAME DIRECTION

THE DIRECTION REFERS TO DRAWING

QUANTITY OF PER TRAY: 50 PCS

QUANTITY OF PER CARTON: 21 TRAYS

THE TOP TRAY NOT PUT INTO PRODUCT
AS A COVER TO PROTECT PRODUCT

QUANTITY OF PER CARTON: 5000 PCS

THE UNFILLING-CARTON MUST BE FILLED WITH ASSUAGEMENT

THE CARTON FULLY FILLED WITH PRODUCTS

THE MAX. ACCUMULATING QUANTITY IS 5 CARTONS

THE WEIGHT OF PER PRODUCT: 1g; PER CARTON: 3.15Kg




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

PART NAME:

包装图

CHECKED BY:

马跃

DATE:

2014-02-23

APPROVED BY:

邱国夷

DATE:

2014-02-23

PART NO.

MOLD NO.

DRAW NO:

SHEET NO.

1 OF 1