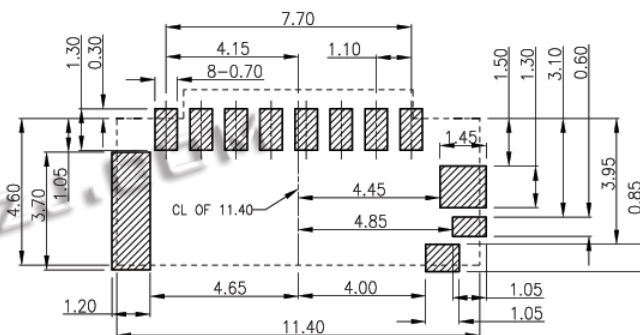
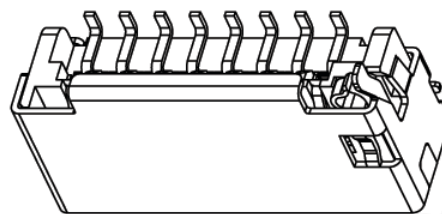
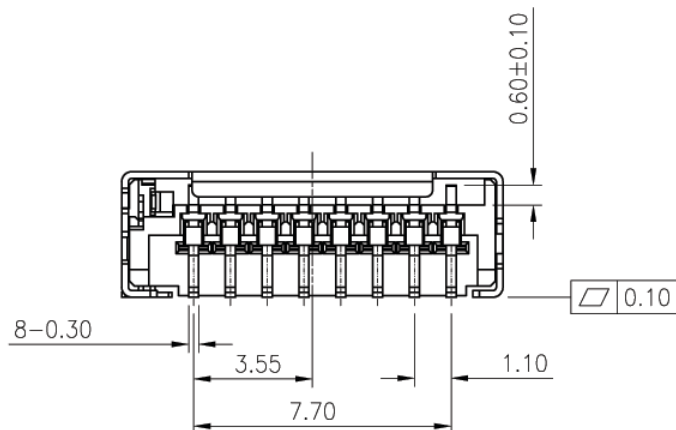
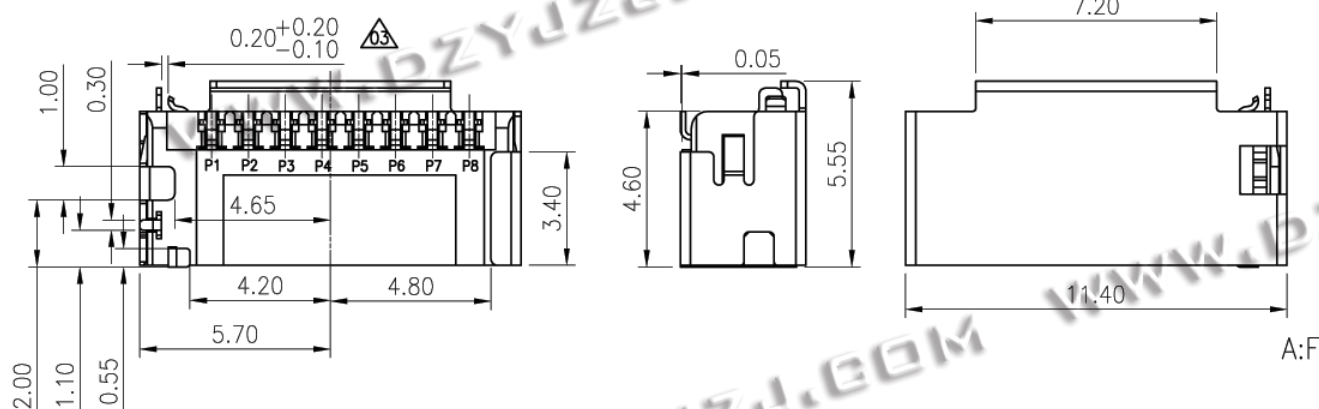


RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05

NOTES:

1.MATERIAL:

1.1 Housing: High Temperature Thermoplastic
UL94V-0,Color:Black

1.2 Terminal:Copper Alloy

1.3 Stator1:Copper Alloy

1.4 Stator2:Copper Alloy

1.5 Shell:Stainless Steel

2.SPECIALITY:

2.1 Rated Current:0.5A

2.2 Rated Voltage:30V


2.3 Contact Resistance:50mΩ Max

2.4 Insulation Resistance:100MΩ Min 100V DC

2.5 Dielectric Withstanding Voltage:100V AC

2.6 Solder Ability:235±5°C;5±0.5s

2.7 Durability:5000 cycles

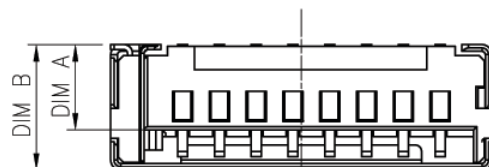2.8 Operating Condition:Temperature:-30°C~+80°C;
Humidity:80%R.H Max

DIM A	DIM B
1.45	2.65
1.65	2.85
1.80	3.00
2.15	3.35
2.55	3.75

Pin No.	
P1	DAT2
P2	CD\DAT3
P3	CMD
P4	VDD
P5	CLK
P6	VSS
P7	DAT0
P8	DAT1



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5" UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: TF SIMPLE TYPE 带检测PIN
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC61-TF08-XXX
	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HYC-TF16012010
			SHEET NO. 1 OF 1