
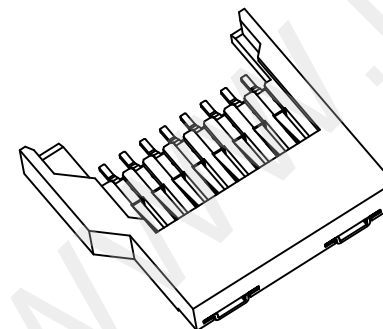
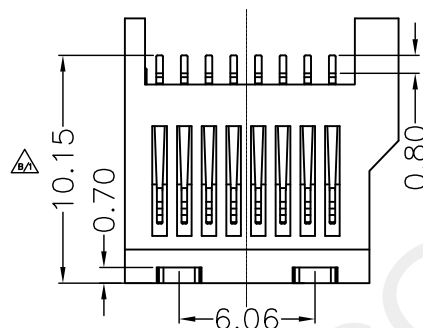
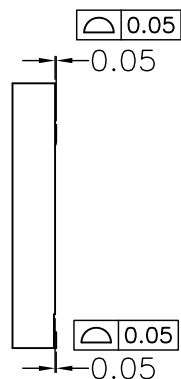
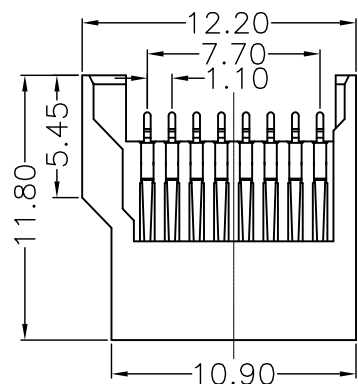


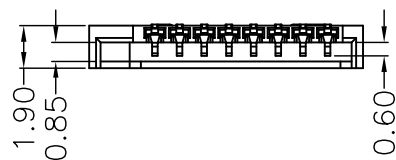


NOTES:


- 1.MATERIAL:
HOUSING: HIGH TEMPERATURE THERMOPLASTIC
UL94V_0,COLOR:BLACK.
CONTACT: COPPER ALLOYS.
COVER: COPPER ALLOYS OR STEEL.
- 2.PLATING:
UNDERPLATE: NICKEL.
CONTACT AREA: GOLD OVER NICKEL.
SOLDER AREA: TIN OVER NICKEL.
- 3.MULTIMEDIA CARD COMPATIBLE

HYC186-TF09-190-X

B 端子镀半金雾锡
Q 端子镀全金


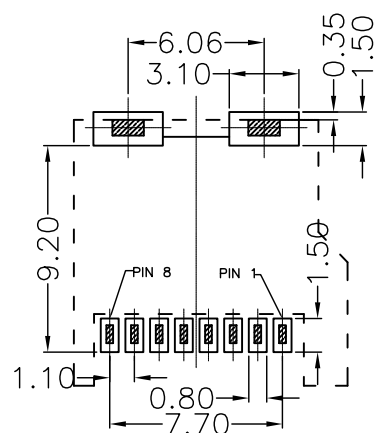


RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: +/-0.05)

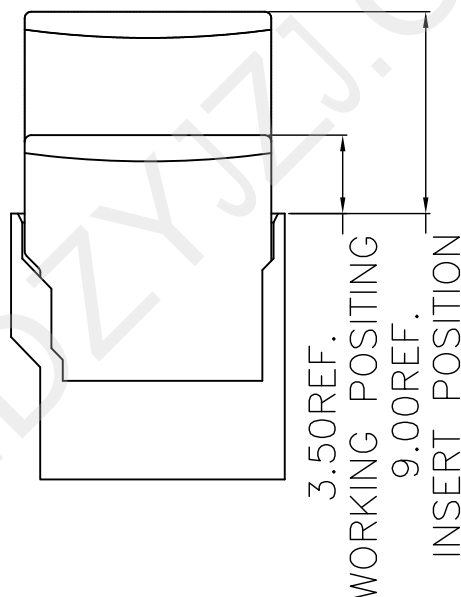


深圳市华宇创精密电子有限公司


TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: TF 简易全塑内焊	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC186-TF09-190-X
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-2507111139
			SHEET NO.	1 OF 1

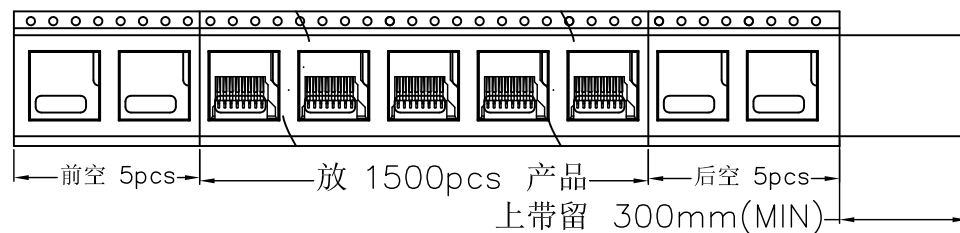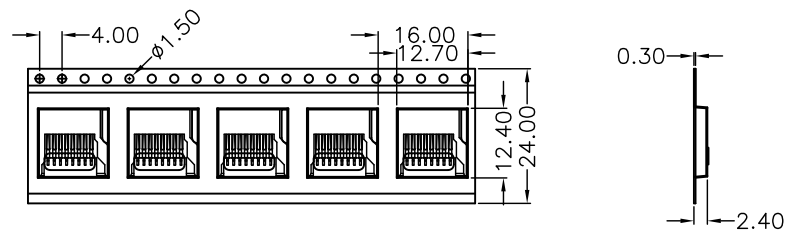

NO.1

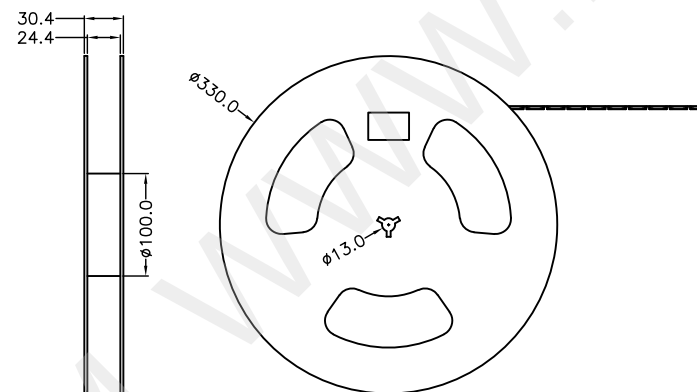


NO.2

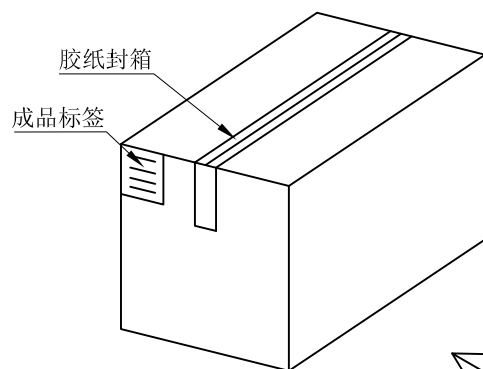

纸箱规格: 330*330*385

NO.4

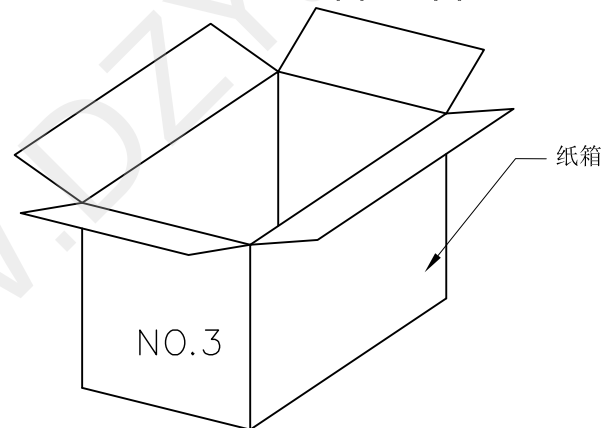

NO.3

1. 材质要求:

- 1.1 纸箱的材质为B=B; 外形尺寸为33*33*38.5;
- 1.2 卷盘的材质为PVC, 卷盘的外形尺寸为 $\phi 330 \times 30.4$;
- 1.3 卷带的材质为PVC, 卷带的外形尺寸为24160*24.00*2.4mm;

2. 包装方式:

- 2.1 将卷带放入包装机后, 前空5PCS, 后放产品1500PCS, 再后空5PCS; 上带留300MM长度。
- 2.2 将包装好的产品从包装机上取下并包装好;
- 2.3 把累叠好的12盘叠放入纸箱中共计18Kset;
- 2.4 把包装好的成品打包封箱, 并在纸箱外贴上标签



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X.' $\pm 2'$ X.X' $\pm 0.5'$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	
			SHEET NO.	1 OF 1