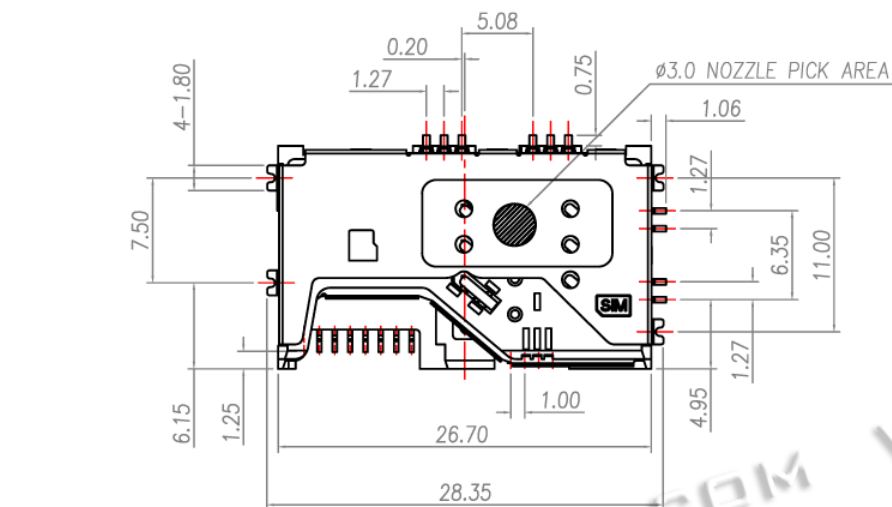


NOTES:

1) MATERIAL:



- 1-1 HOUSING: THERMOPLASTIC, UL94 V-0, COLOR: BLACK
 1-2 CONTACT: COPPER ALLOY, T=0.15mm
 1-3 SHELL: STAINLESS STEEL T=0.15mm
 1-4 RIB: STAINLESS STEEL T=0.12mm

2) FINISH:


- 2-1 CONTACT: Au PLATING ON CONTACT AREA (SEE P/N)
 50u" MIN NICKEL UNDERPLATING OVER ALL
 2-2 SHELL: 1u" MIN Au PLATING ON SOLDER AREA
 50u" MIN NICKEL UNDERPLATING OVER ALL

3) PRODUCT SPECIFICATIONS:

- 3-1 VOLTAGE RATING: 50V
 3-2 CURRENT RATING: 0.5A
 3-3 INSULATION RESISTANCE: 1000MEG.OHM MIN
 3-4 CONTACT RESISTANCE: 100 MILL.OHM MAX
 3-5 OPERATION TEMPERATURE: -20° TO +85°
 3-6 DURABILITY: 3000 CYCLES

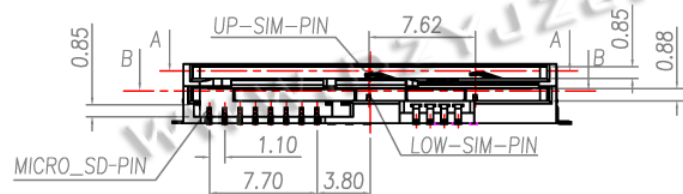

COPLANARITY (Signal pin & shell)

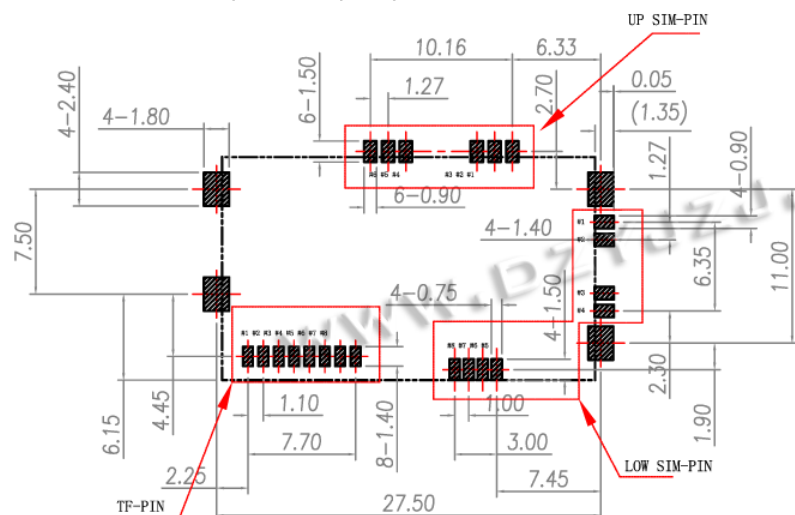

RECOMMENDED PCB LAYOUT
 (TOLERANCE: ± 0.05)


NAME \ PIN	#1	#2	#3	#4	#5	#6	#7	#8
SIM-PIN	VCC	RST	CLK	RESERVED	GND	VPP	I/O	RESERVED
TF-PIN	DAT 2	CD/DAT 3	CMD	VDD	CLK	VSS	DAT 0	DAT 1



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30
 X.XX ± 0.25
 X.XXX ± 0.15

X' $\pm 2'$ X.X' $\pm 0.5'$ 

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

TF+双SIM三合一卡座

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC14-3IN122-267


MOLD NO.

DRAW NO:

HYC-IN113564587

SHEET NO.

1 OF 1

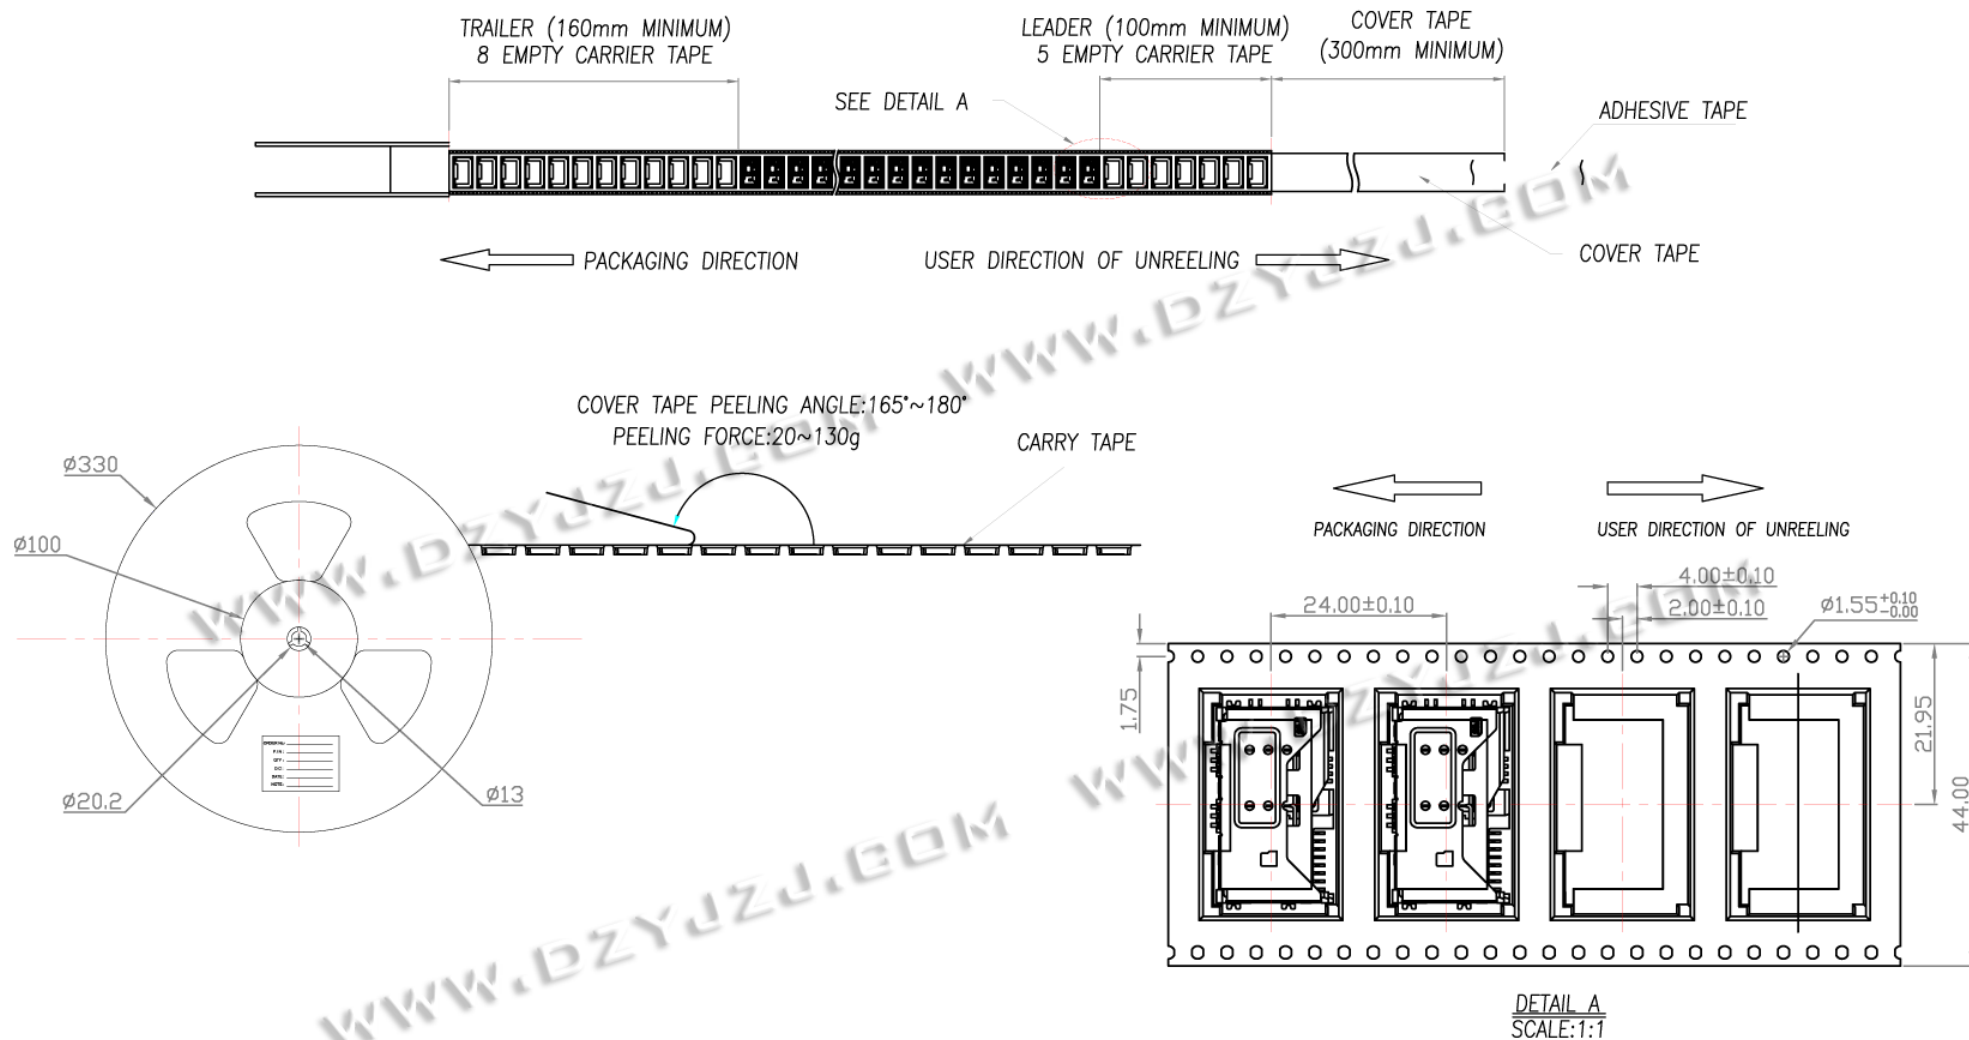

STC642-50-RN0A	500	6	3000	335X335X310
PRODUCT NO.	QTY/REEL	REEL/CARTON	QTY/CARTON	CARTON SIZE



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

包装图

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

MOLD NO.

APPROVED BY:

邱国夷

DATE :

2014-02-23

DRAW NO:

SHEET NO.

1 OF 1