

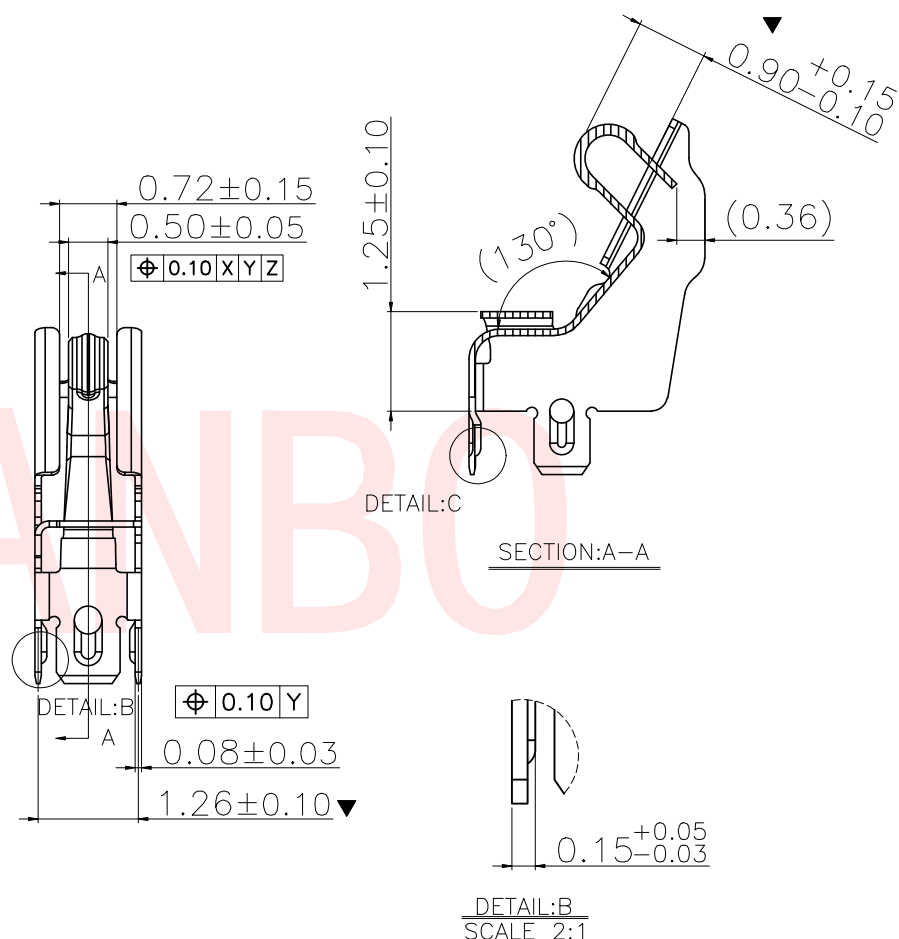


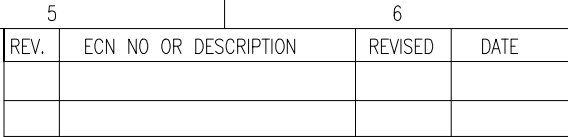


UNLESS OTHERWISE SPECIFIED TOLERANCES		 东莞市汉博电子科技有限公司 DONGGUAN HANBO TECHNOLOGY CO., LTD				
DECIMALS:	ANGLES:	TITLE	充电弹片L2.77×W1.34×H3.17 Shielding Clip,SMT			
X :±0.30	X :±2°	DWN	xiong	PART NO. TXTA-317BA-0038A		
X.X :±0.20	X.X :±1°	CHKD	lee	SCALE:1:1	UNIT: mm	
X.XX :±0.10		APVD	wang	SIZE: A4	SHEET:10F 1	REV: A4
		CUSTOMER COPY				

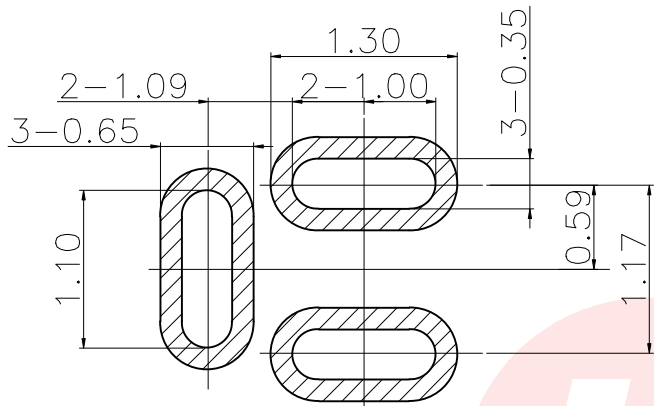



RECOMMENDED PCB LAYOUT
TOLERANCE ± 0.05 (焊盘推荐图)
(FOR REFERENCE ONLY)

耳机插入示意图

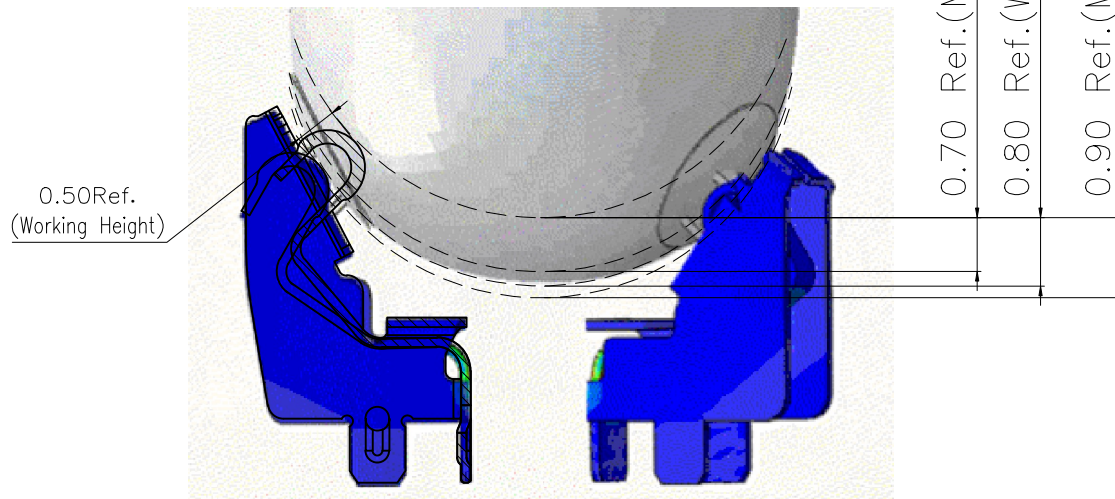

Working Position

耳机插入力曲线图

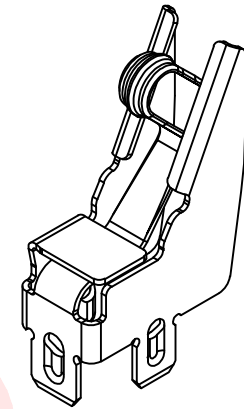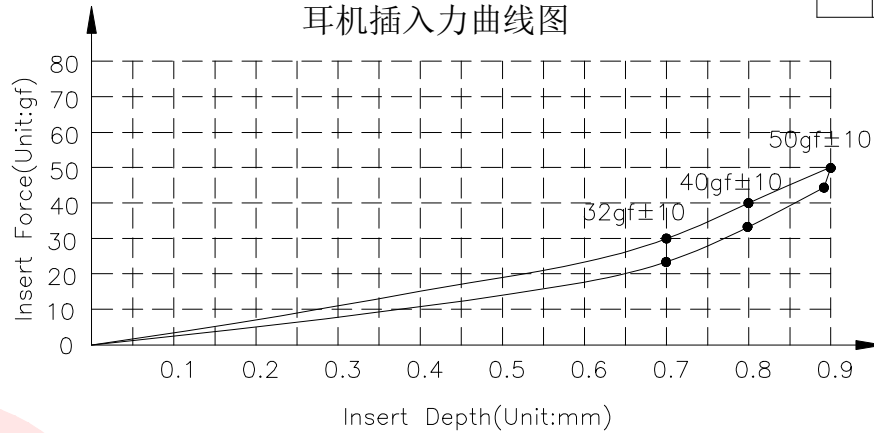

3D VIEW

NOTES:

1): MATERIAL:

1-1: STAINLESS STEEL THICKNE=0.08 ± 0.03 mm

2): FINISH:

2-1: 10u"min Au PLATING ON CONTACT AREA,
1u"min Au PLATING ON SOLDER AREA,
50~150u" NICKEL UNDER PLATING OVER ALL.

3): PRODUCT SPECIFICATIONS:

3-1: RATED CURRENT: 1.5A/MAX

3-2: VOLTAGE RATING: 5.0V/AC/DC/MAX

3-3: CONTACT RESISTANCE: 50m Ω /MAX

3-4: DURABILITY: 10,000 CYCLES.

4): SALT SPRAY: 24 HOURS (JUDGED BY ALL OUTSIDE AREA)

5): DIMENSIONS MARKED $\blacksquare$, CPK>1.33

6): ALL DIMENSIONS MARKED $\blacktriangledown$ MUST BE CONTROLLED BY QC;

7): COMPLIANT TO RoHS&LEAD FREE

UNLESS OTHERWISE
SPECIFIED TOLERANCES

DECIMALS: ANGLES:
X : ± 0.30 X : $\pm 2^\circ$
X.X : ± 0.20 X.X : $\pm 1^\circ$
X.XX : ± 0.10



东莞市汉博电子科技有限公司
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	充电弹片 L2.77xW1.34xH3.17 Shielding Clip, SMT			
DWN	xiong	PART NO. TXTA-317BA-0038A		
CHKD	lee	SCALE: 1:1	UNIT: mm	
APVD	wang	SIZE: A4	SHEET: 10F 1	REV: A4

CUSTOMER COPY