

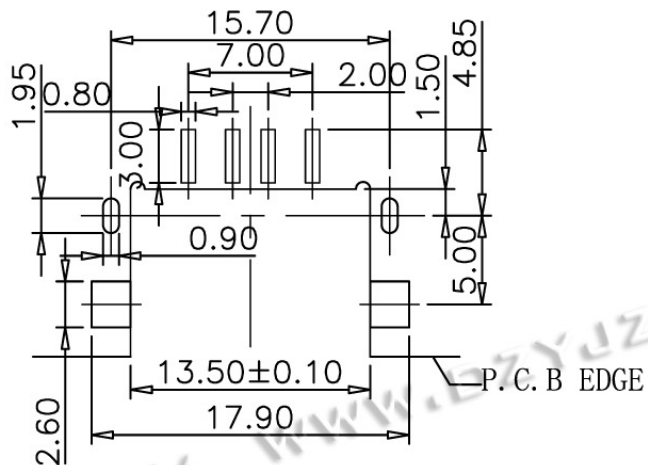
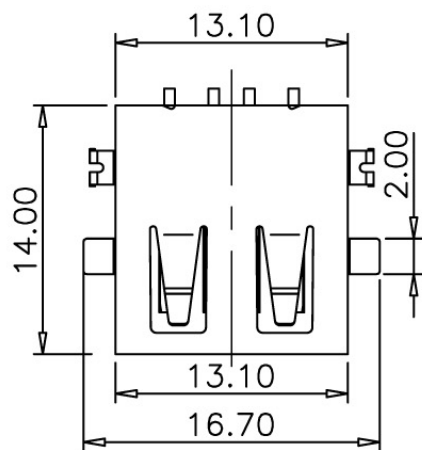

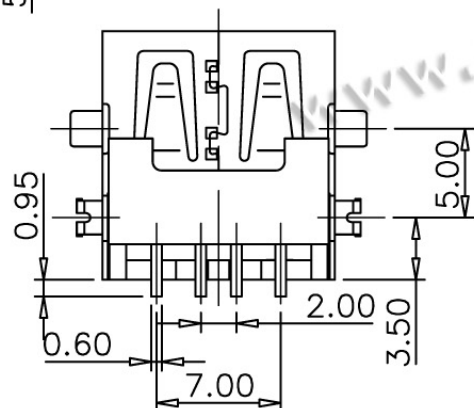


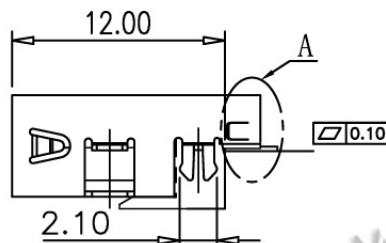

RECOMMENDED P.C.B. PATTERN LAYOUT

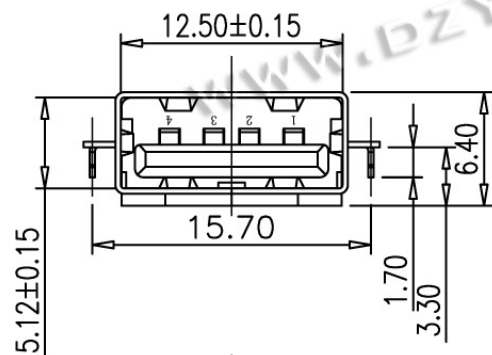

Note:

1. Material:

1.1 Housing:PBT+30%G/F, UL94V-0.

1.2 Shell:BRASS.

1.3 Contact:PHOSPHOR BRONZE

2. FINISH:

2.1 CONTACT Plate with Gold Flash Tin Plate

2.2 shell:Nickel over all plating

3. Specification:

3.1 Dielectric withstanding
voltage:100V (AC).

3.2 Contact resistance:50mΩ Max

3.3 Insulation resistance:100MΩ Min



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2° X.X' ±0.5° UNIT: mm [inch] SCALE:1:1 SIZE: A4	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB AF 刺破式贴板 无卷边
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HXC82-USBA04-300
	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO: HXC-USB15122611
			SHEET NO. 1 OF 1