
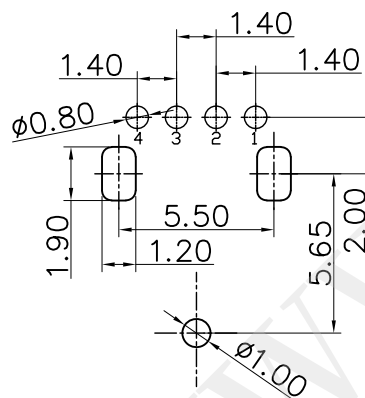
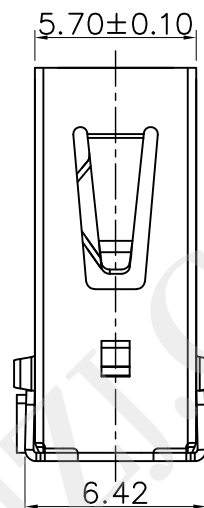
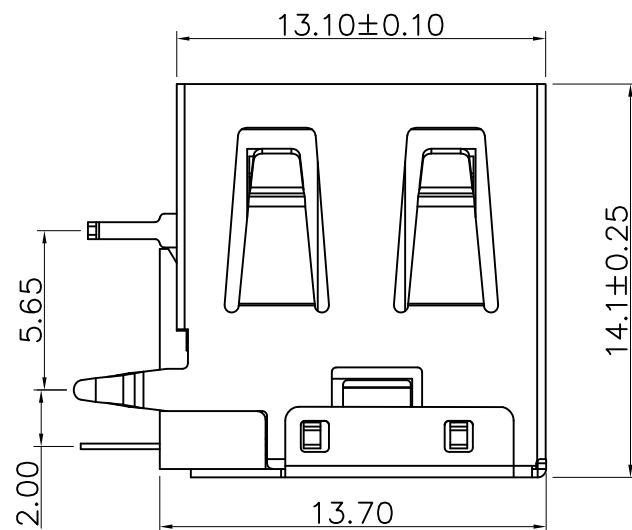
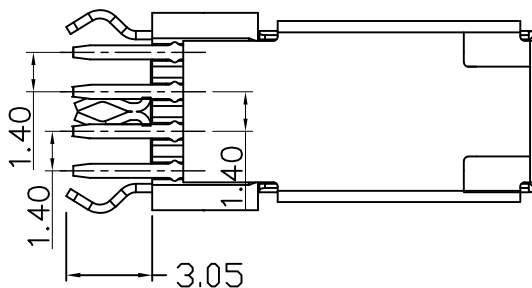


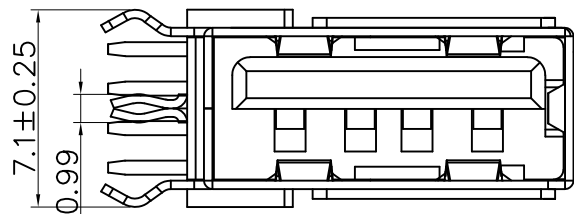

X(材质)	X(颜色)
不锈钢 (S)	黑/black(B)
铜壳 (C)	蓝/blue(BL)
铁壳 (I)	橙/orange(O)
	绿/green(G)
	白/white(W)

规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
1.5A/contact terminal
- 额定电压: Voltage Rating
30V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐压: Dielectric Withstanding Voltage:
500 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)
- 端子保持力: Terminal Retention
1.0kgf(MIN)

原材料: Material:

- 塑胶: Housing:
Hing Temperature Tnermaplastics,
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy C2680/SPCC

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails

端子四周镀50U"(MIN)锡,镀金区域镀100-200U"镀金1U"

- 外壳: Shell:
铜壳四周镀80U"(MIN)锡

Nickel Plating



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB AF 短体侧插无卷边0型脚
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC73-USBA04-140-XX
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-2210311856
			SHEET NO. 1 OF 1