
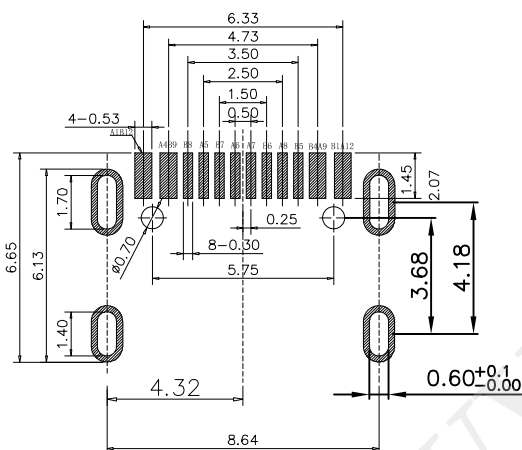
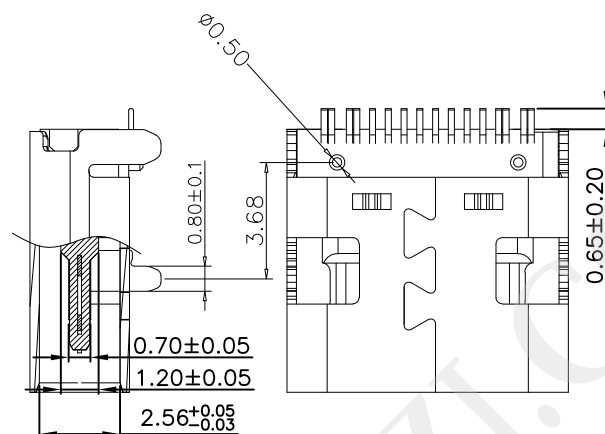
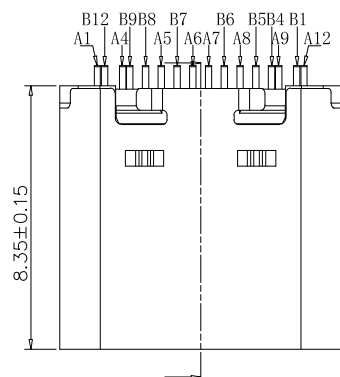



A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME



规格说明: Specifications:

电气特性: Electrical:

- 额定电流: Current Rating
3A/contact terminal
- 额定电压: Voltage Rating
20V DC
- 接触电阻: Contact Resistance
30 milliohms MAX
- 耐压: Dielectric Withstanding Voltage:
300 V AC AT Sea Level
- 绝缘电阻: Insulation Resistance:
1000MEGA ohms MIN

物理性能: Mechanical:

- 插拔力: Connector Mate and Unmate Force
Mate force: 3.57kgf(MAX)
Unmate force: 1.02kgf(MIN)

原材料: Material:

- 塑胶: Housing: LCP+30%GF
- 端子: Contact: Copper Alloy C2680
- 外壳: Shell: Copper Alloy C201 不锈钢
- 卡钩: C201 不锈钢

电镀: Finish:

- 端子: Contact: Plated Gold in Mating Area;
Tin On Solder Tails
端子四周镀30-50U"(MIN)镀底, 接触点镀金1U"
- 外壳: Shell:
不锈钢壳四周镀50-80U"(MIN)镀底,
Nickel Plating



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X.X" ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 母座16P 板上SMT L=8.35
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC620-USBC16-835
	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.
UNIT: mm [inch] SCALE: 1:1 SIZE: A4			DRAW NO: HYC-2510300950
			SHEET NO. 1 OF 1