


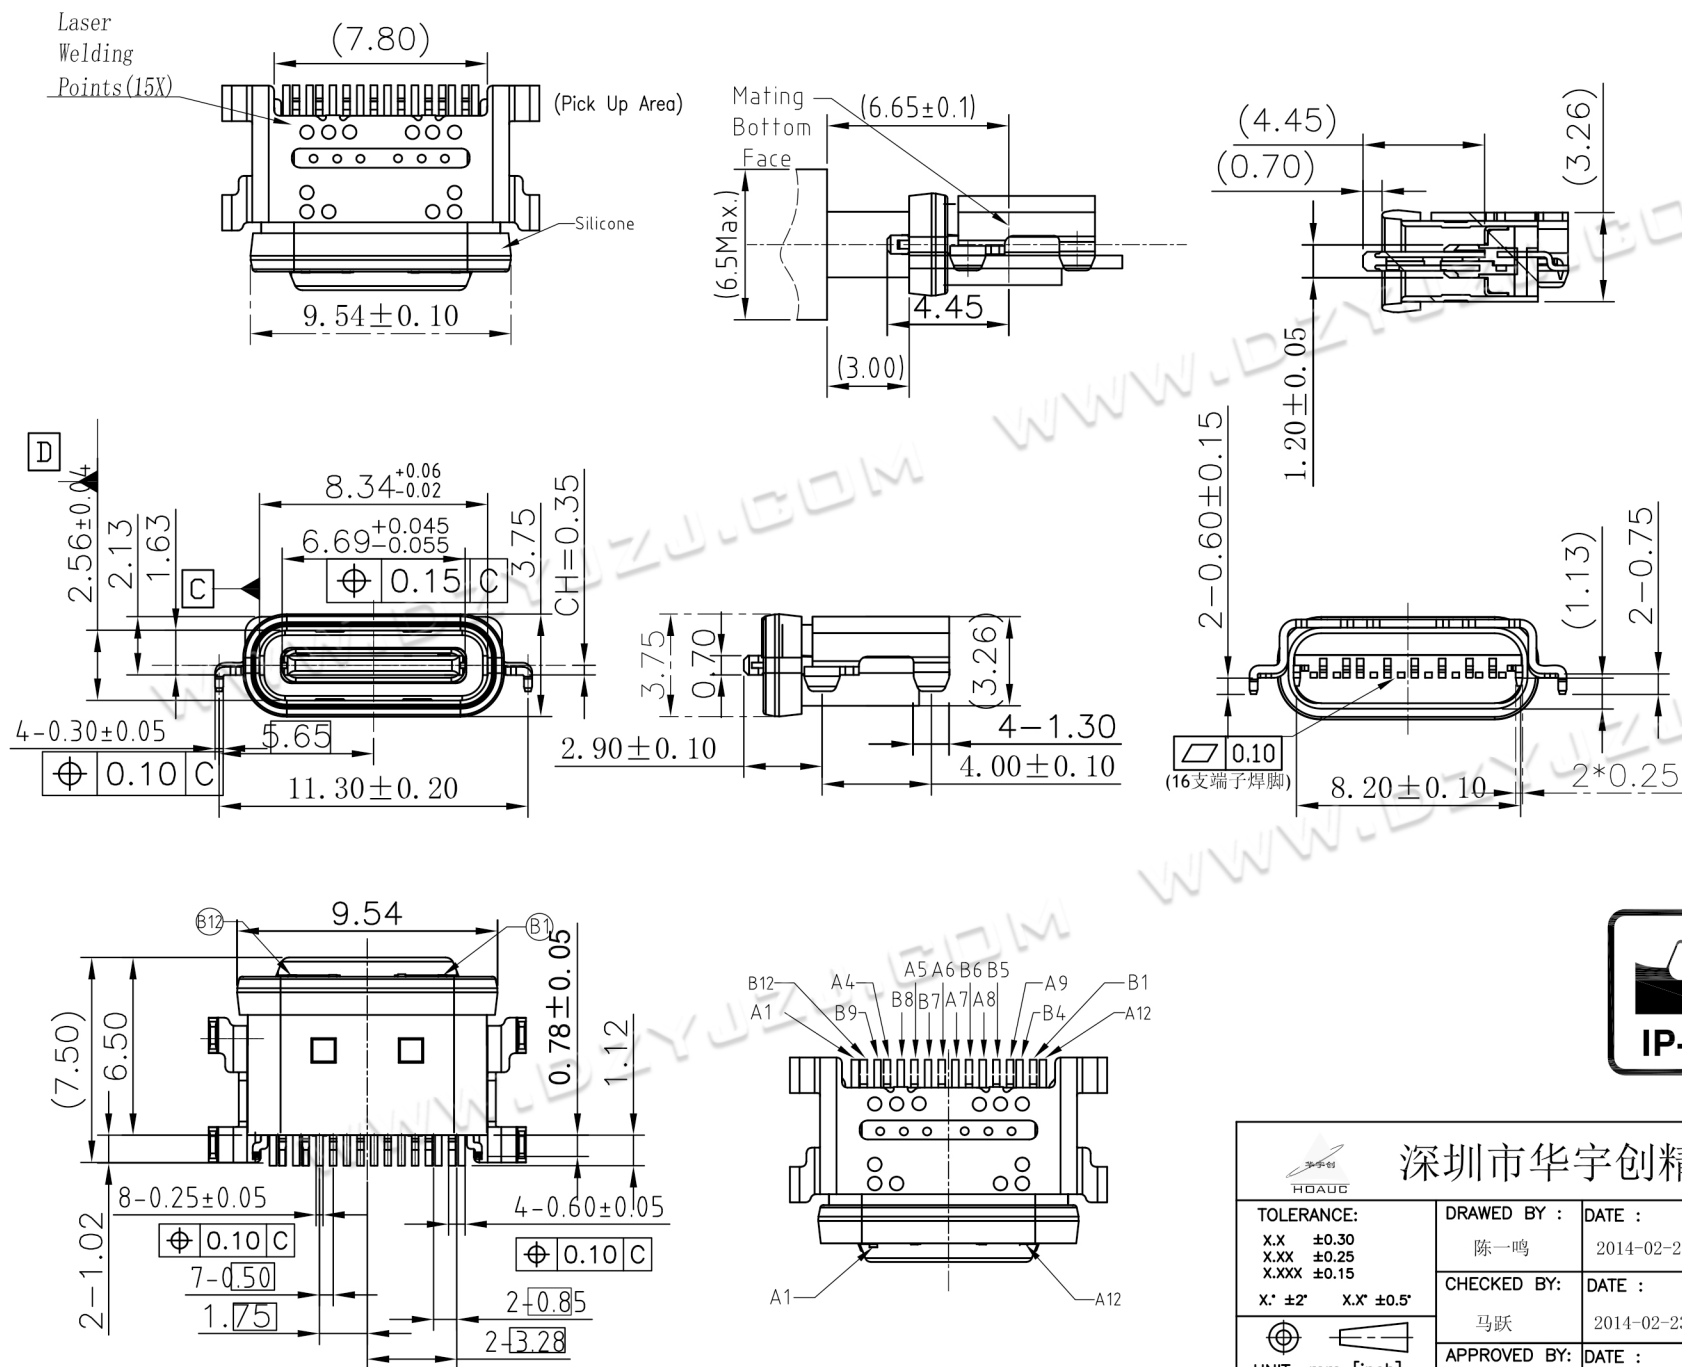

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X." ±2" X.X" ±0.5"

UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY :

陈一鸣

CHECKED BY :

马跃

APPROVED BY :

邱敏

DATE :

2014-02-23

DATE :

2014-02-23

DATE :

2014-02-23

PART NAME:

USB TYPE C 防水母座16P 沉板1.13 带防水胶圈

PART NO.

HYC592-USBC16-113



MOLD NO.

DRAW NO:

HYC-2411281512


SHEET NO.

1 OF 1

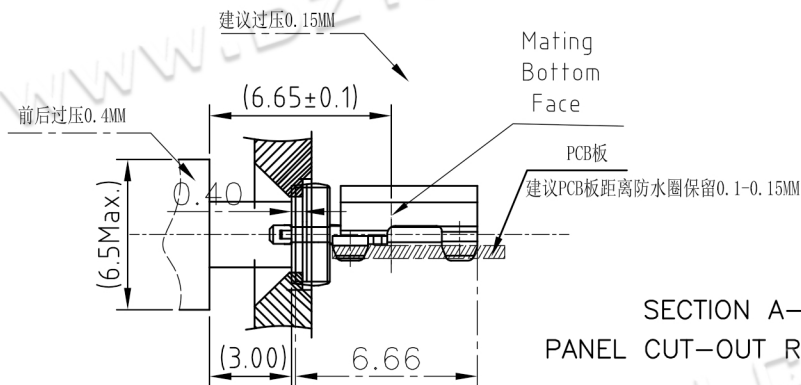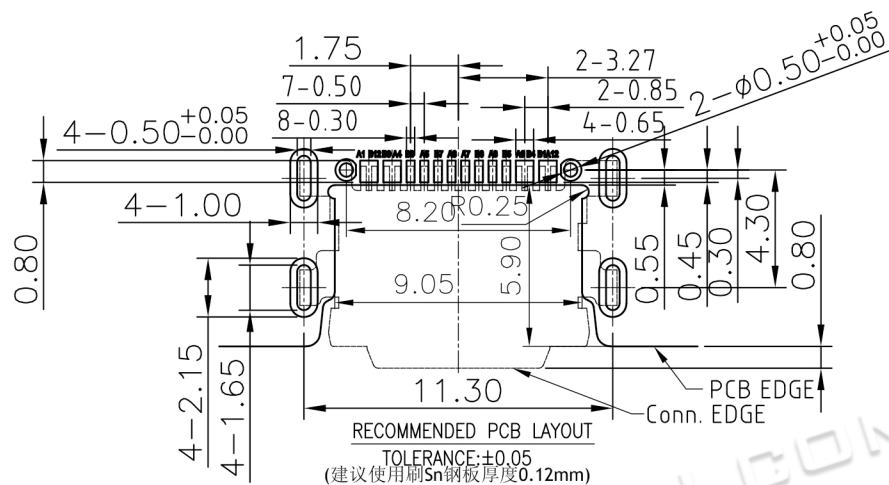

Pin Assignments

Contact Number	Signal Name	Contact Number	Signal Name
A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	Dp1	B7	Dn2
A7	Dn1	B6	Dp2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND

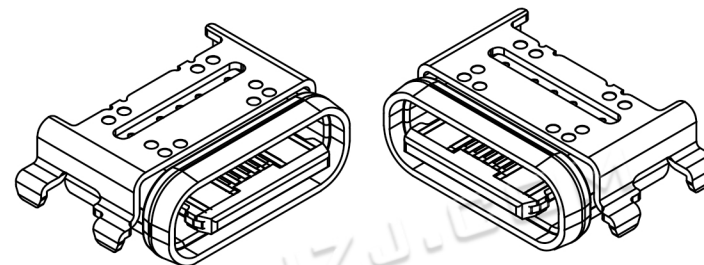

NOTES:

1. MATERIAL SPECIFICATION:

- 1-1. HOUSING: High-Temp Plastics, UL94V-0, Color: Black.
- 1-2. CONTACTS: Copper Alloy T=0.25mm.
- 1-3. OUTER SHELL: Stainless Steel, T=0.30mm.
- 1-4. INNER SHELL: Stainless Steel, T=0.20mm.
- 1-5. MID-PLATE: Stainless Steel, T=0.20mm.
- 1-6. SOLDER-PLATE: Stainless Steel, T=0.10mm.

2. PLATING SPECIFICATION:

2-1. CONTACTS:

- Ni UNDERPLATED OVER ALL;
- Gold Plated On Contact Area;
- Gold Flash Plated On Solder Area.

2-2. SHELL:

- Ni UNDERPLATED OVER ALL;
- Gold Flash Plated ON Solder Leg.

3. RoHS AND HF COMPLIANT.

4. MECHANICAL PERFORMANCE:

- 4-1. MATING FORCE: 6~20N (Initial); 5~20N (After)
- 4-2. UNMATING FORCE: 8~20N (Initial); 6~20N (After)
- 4-3. DURABILITY: 10000 CYCLES.

5. ELECTRICAL PERFORMANCE:

- 5-1. CURRENT RATING: 3A; VOLTAGE RATING: 5.0V
- 5-2. LLCR:

VBUS & GND PINS: 40mΩ/PIN MAX.;
OTHERS PINS: 40mΩ/PIN MAX.;
LLCR MAX. CHANGE OF ALL PINS: 20mΩ.

- 5-3. INSULATION RESISTANCE: 100MΩ MIN.

- 5-4. DIELECTRIC WITHSTANDING VOLTAGE:
100V AC FOR 1 MINUTE.

6. ENVIRONMENTAL PERFORMANCE:

- OPERATING TEMPERATURE: -20°C ~ +85°C.

7. RECOMMENDED PROCESS:

THE PEAK TEMPERATURE ON THE BOARD
SHALL MAINTAIN 10±1 SECONDS AT 255±5°C.




深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15

X.X' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

CHECKED BY :

马跃

DATE :

2014-02-23

APPROVED BY :

邱敏

DATE :

2014-02-23

PART NAME:

USB TYPE C 防水母座16P 沉板1.13 带防水胶圈

PART NO.

HYC592-USBC16-113

MOLD NO.

DRAW NO:

HYC-2411281512

SHEET NO.

1 OF 1