

此处点胶

NOTES:
SPECIFICATION:


1. CURRENT RATING: 3.0A MAX
2. VOLTAGE: 5 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: 10,000 CYCLES
9. WATER PROOFNESS: THIS PRODUCT IS BASED ON IPX8

6	防水圈	硅胶	BLACK	1PCS
5	SHELL	STAINLESS STEEL	NI Plated	1PCS
4	SHIELDING PLATE	STAINLESS STEEL	NI Plated	1PCS
3	CONTACT	COPPER ALLOY	TIN/Au3U/NI Plated	1SET
2	护套	PA46	BLACK	1PCS
1	HOUSING	LCP	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X.' ±2" X.X" ±0.5"

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

USB TYPE C 防水母座6P 沉板0.55

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC402-USBC06-055

MOLD NO.

APPROVED BY:

邱敏

DATE :

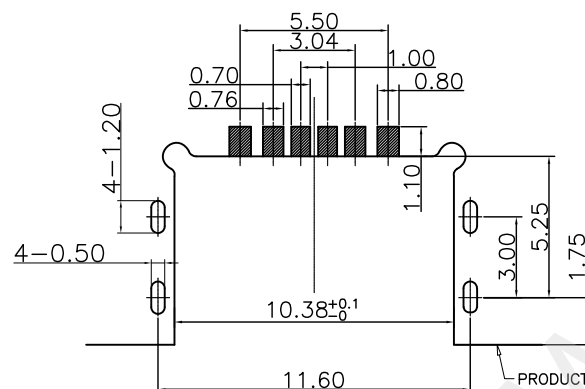
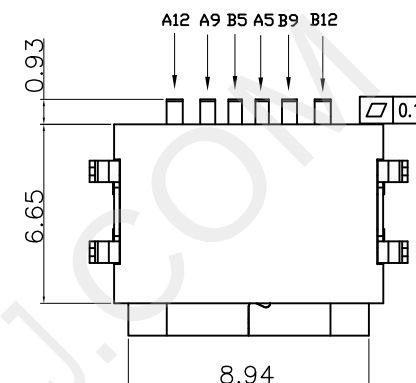
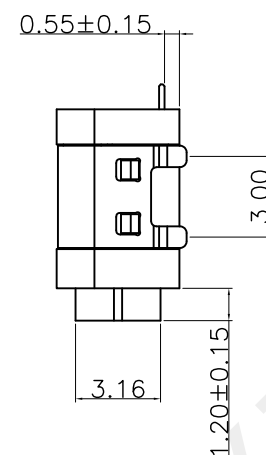
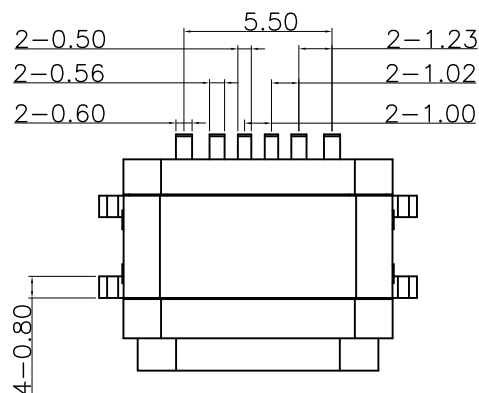


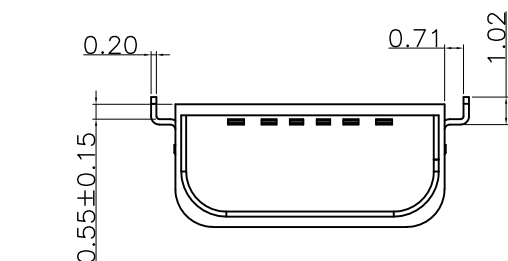
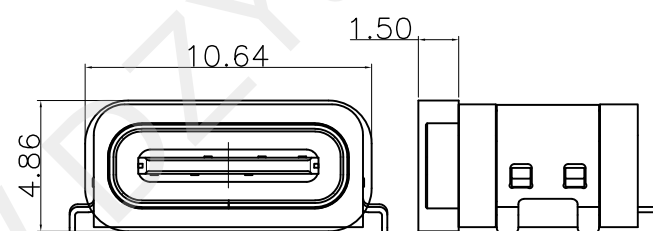
2014-02-23

DRAW NO:

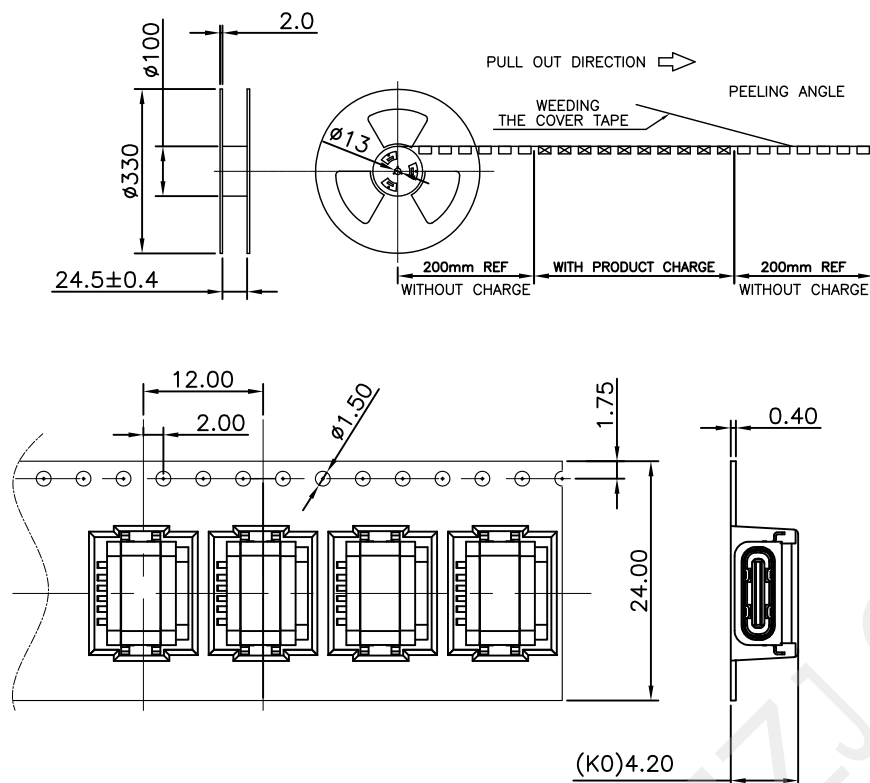
HYC-2212131452

SHEET NO.

1 OF 1

RECOMMEND P.C.B LAYOUT (COMPONENT SIDE)
TOLERANCE FOR PCB LAYOUT IS ±0.05

加防水圈示意图



注意:

1. 材料:

纸箱:纤维板,瓦楞,双层壁。

胶带:聚苯乙烯,耐热温度:120℃,白。

卷筒:聚苯乙烯,耐热温度:70℃,蓝色。

包装:聚乙烯,耐热温度:100℃。

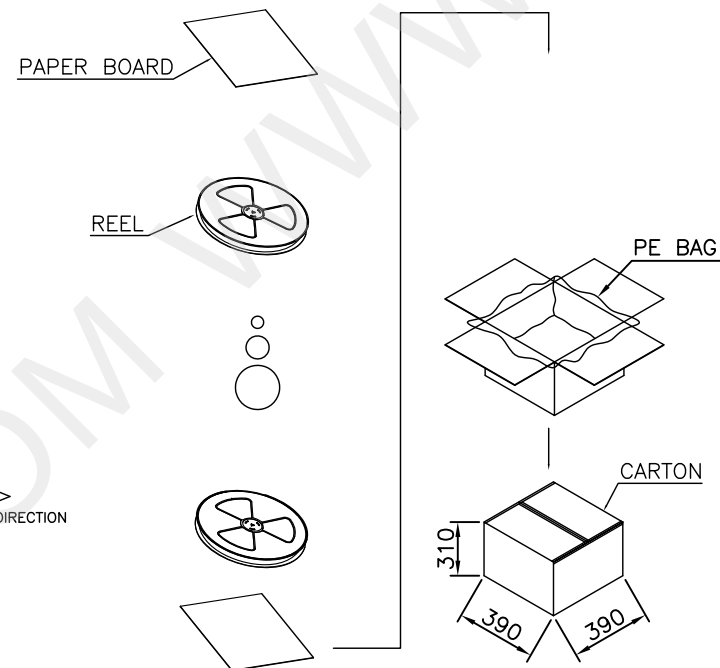
2. 剥离强度:0.1 ~ 1.3 N(10 ~ 130克)


3. 脱皮速度:300mm /min。

4. 每个袋子都应包括干燥剂*1。

5. 外箱上贴号物料标签及RoHS标签

6. 同一产品只能装同一纸箱,不允其它产品;



 深圳市华宇创精密电子有限公司					
TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X." ±2" X." ±0.5"		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图	
		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:		
			SHEET NO. 1 OF 1		