


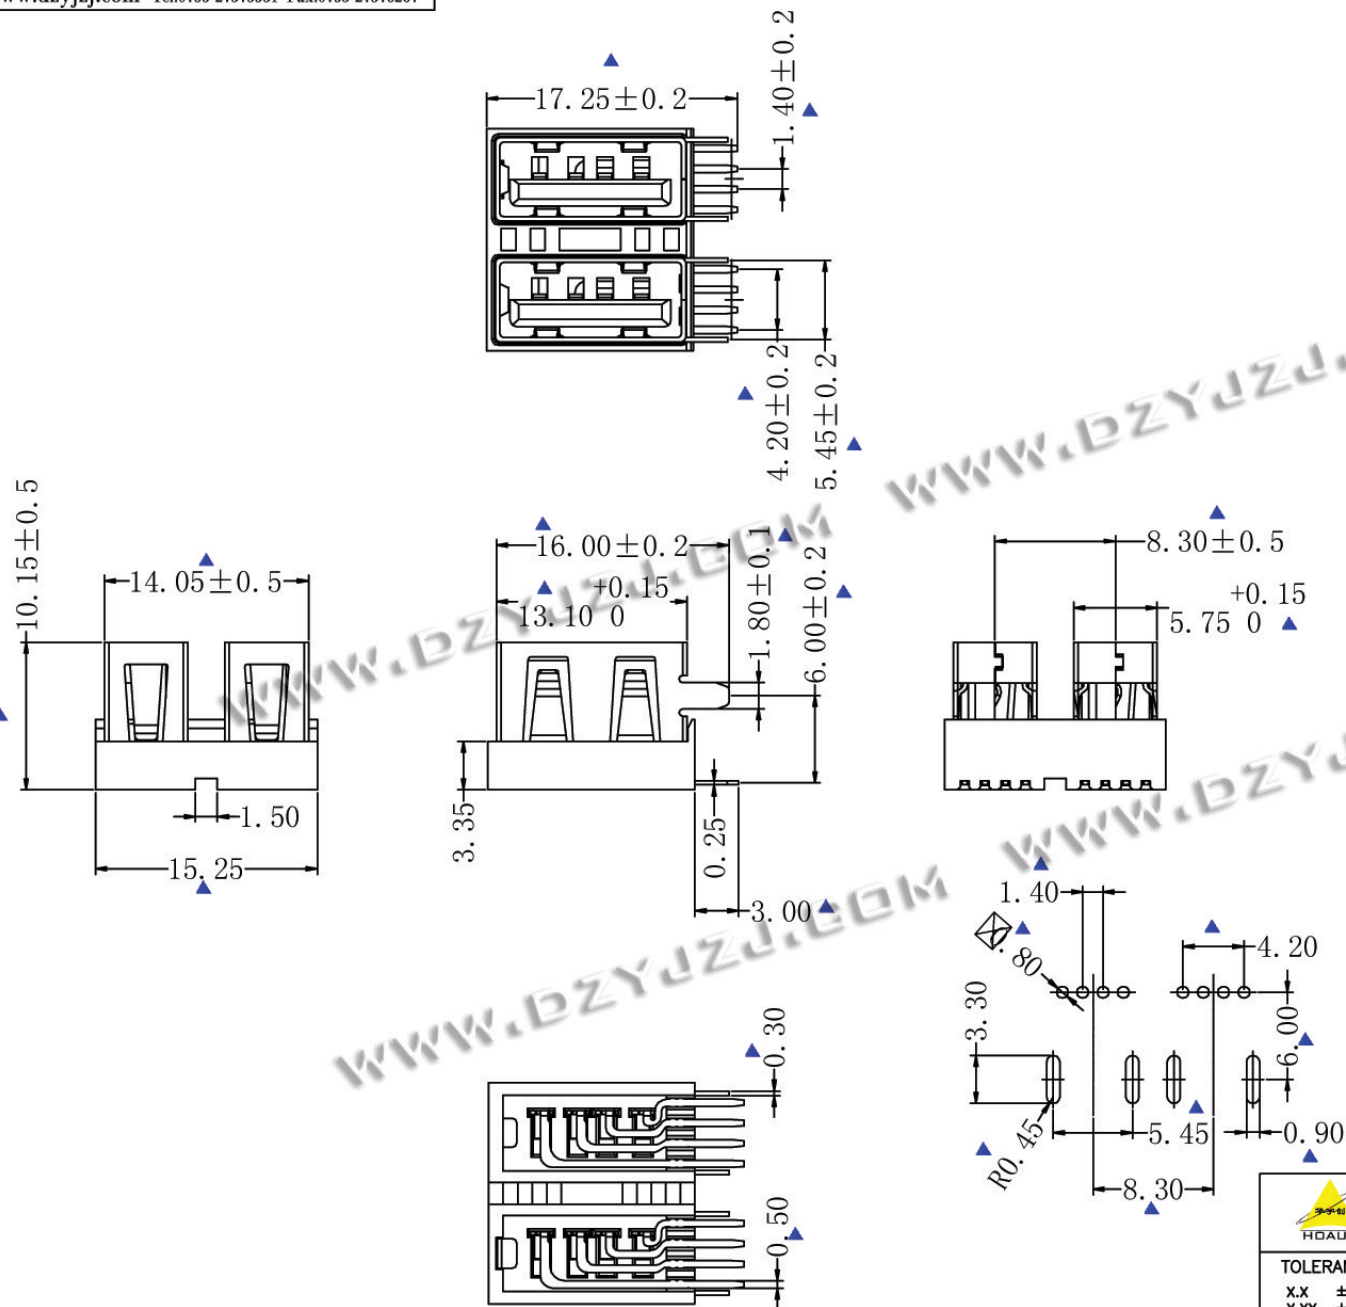

产品规格说明: (specifications)

电气特性: (Electrical characteristics)

1. 接触阻抗: (Contact Resistance)

最大值30毫欧: (30 milliohms MAX)

2. 耐电压: (Dielectric Withstanding Voltage:)

500 伏特交流电 (500V AC AT Sea Level)

3. 绝缘阻抗: (Insulation Resistance:)

最小值1000兆欧姆 (1000 mega-ohms MIN)

机械性能: (Mechanical:)

1. 插入力: (Insertion Force)

最大3.57kg (3.57kg MAX)

2. 拔出力: (Unmating Force:)

最少1.02kg (1.02 kg MIN)

材料: Material:

1. 塑胶: (Housing): PBT白色

2. 端子: (Contact): T0.25 C2680

3. 外壳: (Shell): T0.3 SPCC

电镀: (Finish):

1. 端子(Contact): Au Plated ON Contact Area Over

60~80U Ni, Sn Plated On Solder Tails.

接触点镀金1u'' 脚镀锡。

2. 外壳: (Shell): Nickel Plating 镀亮镍100u''

注明: 1. 标示 "▲" 为IPQC重点检测尺寸。

2. 所有物料均须符合RoHS标准。



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30

X.XX ±0.25

X.XXX ±0.15

X' ±2° X.X' ±0.5°

UNIT: mm [inch]

SCALE: 1:1

SIZE: A4

DRAWN BY:

陈一鸣

DATE:

2014-02-23

PART NAME:

USB AF 侧插10.0双层

CHECKED BY:

马跃

DATE:

2014-02-23

PART NO.

HYC13-USBA08-100

APPROVED BY:

邱国夷

DATE:

2014-02-23

DRAW NO:

HYC-USB16042010

SHEET NO.

1 OF 1