

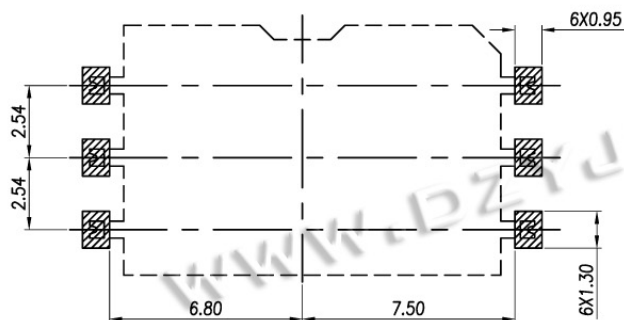
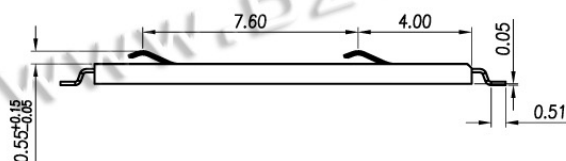


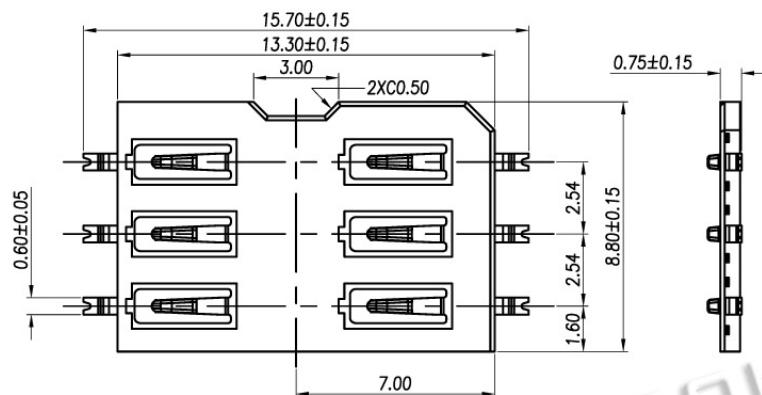

RECOMMENDED PCB LAYOUT
GENERAL TOLERANCE ± 0.05

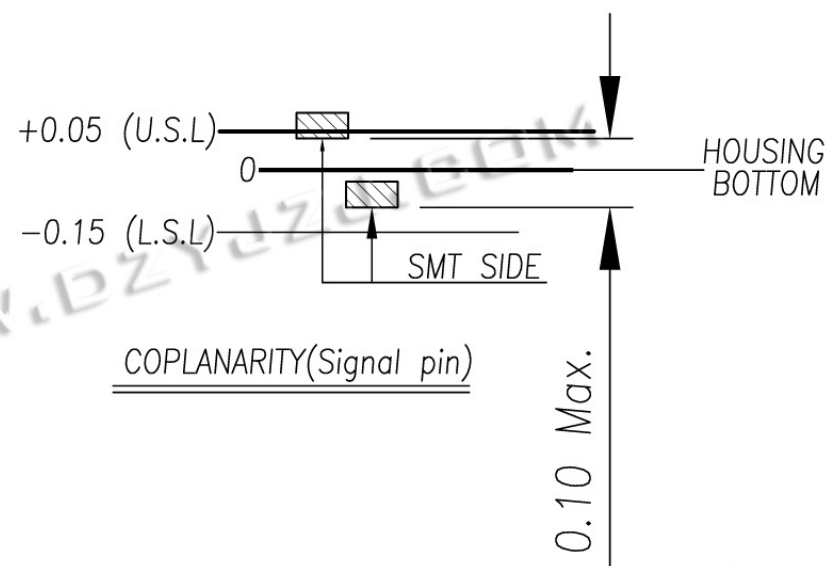

NOTES:

1) MATERIAL:

1-1 HOUSING:THERMOPLASTIC,UL 94V-0,COLOR:BLACK

1-2 CONTACT:COPPER ALLOY, T=0.12mm

2) FINISH:

2-1 CONTACT:GOLD PLATING ON CONTACT AREA(SEE P/N DESCRIPTION)

100u"MIN MATTE Sn PLATING OR 1u" MIN Au PLATING ON SOLD AREA,

50u" MIN NICKEL UNDERPLATING OVER ALL

3) PRODUCT SPECIFICATIONS:

3-1 VOLTAGE RATING: 50V

3-2 CURRENT RATING: 1.0A

3-3 INSULATION RESISTANCE: 1000MEG.OHM MIN

3-4 CONTACT RESISTANCE: 50 MILL.OHM MAX


3-5 OPERATION TEMPERATURE: -20° TO +85°

3-6 DURABILITY: 3000 CYCLES



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X' $\pm 2^\circ$ X.X' $\pm 0.5^\circ$ 

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

简易SIM 超薄0.7H

CHECKED BY:

马跃

DATE :

2014-02-23

APPROVED BY:

邱国夷

DATE :

2014-02-23

PART NO.

HYC04-SIM06-070


MOLD NO.

DRAW NO:

HYC-SIM17091911

SHEET NO.

1 OF 1

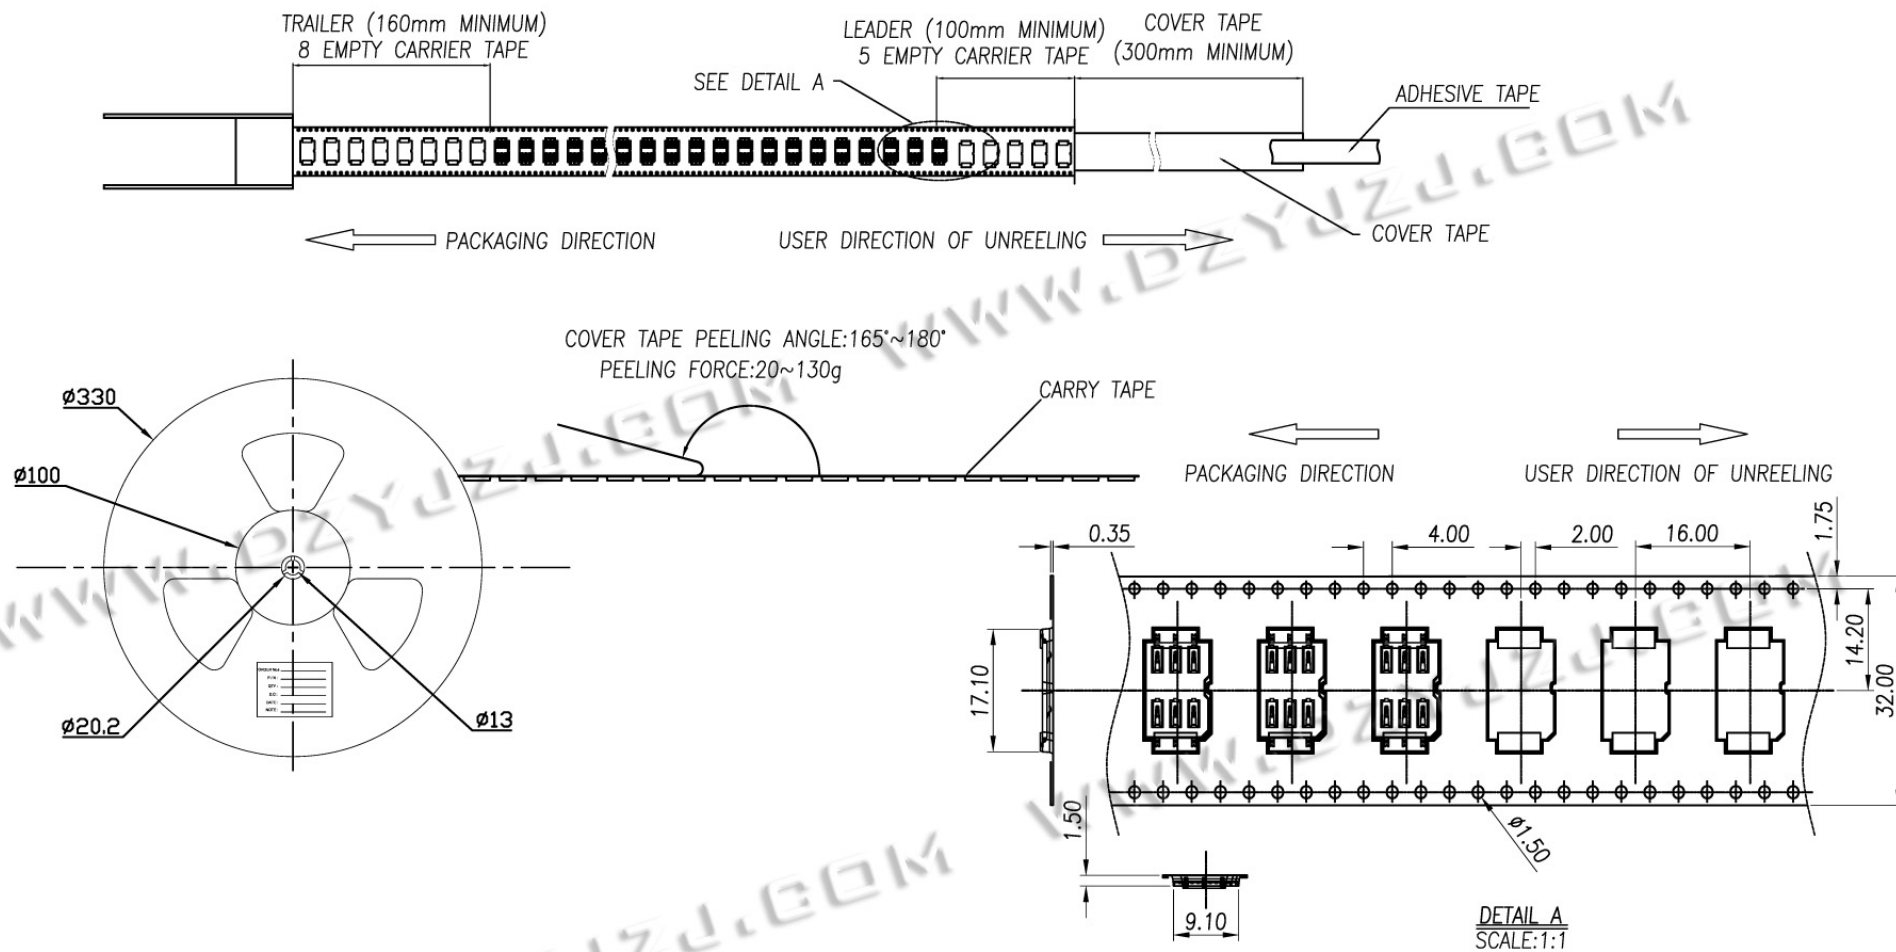

1	HYC04-SIM06-070	2000	8	N/A	16000	350X350X335
ITEM	PRODUCT NO.	Q'TY/REEL	REEL/CARTON	Kg/CARTON	Q'TY/CARTON	CARTON SIZE

 深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ± 0.30 X.XX ± 0.25 X.XXX ± 0.15 X* $\pm 2^{\circ}$ X.X* $\pm 0.5^{\circ}$	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.
			MOLD NO.
 UNIT: mm [inch]	APPROVED BY: 邱国夷	DATE : 2014-02-23	DRAW NO:
	SCALE: 1:1	SIZE: A4	SHEET NO. 1 OF 1