


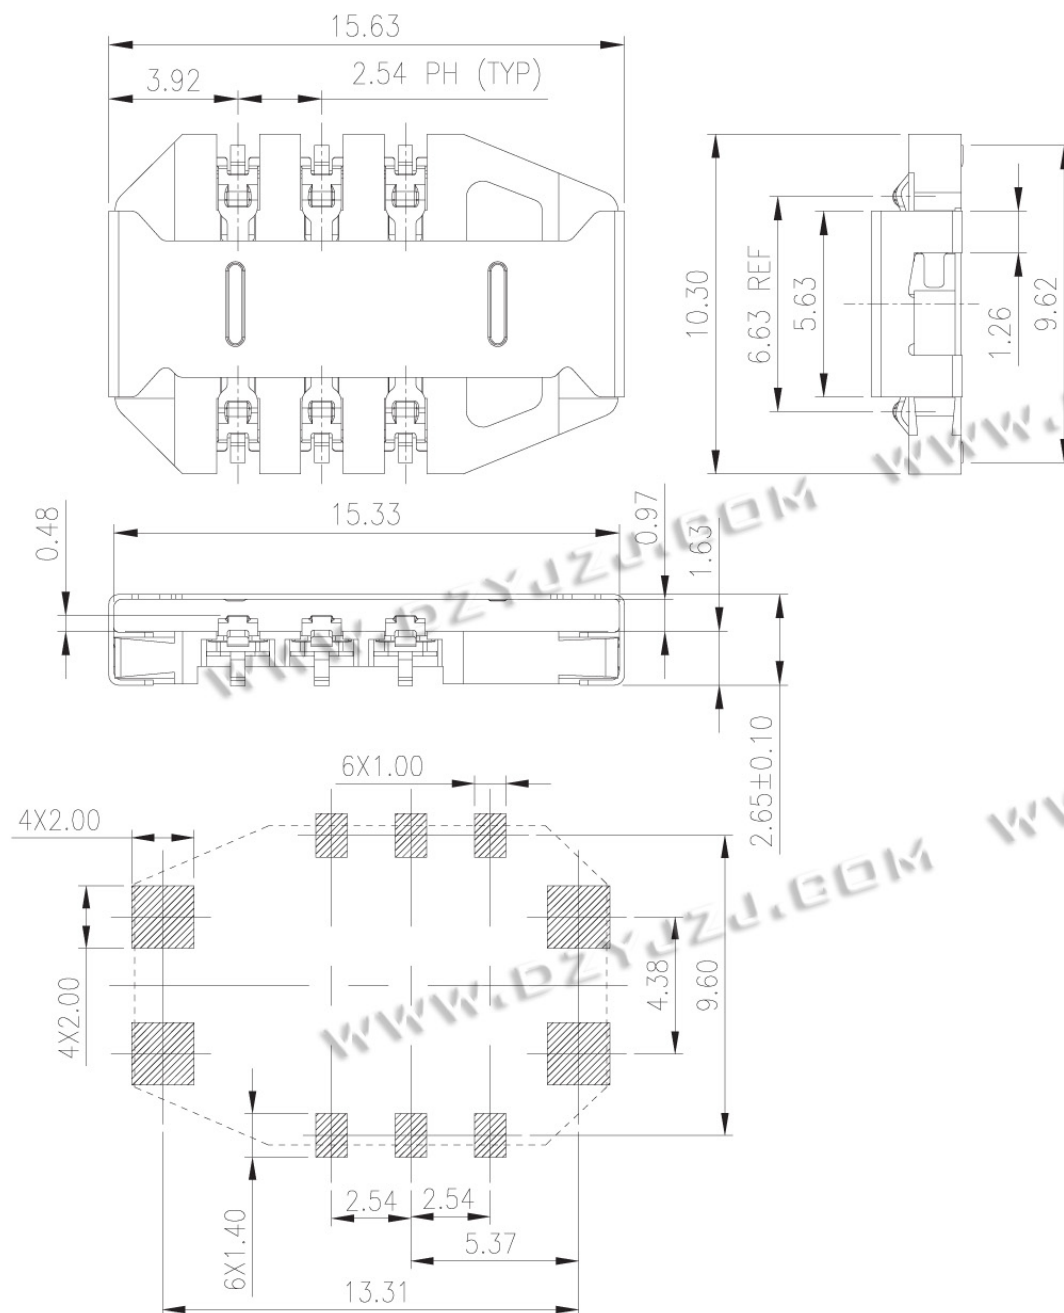

NOTE:

1.MATERIAL:

- A. HOUSING: LCP, UL 94-V0 COLOR: BLACK
B.CONTACT: PHOSPHOR BRONZE C5210H t=0.15
C.SHELL: STAINLESS STEEL, t=0.15
2. PLATING: Underplate: 70u" Nickel
Contact area: 3u" Gold
Solder tails area:1u" Gold

3.Electrical characteristics:

- A. Operating voltage: 250V(AC/DC).
B. Current rating: 1AMP MAX
C. Operating temperature:-20°C~+85°C.
D. Insulation resistance: 1000M ohme min. at 250VDC.
E. Dielectric withstanding voltage: 500 VAC/1minute.
F. Contact resistance:40m ohme max.



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2* X.X* ±0.5*	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 菱形SIM卡座2.7H
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC122-SIM06-270
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱国夷	DATE : 2014-02-23	MOLD NO.
			DRAW NO: HYC-SIM16071910
			SHEET NO. 1 OF 1

Recommended PCB Layout
(PCB所有尺寸公差为±0.05)