


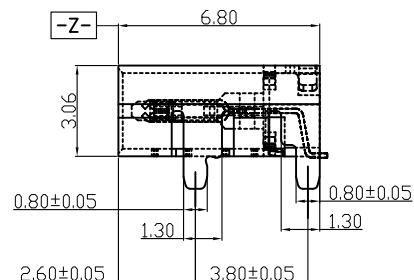
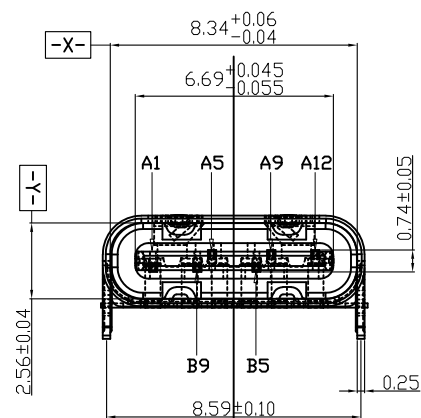


NOTES:
SPECIFICATION:

1. CURRENT RATING: 3~5A MAX
2. VOLTAGE: 100 VAC
3. TEMPERATURE RANGE: -30 °C ~ 85 °C
4. CONTACT RESISTANCE: 40 MILLIONHM MAX
5. INSULATION RESISTANCE: 100 MEGOHMS MIN
6. INSERTION FORCE : 5N~20N
7. UNMATING FORCE: 8N~20N
8. DURABILITY: **5000** CYCLES

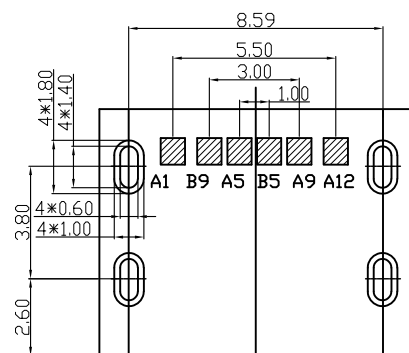

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED ±0.05mm

PIN ASSIGNMENTS

A5	CC1	B12	GND
A9	VBUS	B9	VBUS
A12	GND	B5	CC1
PIN	SIGNAL NAME	PIN	SIGNAL NAME

4				1PCS
3	SHELL	STAINLESS STEEL	Ni Plated	1SET
2	CONTACT	COPPER ALLOY	Ni Plated	1SET
1	HOUSING-MD	HIGH TEMPERATURE PLASTIC	LCP - BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS SUS201/SPCC	QTY



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.* ±2' X.X" ±0.5"		DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 母座6P 板上SMT L=6.8 1.0脚	
 UNIT: mm [inch] SCALE:1:1 SIZE: A4		CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HYC629-USBC06-680-X	
		APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
				DRAW NO: HYC-2512311520	
				SHEET NO. 1 OF 1	