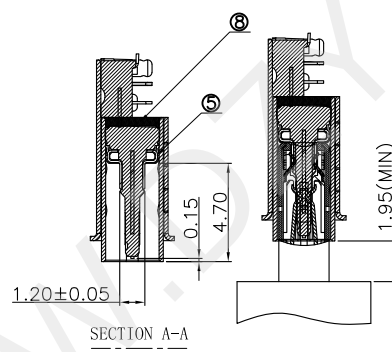
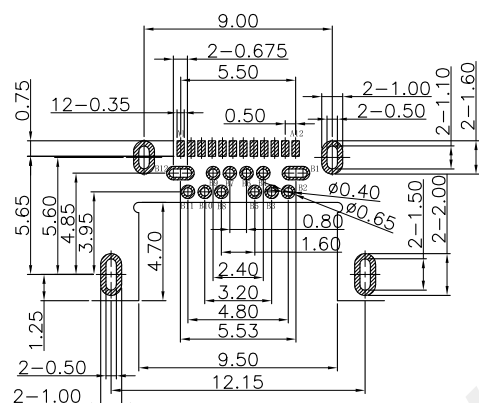
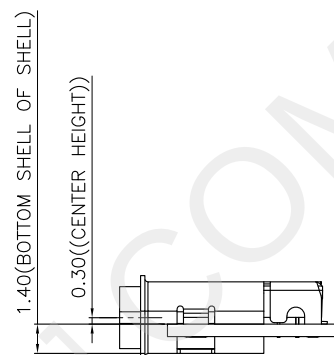

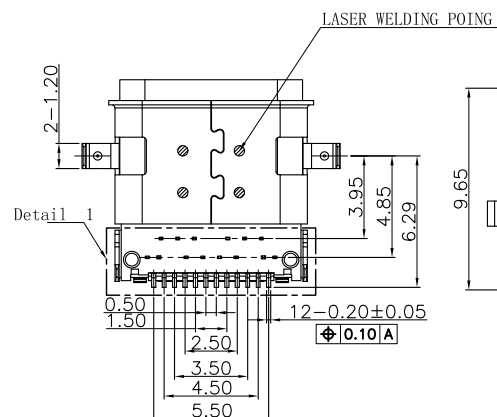
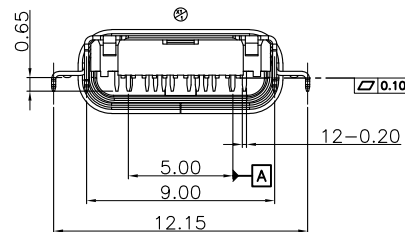
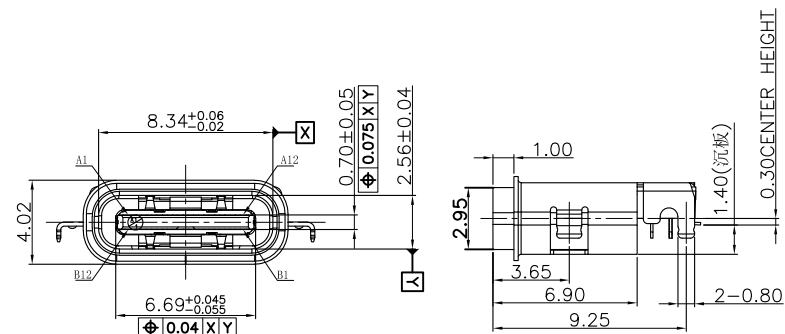


NOTES:

1. MATERIAL: SEE "TABLE 1";

2. FINISH: SEE "TABLE 1";

3. ELECTRICAL :

3-1. CONTACT CURRENT RATING :

5A (VBUS PIN 1.5A/PIN),

5A (GND PIN 1.25A/PIN MAX), 0.25A/PIN (OTHER PIN).

3-2. INSULATION RESISTANCE :

100 MEGAOHMS MIN. AT 250VDC.

3-3. DIELECTRIC WITHSTANDING VOLTAGE :

100VAC MIN.

3-4. LOW LEVEL CONTACT RESISTANCE :

INITIAL 40mΩ MAX.

AFTER 50mΩ MAX.

4. MECHANICAL CHARACTERISTICS :

4-1. MATING FORCE: 5~20N.

4-2. UNMATING FORCE: 8~20N (INITIAL), 6~20N (AFTER 10000 CYCLES);

4-3. DURABILITY : 10,000 MATING CYCLES.

4-4. OPERATING TEMPERATURE : -40°C TO +80°C

TABLE 1:

⑧	GLUE WATER	1	EPOXY	BLACK;	
⑦	Shell-2	1	Stainless steel	NI PLATING;	T=0.20mm
⑥	Shell-1	1	Stainless steel	NI PLATING;	T=0.20mm
⑤	GND PLATE	1	Stainless steel	NI PLATING;	T=0.10mm
④	MID PLATE	1	Stainless steel		T=0.15mm
③	Terminal-B	12	铜镍硅合金	Au:15u" PLATING;	T=0.12mm
②	Terminal-A	12		Au:15u" PLATING;	T=0.12mm
①	Housing	1	HIGH TEMP	Black	
NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK



深圳市华宇创精密电子有限公司

TOLERANCE:

X.X $\pm$ 0.30X.XX $\pm$ 0.25X.XXX $\pm$ 0.15X' $\pm$ 2" X.X' $\pm$ 0.5"

UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

USB TYPE C 防水母座24P 沉板1.4 DIP+SMT

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC662-USBC24-140

APPROVED BY:

邱敏

DATE :

2014-02-23



DRAW NO:

HYC-2601051520


SHEET NO.

1 OF 1

建议密封方式

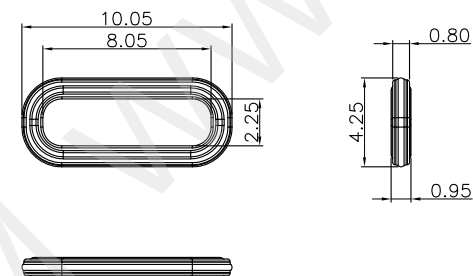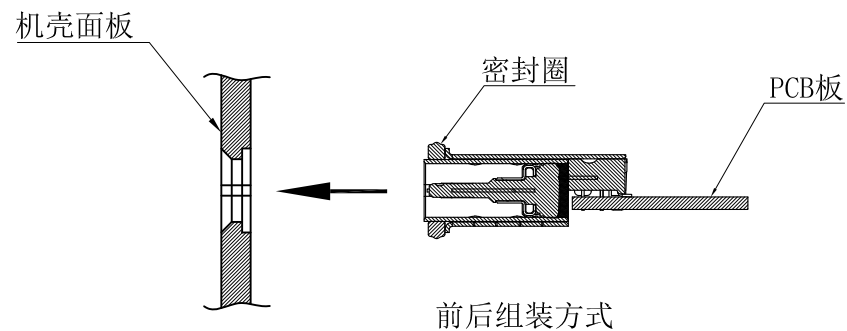

建议防水圈规格（材质硅橡胶）

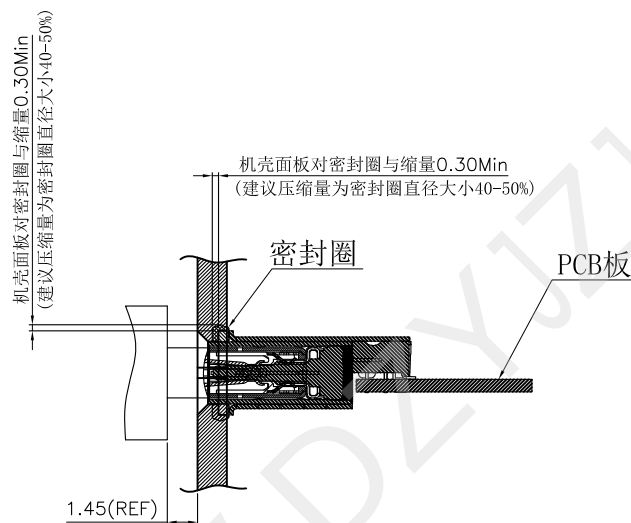

组装面板后公母头对插示意图



 深圳市华宇创精密电子有限公司			
TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: USB TYPE C 防水母座24P 沉板1.4 DIP+SMT
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. HVC662-USBC24-140
 UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: HVC-2601051520
			SHEET NO. 1 OF 1