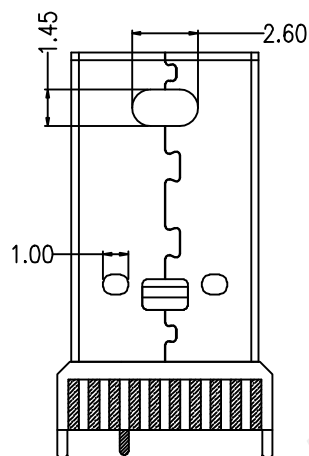
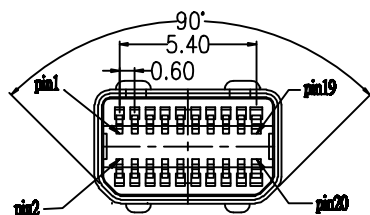
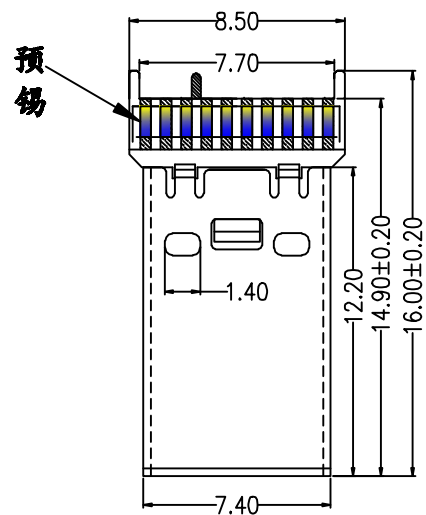
**Notes:****1. 材质:**

- 1.1. 壳体: 材质SPCC, T=0.3mm 镀锌 .
- 1.2. 端子: 材质铜合金, 焊脚镀锡, 接触点镀金6"/".
- 1.3. 塑胶主体: 材质LCP UL 94V-0 本色.

2. Electrical Specifying

- 2.1 Operation Voltage: 30 VAC max.
- 2.2 Current Rating : 0.5 Ampere Per contact.
- 2.3 Contact Resistance : 60 Milliohms Max.
- 2.4 Insulation Resistance : 100 Megohms Min.
- 2.5 Dielectric Withstanding Voltage: 500v AC Min.

3. Mechanical

- 3.1 Insertion Force : 4.5Kg/f max.
- 3.1 Withdrawal Force: 1.0~4.0Kg/f.
- 3.2 Durability: 10,000 Cycles

4. Environmental

Operating Temperature: -40°C to +85°C

How to Order



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MINI DP 公头焊线式	
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO.	HYC11-MDP20-160
 UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO.	
			DRAW NO:	HYC-2601071147
			SHEET NO.	1 OF 1