
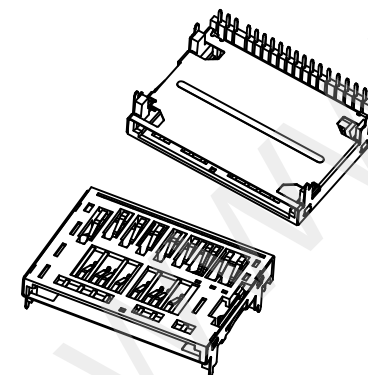
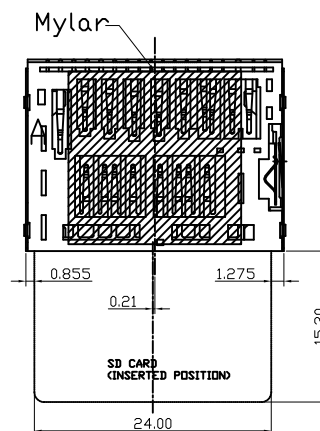



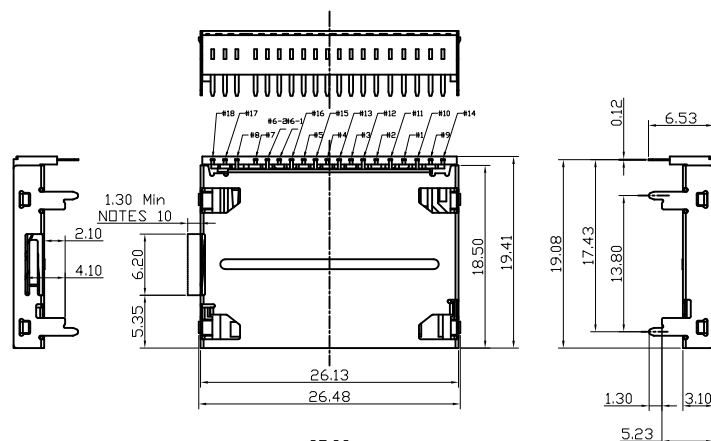


NO.	SD NAME	USH-LL NAME
1	DAT3	
2	CMD	
3	VSS1	VSS
4	VDD	VDD1
5	CLK	
6-1	CD	
6-2	VSS2	VSS2
7	DAT0	RCLK+
8	DAT1	RCLK-
9	DAT2	
10		VSS3
11		DO+
12		DO-
13		VSS4
14		VDD2
15		D1-
16		D1+
17		VSS5
18	W/P	
19	GND	


	WRITE PROTECT SWITCH		CARD DETECT SWITCH
	WRITE PROTECT POSITION	WRITE ENABLE POSITION	
CARD UN INSERTION	OPEN		OPEN
CARD INSERTION	OPEN	CLOSE	CLOSE

NOTE:

- NOTE:
- 1. MATERIAL:
 - 1-1 PLASTICS: LCP E4711 WITH 30% GF, UL94V-0, BLACK, HF
 - 1-2 CONTACTS: C5210-EH THICKNESS=0.15±0.02
 - 1-3 SHELL: SUS301-3/4H THICKNESS=0.15±0.02
 - 2. PLATING:
 - 2-1 CONTACTS:
 - 2-1-1 CONTACT AREA: (1u")MIN Gold PLATING ON CONTACT AREA PLATING OVER NI 50u" MIN
 - 2-1-2 SOLDER TALL AREA: MATTE-TIN 80u" MIN PLATING OVER NI 50u" MIN
 - 2-2 SHELL:
 - 2-2-1 1u" MIN GOLD PLATED ON SOLDER TALLS 50u" MIN. NICKEL UNDERPLATING OVER ALL

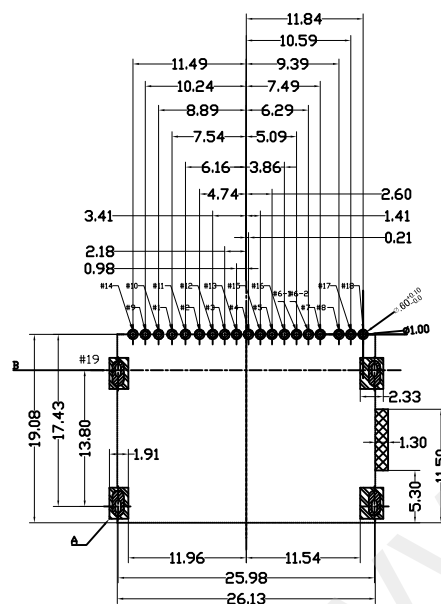


DETAIL A SCALE 4:1



DETAIL B SCALE 4:1

NOTES:



PAD AREA

CONNECTOR OUT LINE AREA

THIS AREA CORRESPONDS TO THE HEIGHT OF THE
CONN. BODY, PLEASE KEEP OUT

NO COMPONENT AREA



WITHOUT CARD



CARD INSERTED
WRITE PROJECT




CARD INSERTED
WRITE PROJECT:UNLOCK



深圳市华宇创精密电子有限公司

TOLERANCE:		DRAWN BY :	DATE :	PART NAME:	
X.X ±0.30		陈一鸣	2014-02-23	SD 4.0 NO PUSH DIP 板下型 5.23H 垫高2.	
X.XX ±0.25					
X.XXX ±0.15					
X.* ±2* X.X* ±0.5*		CHECKED BY:	DATE :	PART NO.	HYC112-SD19-523
		马跃	2014-02-23	MOLD NO.	
UNIT: mm [inch]		APPROVED BY:	DATE :	DRAW NO:	HYC-2601191118
SCALE:1:1	SIZE: A4	邱敏	2014-02-23	SHEET NO.	

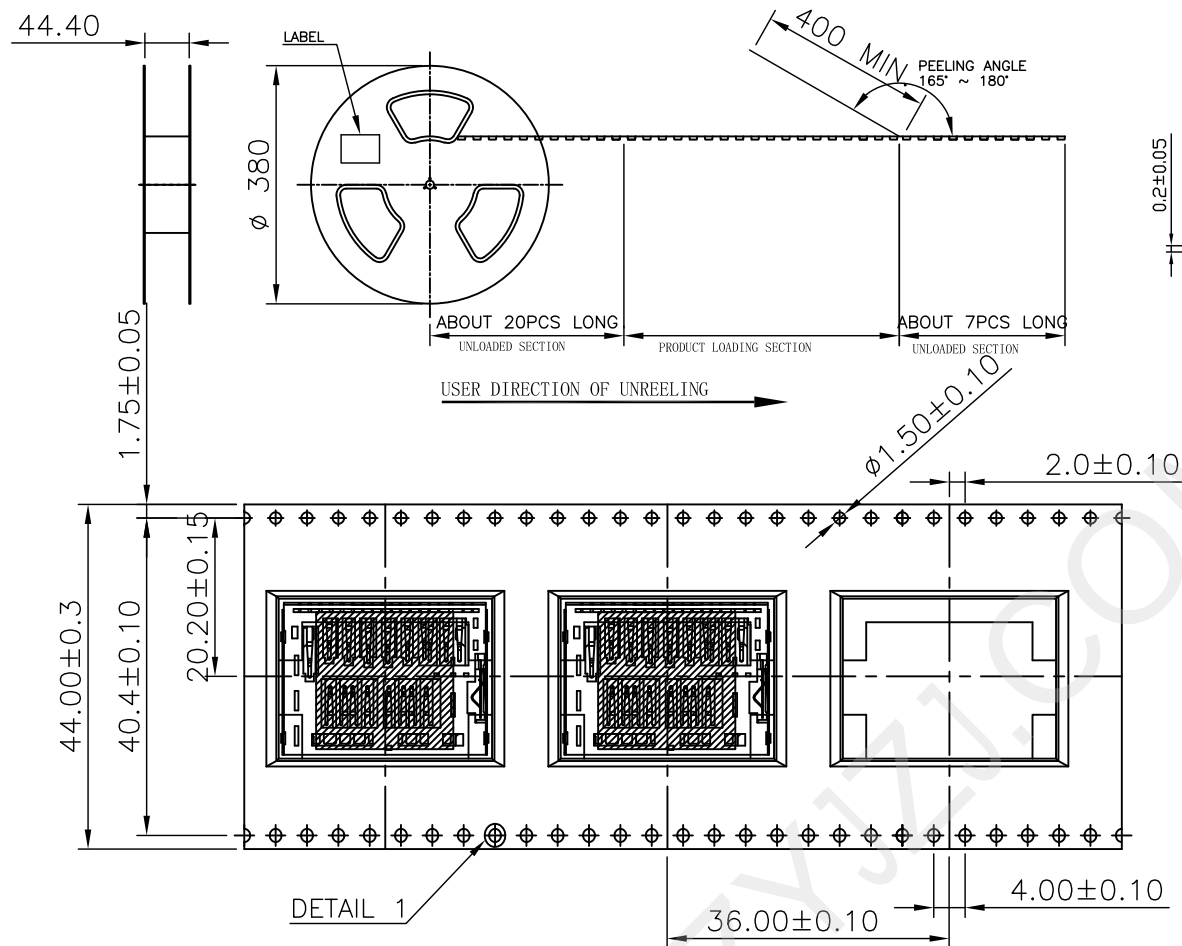

NOTE:

1. MATERIAL:

BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.

COVER TAPE: PET, HEAT-RESISTANT TEMPERATURE: 100°C, TRANSPARENT COLOR.

CARRIER TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.


REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.

BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.

2. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)

3. PEELING SPEED: 300 mm/min.

4. EACH BAG SHALL BE INCLUDED DESICCANT.

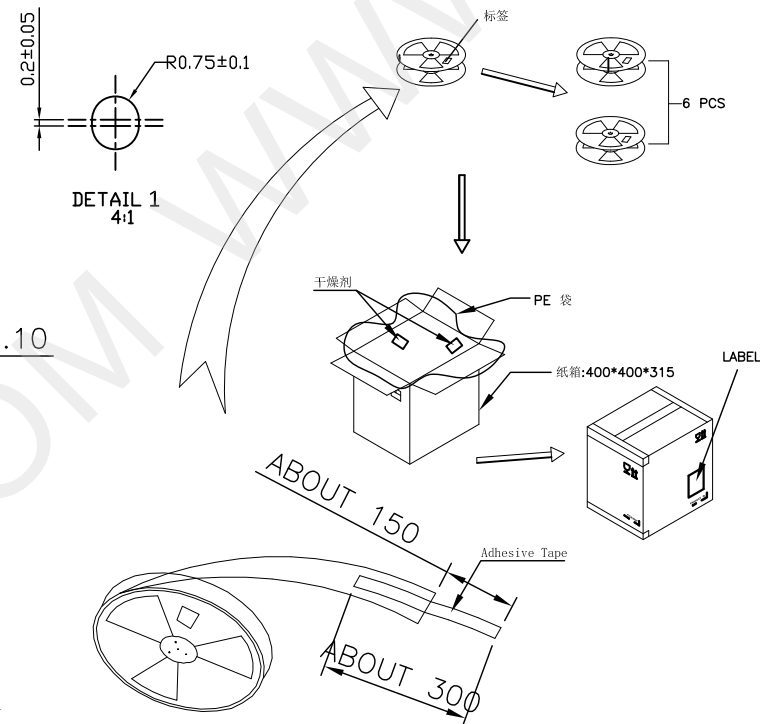

300	6	1800
PCS/ TAPE	REELS/ BOX	QUANTITY



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2" X.X' ±0.5"	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: 包装图
UNIT: mm [inch] SCALE:1:1 SIZE: A4	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. MOLD NO.
	APPROVED BY: 邱敏	DATE : 2014-02-23	DRAW NO: SHEET NO. 1 OF 1