
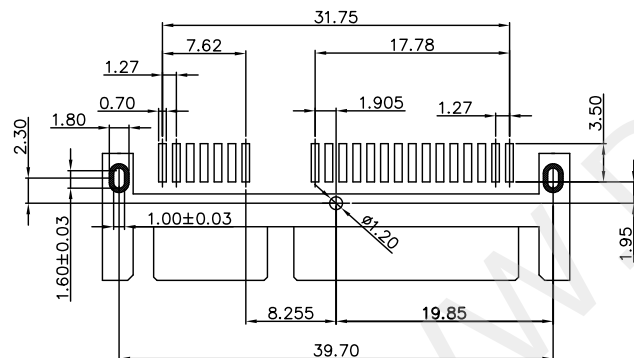

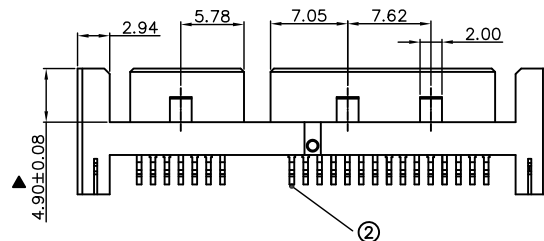

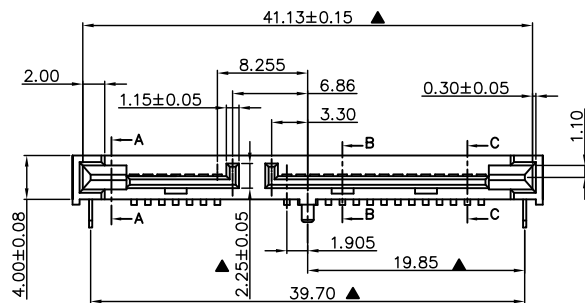




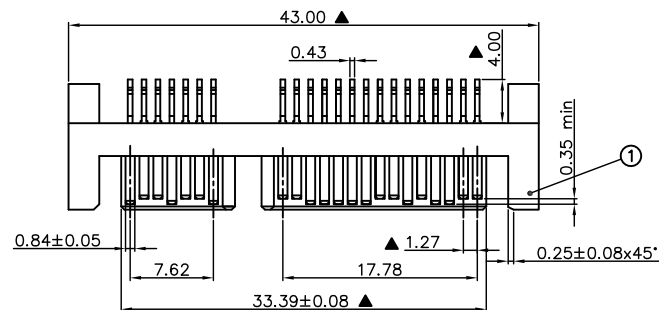

PCB LAYOUT
RECOMMENDED PCB TOLERANCE:±0.05

SPECIFICATION:

1.MATERIAL:

HOUSING:LCP E130i 30% G/F UL 94V-0

COLOR:BLACK

CONTACT:BRASS C2680R EH,T=0.25mm

Peg:BRASS C2680R EH,T=0.30mm

2.FINISH:

CONTACT: 1u",3u",5u",15u" GOLD PLATING ON CONTACT AREA

100u" TIN PLATING ON SOLDER TAILS

30u" NICKEL UNDERPLATING OVER ALL

Peg:100u" TIN PLATING ON SOLDER TAILS

30u" NICKEL UNDERPLATING OVER ALL

3.ELECTRICAL

CURRENT RATING: 1.5A PER PIN MIN.

CONTACT RESISTANCE: 30m OHM MAX.

INSULATION RESISTANCE: 1000M OHM MIN.

DIELECTRIC WITHSTANDING VOLTAGE: 500VAC.

3	Peg	Brass C2680		Tin/Ni Plated
2	Terminal	Brass C2680		Gold/Tin Plated
1	Housing	High Temp	Black	UL 94V-0
NO.	DESCRIPTION	MATERIAL	COLOR	REMARK



深圳市华宇创精密电子有限公司

TOLERANCE:

XX ±0.30

XX ±0.25

XXX ±0.15

X° ±2° X.X° ±0.5°

UNIT: mm [inch]

SCALE:1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

SATA 7+15P公座板上SMT型双鱼叉带柱

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HVC149-SATA22-397

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HVC-2601231034

SHEET NO.

1 OF 1