
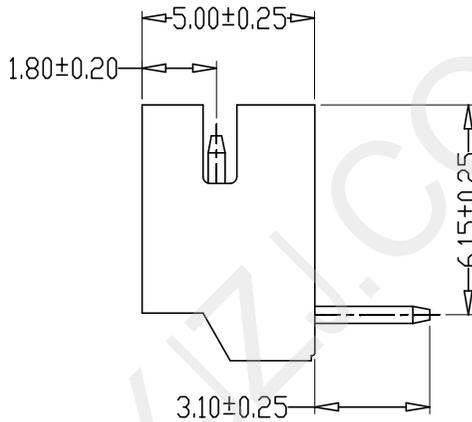


TYPE 2


SPECIFICATIONS

- 1、Current Rating: 2A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperature Range: -25°C ~ +85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltage: 800V AC/minute
- 7、Material: Wafer Nylon66, UL94V-0
PIN Brass Tin-plated

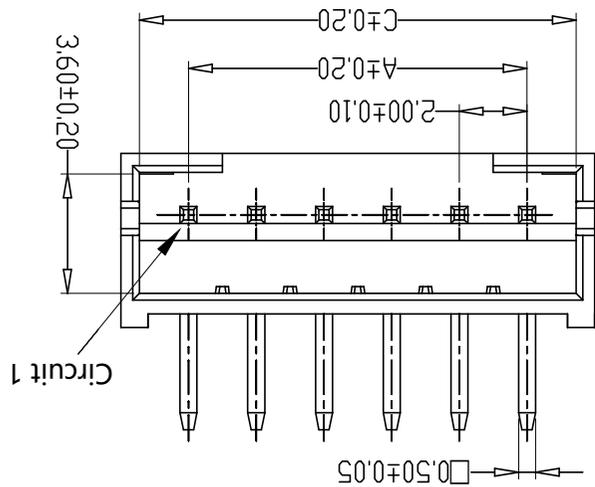

TYPE 1

PIN	尺寸 (mm)		
	A	B	C
02AWD	2.00	6.00	5.00
03AWD	4.00	8.00	7.00
04AWD	6.00	10.00	9.00
05AWD	8.00	12.00	11.00
06AWD	10.00	14.00	13.00
07AWD	12.00	16.00	15.00
08AWD	14.00	18.00	17.00
09AWD	16.00	20.00	19.00
10AWD	18.00	22.00	21.00
11AWD	20.00	24.00	23.00
12AWD	22.00	26.00	25.00
13AWD	24.00	28.00	27.00
14AWD	26.00	30.00	29.00
15AWD	28.00	32.00	31.00
16AWD	30.00	34.00	33.00

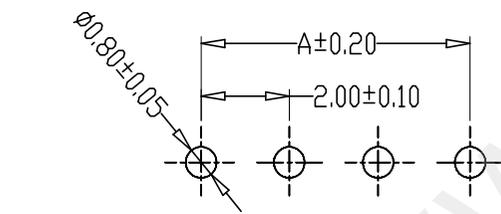

PCB LAYOUT



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: PH 定位弯针	
	CHECKED BY : 马跃	DATE : 2014-02-23	PART NO. HYC15-NAWD-200	MOLD NO.
UNIT: mm [inch] SCALE:1:1 SIZE: A4	APPROVED BY : 邱敏	DATE : 2014-02-23	DRAW NO.: HYC-2601231436	SHEET NO.: 1 OF 1