




SPECIFICATIONS

- 1、Current Rating: 7A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltang: 1500V AC/minute
- 7、Material: Wafer PA66/PA46, UL94V-0
PIN Brass Tin-plated

物料名称	A	B	物料名称	A	B
VH-2A	3.96	7.88	VH-8A	27.72	31.64
VH-3A	7.92	11.84	VH-9A	31.68	35.60
VH-4A	11.88	15.80	VH-10A	35.65	39.56
VH-5A	15.84	19.76	VH-11A	39.60	43.52
VH-6A	19.80	23.72	VH-12A	43.56	47.48
VH-7A	23.76	27.68	VH-13A	47.52	51.44

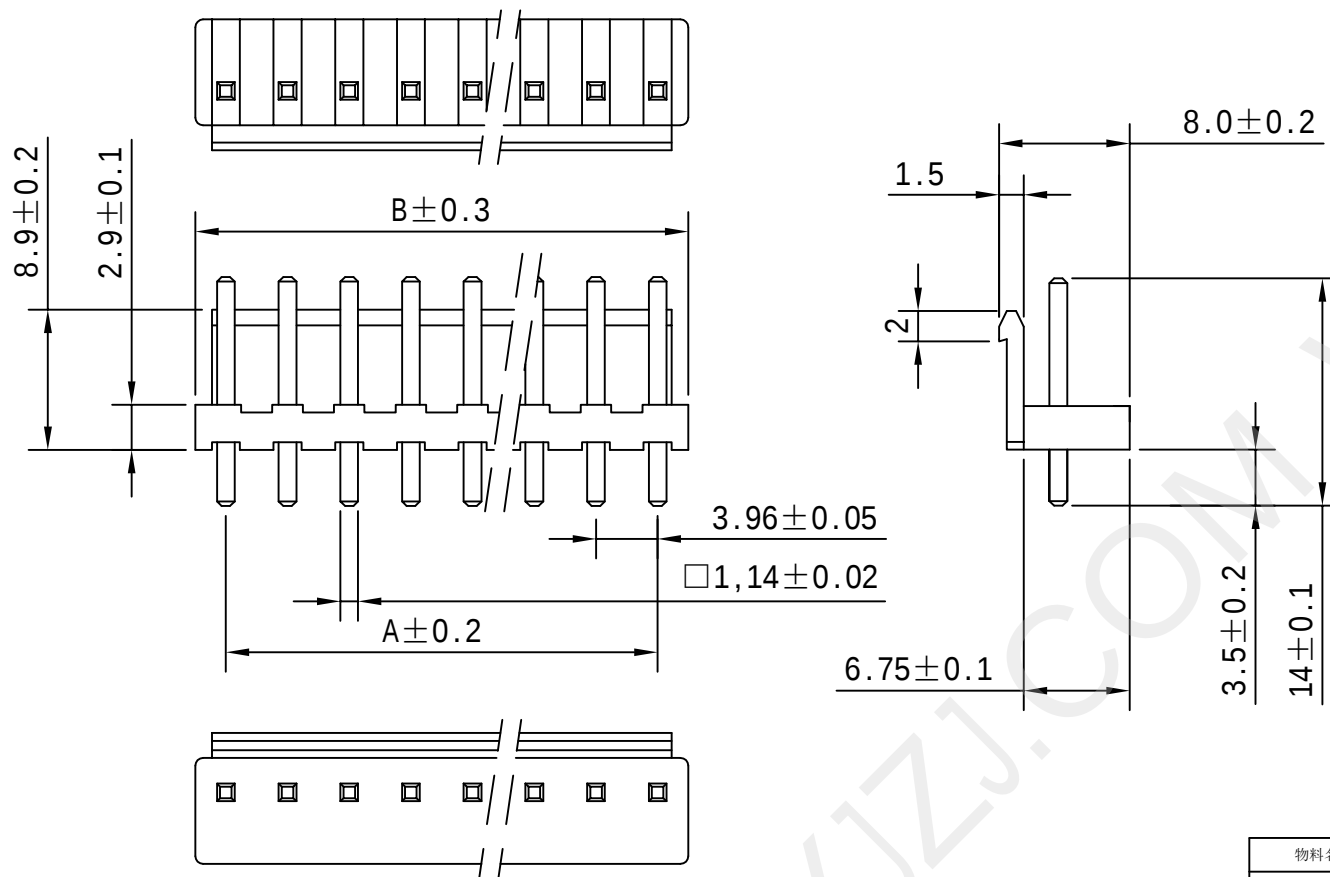

深圳市华宇创精密电子有限公司

TOLERANCE:

X.X ±0.30
X.XX ±0.25
X.XXX ±0.15
X.' ±2" X.X' ±0.5"



UNIT: mm [inch]

SCALE: 1:1 SIZE: A4

DRAWN BY :

陈一鸣

DATE :

2014-02-23

PART NAME:

VH 3.96 直针

CHECKED BY:

马跃

DATE :

2014-02-23

PART NO.

HYC280-NA-396

MOLD NO.

APPROVED BY:

邱敏

DATE :

2014-02-23

DRAW NO:

HYC-2505191523

SHEET NO.

1 OF 1

PCB LAYOUT