



USB CABLE  
0.80 REF




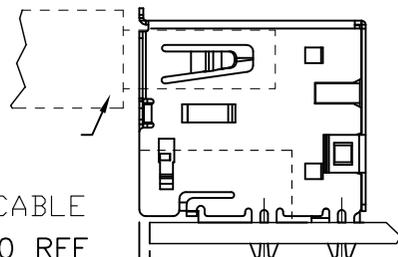


MOUTING CONFIGURATION



HIGE RISE USB3.1+USB TYPE C

X(颜色)
黑/black(B)
蓝/blue(BL)

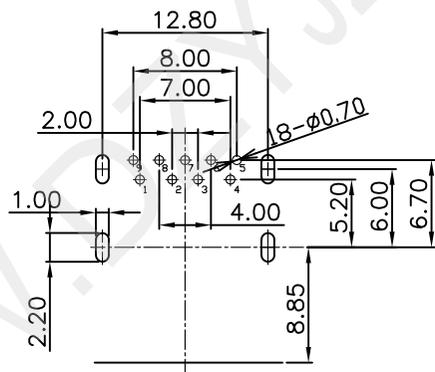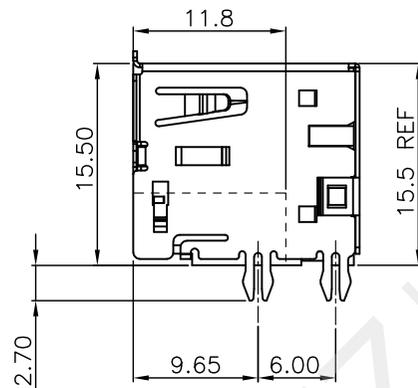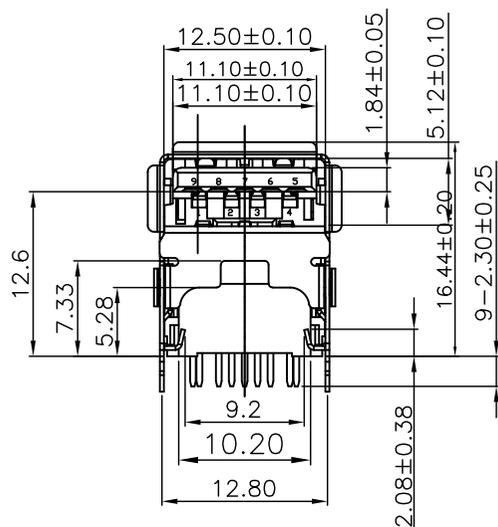

HIGE RISE USB3.1+USB TYPE C  
RECOMMENDED P.C.B LAYOUT(TOP VIEW)  
THICKNESS 1.60mm(TOLERANCE:±0.05)

NOTES:

- MATERIAL:  
HOUSING: PA9T COLOR: BLACK.  
COVER: PA9T COLOR: BLACK.  
CONTACT: C2680 T=0.20mm.  
SHELL: SUS304 T=0.25mm.  
MIDDLE SPRING: SUS304 T=0.20mm.
- FINISH:  
CONTACT: GOLD FLASH PLATED ON CONTACT AREA,  
80u" MATTE TIN PLATED ON SOLDER TAILS,  
30u" NICKEL UNDERPLATING OVER ALL.  
SHELL: 40u" NICKEL PLATING OVER ALL.
- SPECIFICATION:  
3.1: ELECTRICAL:  
CURRENT RATING: 1.8A FOR PIN1&PIN4;  
0.25A FOR OTHERS.  
VOLTAGE RATING: 30V.  
INSULATION RESISTANCE: 1000MQ Min.  
CONTACT RESISTANCE: 30 mΩ Max.  
DIELECTRIC WITHSTANDING VOLTAGE: 500V/AC  
1MINUTE.  
3.2: MECHANICAL:  
MATING FORCE: 3.57Kgf Max.  
UNMATING FORCE: 1.0Kgf Min.  
DURABILITY: 5000 CYCLES.

 <b>深圳市华宇创精密电子有限公司</b>			
<b>TOLERANCE:</b> X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X' ±2' X.X' ±0.5'	<b>DRAWN BY :</b> 陈一鸣	<b>DATE :</b> 2014-02-23	<b>PART NAME:</b> USB 3.0 (下TYPE C空位) 90度DIP卷边鱼叉脚
	<b>CHECKED BY:</b> 马跃	<b>DATE :</b> 2014-02-23	<b>PART NO.</b> HVC94-USBA09-155-X
  <b>UNIT: mm [inch]</b> <b>SCALE:1:1 SIZE: A4</b>	<b>APPROVED BY:</b> 邱国夷	<b>DATE :</b> 2014-02-23	<b>DRAW NO:</b> HVC-USB201104102
			<b>SHEET NO.</b> 1 OF 1