


适用FFC寸法
Applicable FFC

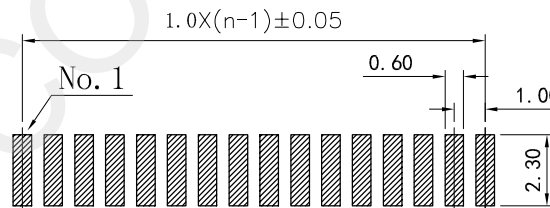

PCB 寸法
PCB Layout

TABLE :

N	A	B	C
4	3	5.1	6
5	4	6.1	7
6	5	7.1	8
7	6	8.1	9
8	7	9.1	10
9	8	10.1	11
10	9	11.1	12
11	10	12.1	13
12	11	13.1	14
13	12	14.1	15
14	13	15.1	16
15	14	16.1	17
16	15	17.1	18
17	16	18.1	19
18	17	19.1	20
19	18	20.1	21
20	19	21.1	22
21	20	22.1	23
22	21	23.1	24
23	22	24.1	25
24	23	25.1	26
25	24	26.1	27
26	25	27.1	28
27	26	28.1	29
28	27	29.1	30
29	30	30.1	31
30	29	31.1	32
31	30	32.1	33
32	31	33.1	34
33	32	34.1	35
34	33	35.1	36
35	34	36.1	37

额定电流 Current rating: 0.5A
 额定电压 Voltage rating: 125V
 耐电压 Withstand voltage: 500V AC/minute
 接触电阻 Contact resistance : $\leq 30m\Omega$
 绝缘电阻 Insulation resistance: 100M Ω
 工作温度 Working temperature: $-20^{\circ}c \sim +80^{\circ}c$



深圳市华宇创精密电子有限公司

TOLERANCE:
 X.X ± 0.30
 X.XX ± 0.25
 X.XXX ± 0.15
 X' $\pm 2'$ X.X' $\pm 0.5'$

 UNIT: mm [inch]
 SCALE: 1:1 SIZE: A4

DRAWN BY : 陈一鸣
 CHECKED BY : 马跃
 APPROVED BY : 柯南

DATE : 2014-02-23
 DATE : 2014-02-23
 DATE : 2014-02-23

PART NAME: 1.0PH 2.85H卧式贴片双面接
 PART NO. HYCF2-10FPCXX-300
 MOLD NO.
 DRAW NO: HYC-FPC15122114
 SHEET NO. 1 OF 1