

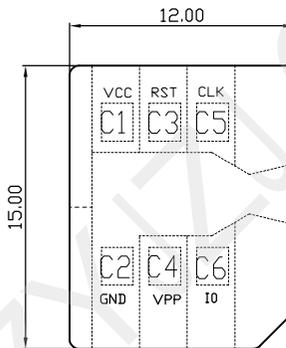
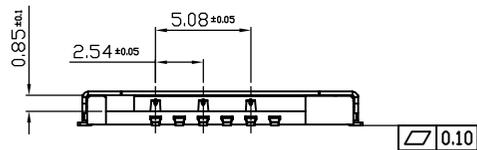


LOCK CARD TATUS

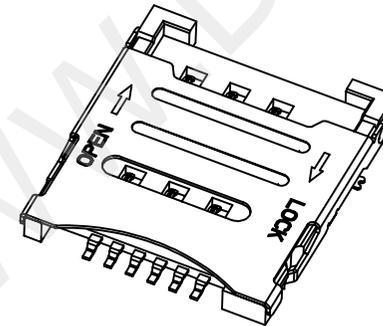


OPEN CARD TATUS

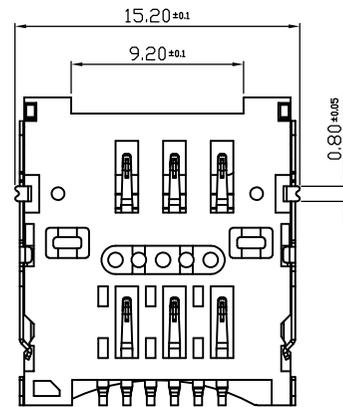

MICRO SIM

PIN NO.	NAME	PIN NO.	NAME
C1	VCC	C4	VPP
C2	GND	C5	CLK
C3	RST	C6	I/O

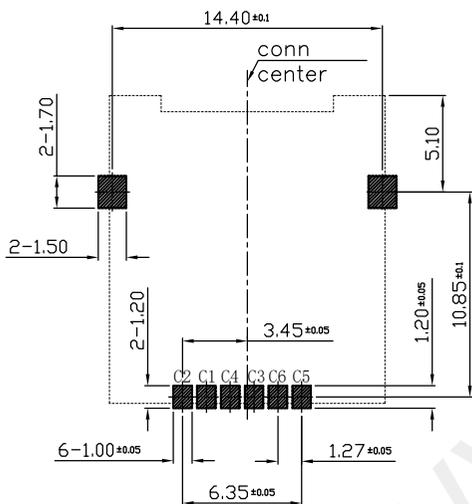

RECOMMENDED PCB LAYOUT (Top View)

GENERAL TOLERANCE ±0.05

NOTES:

- ELECTRICAL CHARACTERISTICS
 - CONTACT RESISTANCE: 60 Milliohms Max
 - INSULATION RESISTANCE: 1,000 Megohms Min.
 - VOLTAGE RATING: 50V.
 - CURRENT RATING: 1.0A.
- MECHANICAL CHARACTERISTICS
 - OPERATION TEMPERATURE RANGE: -20°C~+85°C
 - DURABILITY: 5000 CYCLES
- MATERIAL:
 - HOUSING: THERMOPLASTIC, UL 94-V0
 - TERMINAL: PHOSPHOR BRONZE, T=0.15mm
 - SHELL: STAINLESS STEEL, T=0.20mm
- FINISHED:
 - TERMINAL: Ni PLATED UNDER, 3U" Au MIN PLATED ON CONTACT AREA, AU PLATED ON SOLDER TAIL
 - SHELL: Ni PLATED UNDER, G/F PLATED ON SOLDER TAIL

ON

TAIL



深圳市华宇创精密电子有限公司

TOLERANCE: X.X ±0.30 X.XX ±0.25 X.XXX ±0.15 X.' ±2' X.X' ±0.5'	DRAWN BY : 陈一鸣	DATE : 2014-02-23	PART NAME: MICRO SIM 6P 掀盖1.8H
	CHECKED BY: 马跃	DATE : 2014-02-23	PART NO. : HYC299-SIM06-180
UNIT: mm [inch] SCALE: 1:1 SIZE: A4	APPROVED BY: 邱敏	DATE : 2014-02-23	MOLD NO. : /
			DRAW NO. : HYC-2111161443
			SHEET NO. : 1 OF 1